

It's not rocket science,
but following these
instructions will make
installing your seat covers
a lot easier.

We promise.

| | |
|-----------------|--|
| PART: | E82207 |
| PRODUCT: | CAT MINI EXCAVATOR SEAT COVER |
| PIECES: | (1) SEAT BACK COVER (1) SEAT BOTTOM COVER (1) HEADREST COVER |



*Basically, you break it, we buy it.
Seriously.*

Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

Install Cover

Start with the seat back. Undo all the velcro tabs on the cover. Slide cover over the headrest.

The flaps at the bottom should be facing you.



[View from back of seat]

Secure velcro flap up inside the headrest.

Work the cover the rest of the way down the seat back.


Push cover around the yellow knob on the back of the seat.

Push flaps from the front between the seat back and bottom. Pull tight and secure to velcro.



Pull seat bottom cover on. Push the flaps in between the seat back and seat bottom.

Fasten the three flaps under the headrest.

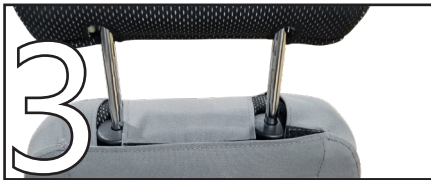

Fasten flap behind the seat.

Pull headrest cover on with the long velcro flap towards the front.



MISSION ACCOMPLISHED

