

It's not rocket science,  
but following these  
instructions will make  
installing your seat covers  
a lot easier.

We promise.

<b>PART:</b>	<b>E82230</b>
<b>PRODUCT:</b>	<b>DEERE BACKHOE SEAT COVER</b>
<b>PIECES:</b>	(1) SEAT COVER (1) STRINGLOCK



*Basically, you break it, we buy it.  
Seriously.*

**Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.**

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

### General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.  
Drip dry or machine tumble dry on a no heat cycle.  
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

# Install Seat Cover

Slide cover over seat back.



Pull strings tight and secure with StringLock (see next page).



Make sure the knob at the back of the cover comes through the gap for it.



Pull the tabs under the armrests tight and secure to the velcro on the back.



Put the bottom portion of the cover in place, making sure that the latch at the very front is exposed.





Finished!



Run the string in between the seat cushion and seat frame on each side.



# THE STRINGLOCK

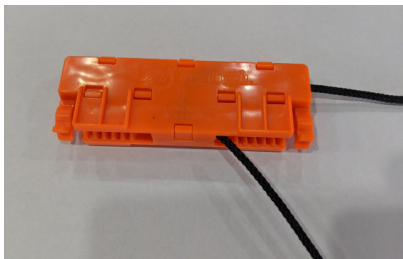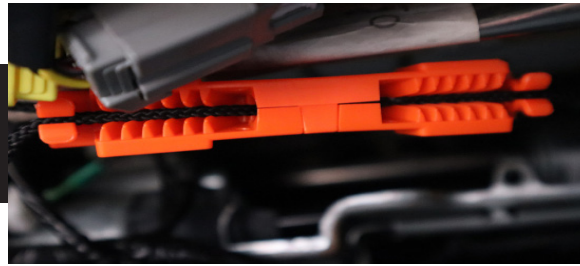


1

Run one string through the channel on the end of the StringLock.



2

Pull the string tight, pulling the StringLock towards one edge of the seat. Press the string into the clamp, locking it in place.

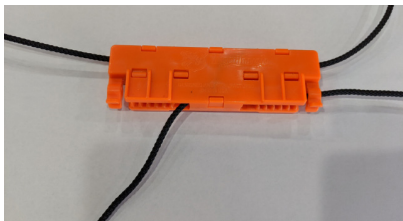

3

Run the second string through the StringLock just like the other one.



4

Pull the loose end of the second string until everything is tight and lock it into place as well.



Watch the video  
[ttcovers.com/stringlock](http://ttcovers.com/stringlock)