



Hey there!

It's not rocket science, but following the instructions will make installing your seat covers a lot easier. We promise.

If you have any questions, comments, or issues, we're here to help! You can reach us at 507.246.3545 (call or text) or email orders@tigertough.com.

PART NUMBER

T0511025

PRODUCT TYPE

BUCKET SEAT COVERS

PIECES

(1) DRIVER BACK

(1) DRIVER BOTTOM

(1) PASSENGER BACK

(1) PASSENGER BOTTOM

(2) HEADREST COVER

(2) STRINGLOCKS

Set does not include armrest covers.



*Basically, you break it, we buy it.
Seriously.*

Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right.

Depending on what is more practical, we'll either repair or replace the damaged cover.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent. Drip dry or machine tumble dry on a no heat cycle. Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

IMPORTANT: AIRBAG COMPATIBILITY

YOUR SEAT HAS SEAT SIDE AIRBAGS. For maximum safety in the event of a crash, these airbags **MUST NOT** be restricted.

Your cover has been engineered with a tearaway flap (stitched with white thread) that will allow the airbag to deploy. Ensure that this flap & the orange TigerTough tag are facing the door.

TigerTough is not responsible for any issues resulting from incorrectly installed seat covers.

1 - Preparation




- ❑ 1.1 - Slide seat forward and raise to highest position, if possible.
- ❑ 1.2 - Remove headrest by pressing in tabs at base of headrest and pulling up

2 - Install Seat Back Cover





- ❑ 2.1 - Undo elastic strap holding seat back flap from under seat bottom. (Black strap with white clip)
- ❑ 2.2 - Tip seat back flap up and tuck inside cover as you pull it down.
- ❑ 2.3 - Turn seat back cover 3/4 of the way inside out.
- ❑ 2.4 - Pull seat back cover over seat back, making sure the holes in the cover align with the holes in the seat back.
- ❑ 2.6 - Stretch the cover over the headrest holes.
- ❑ 2.7 - Continue pulling the cover down the seat back, turning it right side out as you go.
- ❑ 2.8 - Push flap from front of cover between seat and seat bottom, out the back of the seat.
- ❑ 2.9 - Pull flap tight and attach to Velcro on seat back.
- ❑ 2.10 - Fasten flap under armrest.

3 - Install Seat Bottom Cover

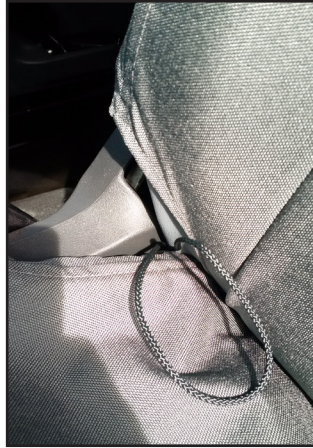

- 3.1 - Put cover over seat bottom.
- 3.2 - Tuck sides of cover behind plastic trim.
- 3.3 - Push strings between seat bottom and plastic trim. They will go through where the seat back and bottom meet. Strings must go UNDER round bar that runs through seat bottom.
- 3.5 - Pull strings tight.
- 3.6 - Secure strings with StringLock. See next page for StringLock instructions.
- 3.7 - Push top flap between seat back and seat bottom.
- 3.8 - Run front flaps under seat and OVER seat adjustment lever, wires, and brackets.
- 3.9 - Pull front flaps tight and fasten to Velcro on top flap.

THE STRINGLOCK

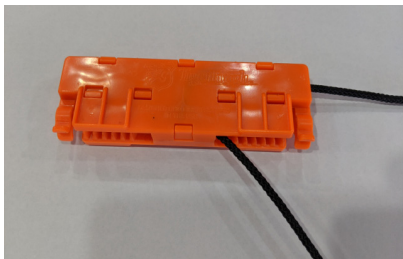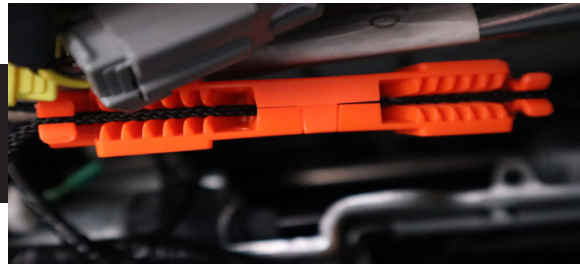

1

Run one string through the channel on the end of the StringLock.



2

Pull the string tight, pulling the StringLock towards one edge of the seat. Press the string into the clamp, locking it in place.



3

Run the second string through the StringLock just like the other one.



4

Pull the loose end of the second string until everything is tight and lock it into place as well.



Watch the video
ttcovers.com/stringlock

4 - Install Headrest Cover



- 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 4.2 - Pull cover over head rest with "loop" Velcro in front and "hook" Velcro in rear.
- 4.3 - Fasten Velcro tabs together under headrest.

Congratulations!

You have successfully installed your TigerTough Seat Cover.

**We're as impressed as you are! Tweet us a picture of your new covers @TigerToughGroup
(We like seeing pictures of your cruiser too)**



TigerTough.