


INSTALLATION GUIDE



T52125 Tactical Bucket Seat Set
FORD TRANSIT (2015-2019)

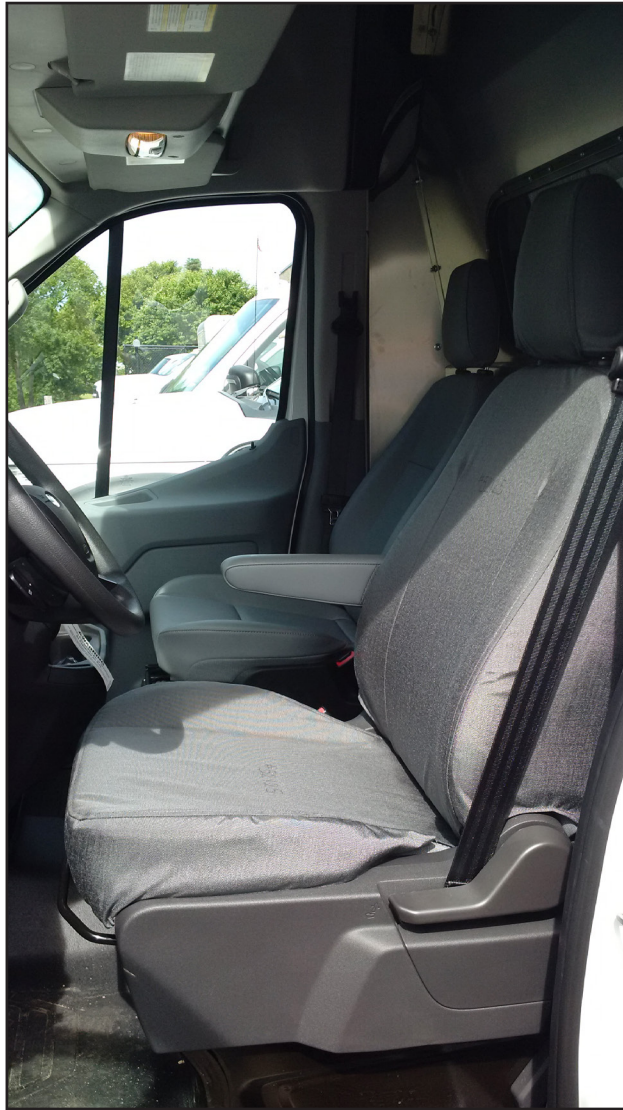

BILL OF MATERIALS

ITEM	QUANTITY
Driver Seat Back Cover	1
Driver Seat Bottom Cover	1
Passenger Seat Back Cover	1
Passenger Seat Bottom Cover	1
Headrest Cover	2

Seat Backs & Bottoms have tag signifying Driver or Passenger.

Ensure airbag patch (same side as the TigerTough tag) goes on the outside edge of the seat.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

1 - Preparation




- ❑ 1.1 - Slide seat forward and raise to highest position, if possible.
- ❑ 1.2 - Remove headrest by pressing in tabs at base of headrest and pulling up

2 - Install Seat Back Cover



- ❑ 2.1 - Undo elastic strap holding seat back flap from under seat bottom. (Black strap with white clip)
- ❑ 2.2 - Tip seat back flap up and tuck inside cover as you pull it down.
- ❑ 2.3 - Turn seat back cover 3/4 of the way inside out.
- ❑ 2.4 - Pull seat back cover over seat back, making sure the holes in the cover align with the holes in the seat back.
- ❑ 2.6 - Stretch the cover over the headrest holes.
- ❑ 2.7 - Continue pulling the cover down the seat back, turning it right side out as you go.
- ❑ 2.8 - Push flap from front of cover between seat and seat bottom, out the back of the seat.
- ❑ 2.9 - Pull flap tight and attach to Velcro on seat back.
- ❑ 2.10 - Fasten flap under armrest.

3 - Install Seat Bottom Cover

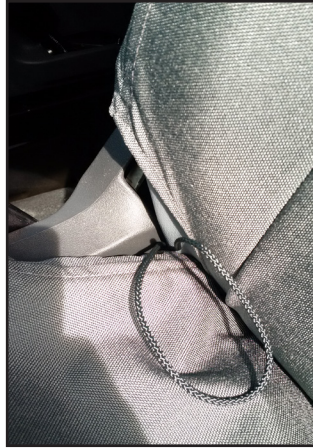

- ☐ 3.1 - Put cover over seat bottom.
- ☐ 3.2 - Tuck sides of cover behind plastic trim.
- ☐ 3.3 - Push strings between seat bottom and plastic trim. They will go through where the seat back and bottom meet. Strings must go UNDER round bar that runs through seat bottom.
- ☐ 3.5 - Pull strings tight.
- ☐ 3.6 - Tie a loop in one string. Run the other string through the loop, pull tight, and tie string back on itself. It is important to pull tight as this is what keeps your cover from shifting.
- ☐ 3.7 - Push top flap between seat back and seat bottom.
- ☐ 3.8 - Run front flaps under seat and OVER seat adjustment lever, wires, and brackets.
- ☐ 3.9 - Pull front flaps tight and fasten to Velcro on top flap.

4 - Install Headrest Cover



- ☐ 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- ☐ 4.2 - Pull cover over head rest with "loop" Velcro in front and "hook" Velcro in rear.
- ☐ 4.3 - Fasten Velcro tabs together under headrest.

Congratulations!
You have successfully installed your TigerTough Seat Cover.

**We're as impressed as you are! Tweet us a picture of your new covers @TigerToughGroup
(We like seeing pictures of your cruiser too)**

