



Hey there!

It's not rocket science, but following the instructions will make installing your seat covers a lot easier. We promise.

If you have any questions, comments, or issues, we're here to help! You can reach us at 507.246.3545 (call or text) or email [orders@tigertough.com](mailto:orders@tigertough.com).

**PART NUMBER**

**W0523027**

**PRODUCT TYPE**

**40/20/40 SEAT COVER**

**PIECES**

- (1) DRIVER BACK**
- (1) DRIVER BOTTOM**
- (1) PASSENGER BACK**
- (1) PASSENGER BOTTOM**
- (1) UPPER CONSOLE**
- (1) LOWER CONSOLE**
- (3) HEADREST COVER**
- (2) STRINGOCKS**



*Basically, you break it, we buy it.  
Seriously.*

**Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.**

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right.

Depending on what is more practical, we'll either repair or replace the damaged cover.

### **General care instructions:**

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent. Drip dry or machine tumble dry on a no heat cycle. Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

### **IMPORTANT: AIRBAG COMPATIBILITY**

**YOUR SEAT HAS SEAT SIDE AIRBAGS.** For maximum safety in the event of a crash, these airbags **MUST NOT** be restricted.

Your cover has been engineered with a tearaway flap (stitched with white thread) that will allow the airbag to deploy. Ensure that this flap & the orange TigerTough tag are facing the door.

TigerTough is not responsible for any issues resulting from incorrectly installed seat covers.

# Install Seat Back Cover

Slide the seat forward and raising it to the highest position to give you the most amount of working room.

Remove the headrest covers by pressing the tabs on the headrest mounts.



Press down around the headrest mounts to slide the material under the mounts for a clean look.

Detach carpet flap from the back of the seat bottom as shown below.



Work the cover the rest of the way down the seat back. Slide the flaps with Velcro between the seat back and bottom.

Unhook from seat bottom.



Pull down to detach from seat bottom.



Take the carpet flap that you released and tuck it up under the seat back cover.

Turn the seat back cover 3/4 of the way inside out, and slide onto seat back with the airbag patch and tag facing the door.



From behind the seat, fasten the flaps from the top and the flaps from the bottom together.

# Install Seat Bottom Cover

Place cover over seat bottom, lining up cover seams with factory seams.



Take the long flap from the seat back and fasten it to the velcro on the seat bottom.

Push the flaps between the back and the bottom of the seat. Tuck the sides of the cover between the plastic trim on the side of the seat. Drop the strings between the seat frame and seat cushion.





Now the back and bottom are done! Straighten, adjust and smooth the cover as needed.

Run the flap from the front of the seat underneath to the back, making sure to go above any seat adjustment levers or wires. Secure to flaps from the top.





Re-attach the headrest. Slide headrest cover on, and do up the velcro tab underneath.

Secure the strings together using the Stringlock device. (see next page)

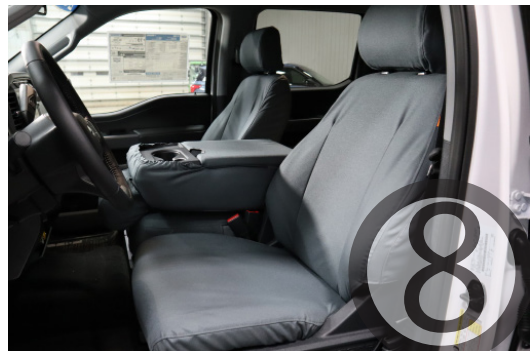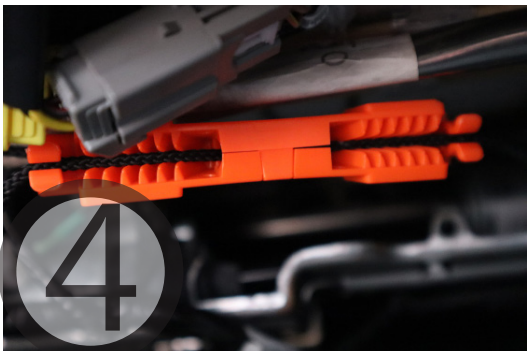

Repeat on the other side.

# THE STRINGLOCK

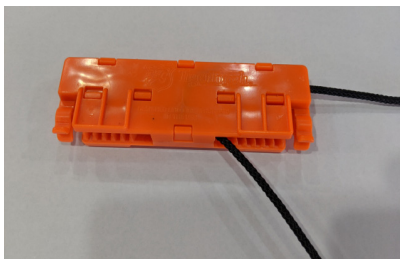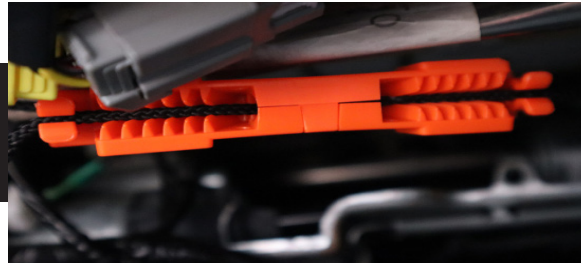


①

Run one string through the channel on the end of the StringLock.




②

Pull the string tight, pulling the StringLock towards one edge of the seat. Press the string into the clamp, locking it in place.

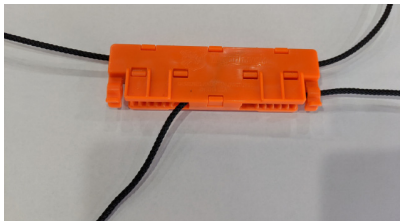

③

Run the second string through the StringLock just like the other one.

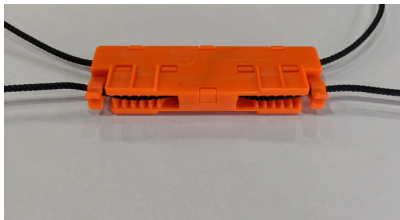

④

Pull the loose end of the second string until everything is tight and lock it into place as well.

# Install Console Cover

Open the bottom storage compartment. Turn the console bottom cover about 3/4 of the way inside out.



Arrange the console seat back cover as shown in the picture.

Work the cover down the seat bottom, making sure that the latch lines up with the hole in the cover and the seams are along the seat edges. The cover will be tight at first.



Feed the flap between the back and the bottom of the seat.

Flip the seat back forward. Push the long velcro flap between the seat back and bottom.



Push the cover down around the headrest holes, tucking the fabric under the edge. Fasten the velcro around the seat belt mount.

Pull flaps tight and secure together underneath the seat bottom.



Fasten the velcro along the edge of the top flap and side flap.



***TigerTough.***