



Hey there!

It's not rocket science, but following the instructions will make installing your seat covers a lot easier. We promise.

If you have any questions, comments, or issues, we're here to help! You can reach us at 507.246.3545 (call or text) or email [orders@tigertough.com](mailto:orders@tigertough.com).

**PART NUMBER**

**W0526005**

**PRODUCT TYPE**

**BUCKET SEAT COVERS**

**PIECES**

**(1) DRIVER BACK**

**(1) DRIVER BOTTOM**

**(1) PASSENGER BACK**

**(1) PASSENGER BOTTOM**


**(2) HEADREST COVERS**

**(1) CONSOLE COVER**

**VIDEO INSTRUCTIONS**

*case sensitive link*

**[ttcovers.com/52605](http://ttcovers.com/52605)**





*Basically, you break it, we buy it.  
Seriously.*

**Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.**

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

### **General care instructions:**

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent. Drip dry or machine tumble dry on a no heat cycle. Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

### **IMPORTANT: AIRBAG COMPATIBILITY**

**YOUR SEAT HAS SEAT SIDE AIRBAGS.** For maximum safety in the event of a crash, these airbags **MUST NOT** be restricted.

Your cover has been engineered with a tearaway flap (stitched with white thread) that will allow the airbag to deploy. Ensure that this flap & the orange TigerTough tag are facing the door.

TigerTough is not responsible for any issues resulting from incorrectly installed seat covers.

# Install Seat Cover

page 1

Slide the seat forward and raising it to the highest position to give you the most amount of working room.

Remove the headrest by pressing in the tab at the base, then pulling the headrest straight up.

Next, you'll need to unhood the carpet flap that runs under the back of the seat.

There are two elastic loops securing it. One loop is simply hooked on, the other is around this orange connector.

Pull down on the orange connector to unclip it from the seat bottom and release the elastic strap. (the video shows this better.)

Place the seat bottom cover on with the long flaps at the front.


Push the tabs between the seat back and bottom.

Folding them over on themselves helps them to not stick going through.

Tipping the seat back forward gives you a little more room.



Drop the string by the console down to the floor.

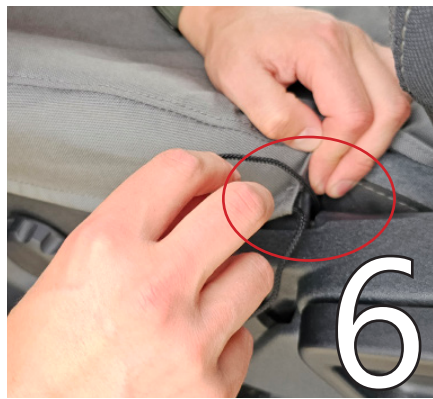

Drop the string closest to the door between the plastic trim and the seat cushion to run it on the inside of the seat frame.



Tuck the edge behind the plastic trim for a nice finished look.




Run the long flaps under the seat to the back.

Be sure to pass above the metal adjustment bar.

# Install Seat Cover

page 2

From the back of the seat, pull the strings tight and secure with the StringLock (see next page)

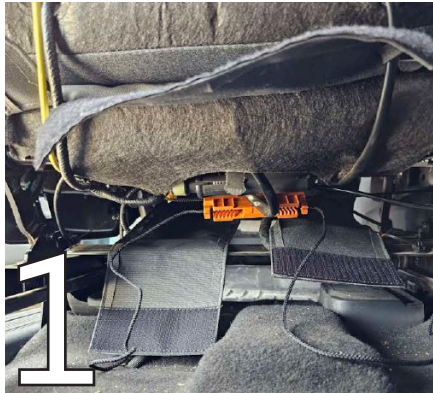

Unroll the cover the rest of the way down the seat back.

Pull the flaps tight and secure to the flaps pushed through from the top.



Push the tabs through to the back.

Folding them over on themselves helps them to not stick on the way through.

Tip the seat back a little to give more working room.

Next - the seat back.

Turn the seat back partly inside out. Slide it down so it's snug against the top of the seat.



Pull the tabs tight and secure at the back.

Pulling the outer tabs first and the center flap last to give the best fit.




Work the cover over the headrest mounts as shown.



Tip the seatback forward and secure the finishing flap.

You'll need to have the seatback tipped for this step, otherwise the flap will be too taught to let the seat fold forward to get into the back seat!

# THE STRINGLOCK

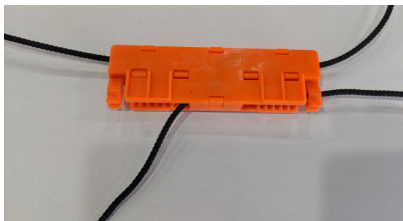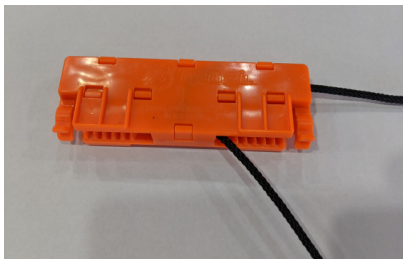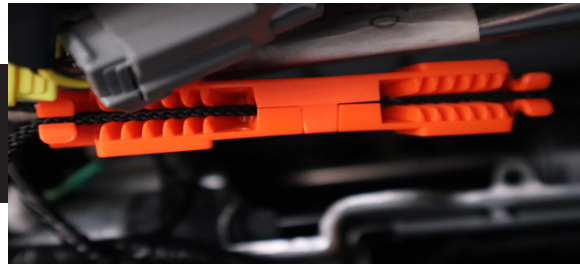

1

Run one string through the channel on the end of the StringLock.

2

Pull the string tight, pulling the StringLock towards one edge of the seat. Press the string into the clamp, locking it in place.

3

Run the second string through the StringLock just like the other one.

4

Pull the loose end of the second string until everything is tight and lock it into place as well.



Watch the video  
[ttcovers.com/stringlock](http://ttcovers.com/stringlock)

# Install Seat Cover

page 1


Slide the headrest cover on with the flap at the front.



Slide the armrest cover on as shown.



Secure the flap up inside the back of the headrest cover.

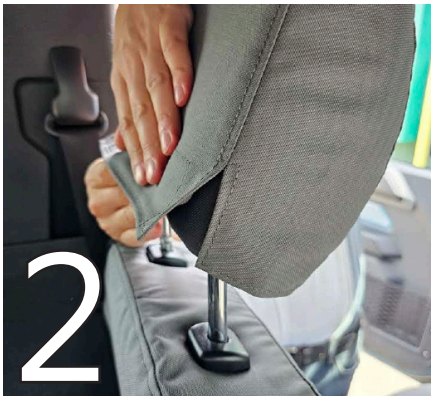

Push the flap between the hinges, and secure it inside the cover.



You're finished!