



Hey there!

It's not rocket science, but following the instructions will make installing your seat covers a lot easier. We promise.

If you have any questions, comments, or issues, we're here to help! You can reach us at 507.246.3545 (call or text) or email orders@tigertough.com.

PART NUMBER

W0555036

PRODUCT TYPE

40/60 SEAT COVER

PIECES

(1) 60 BACK

(1) 60 BOTTOM

(1) 40 BACK

(1) 40 BOTTOM

(2) SEAT HEADRESTS

(1) CENTER HEADREST



*Basically, you break it, we buy it.
Seriously.*

Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

General care instructions:



1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent. Drip dry or machine tumble dry on a no heat cycle. Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

1 - Preparation





- 1.1 - Remove headrests by pressing in tabs at base of headrest and pulling up.
- 1.2 - Remove seatbelts from the guides on the seat back.

2 - Install Seat Bottom Cover

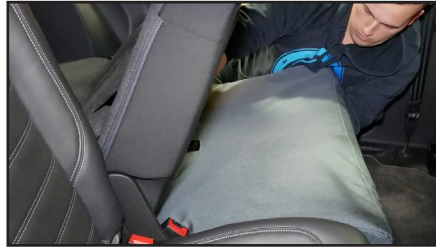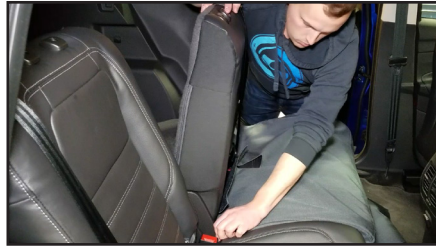

- 2.1 - Loosely fit cover over seat bottom.
- 2.2 - Push flap nearest to the middle into split between seat cushions
- 2.3 - Push flap nearest the door behind the recline lever on the side of the seat bottom.
- 2.4 - Lean seat back slightly forward and push the Velcro flap between the seat back and bottom.
- 2.5 - Pull flap that went between the seats tight and fasten to Velcro flap that went between the seat back & bottom.
- 2.6 - Repeat on the other side.
- 2.7 - Pull the two center Velcro pieces from the front tight and attach them to the Velcro flaps from the back.
- 2.8 - Repeat on the passenger's side.

3 - Install Seat Back Cover

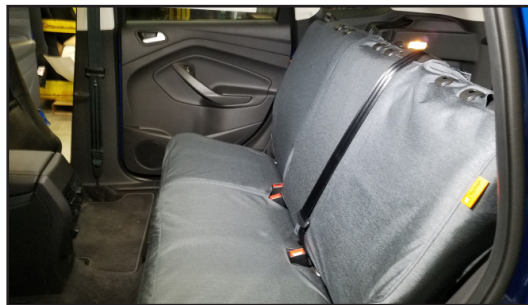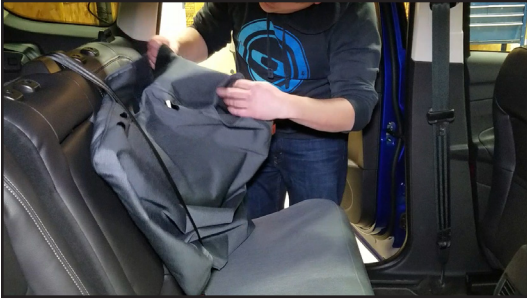

- 3.1 - Put seat cover over seat back, behind the middle seat belt.
- 3.2 - Push the holes on top of the cover around the headrest base pieces.
- 3.3 - Fold seat back down.
- 3.4 - Fasten the vertical velcro on the back of the seat together, starting at the bottom.
- 3.5 - Fold seat back up.
- 3.6 - Push the flap from the front between the seat back and bottom.
- 3.7 - Fold seat back down.
- 3.8 - Pull tight and attach it to the Velcro on the back of the seat.
- 3.9 - Repeat for passenger's side.
- 3.10 - Put seat belts back in their plastic guides.

4 - Install Headrest Cover



- 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 4.2 - Pull cover over head rest with the long flap in the front.
- 4.3 - Fasten Velcro tabs together under headrest.