


How to...

Using a JOHN GUEST 'QUICKFIT' / 'SPEEDFIT' FITTING

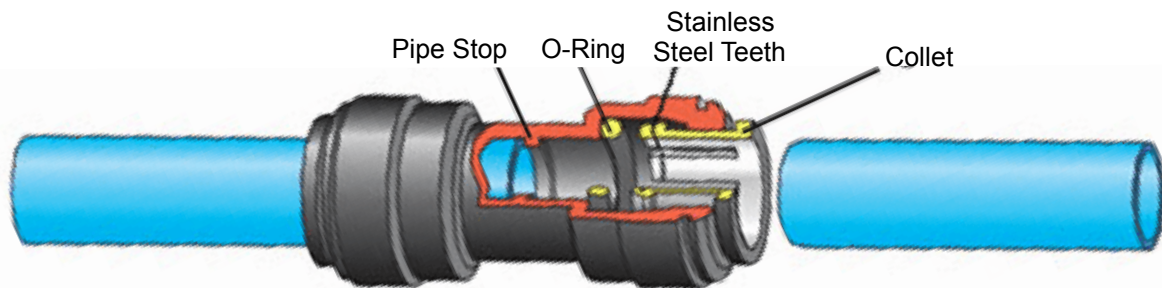


TO INSTALL PIPE/TUBE:

Simply push the pipe in until it is seated firmly. Ensure the end of the pipe is square with no burrs. Push LOCKING CLIP into place (if applicable).

The John Guest push-in fitting has a Collet with stainless steel teeth, which holds the pipe firmly in position and an o-ring to provide a permanent leak-proof seal.

RELEASE SECTION (Collet)

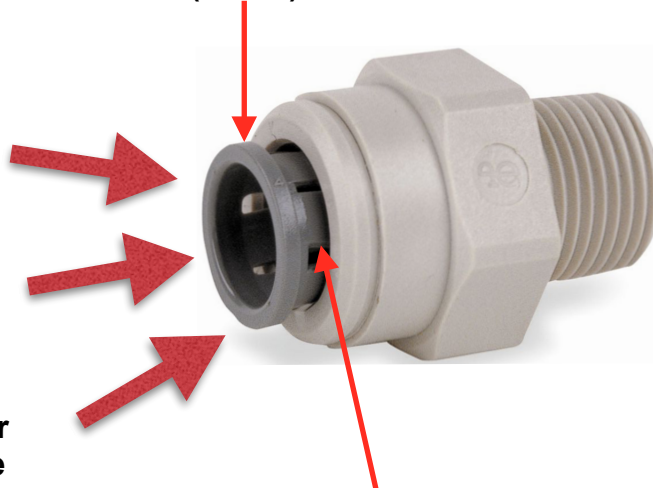

TO RELEASE TUBE/PIPE:

Remove LOCKING CLIP. Push the RELEASE SECTION (Collet) towards the fitting, which will cover the S/S teeth and allow the pipe to be removed.

LOCKING CLIP is usually located/installed here.

LOCKING CLIP
(if applicable) - not always needed or present

