




Available at signature radiant.ca

**3 WIRE APPLICATION
(FOR INSTALLING ONE HEATER WITH TWO ELEMENTS)**

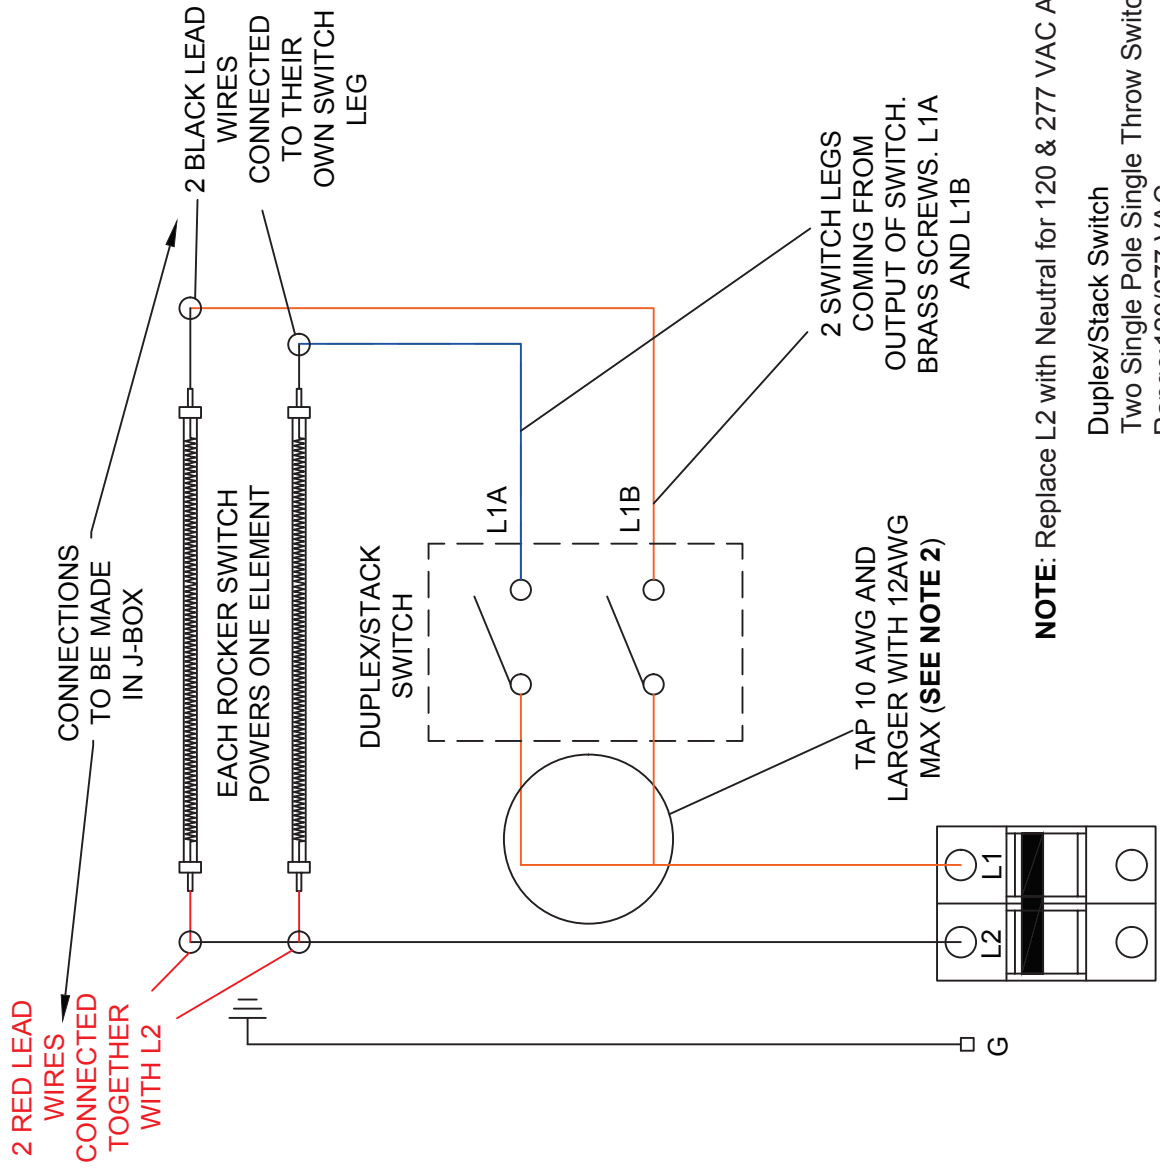

NOTE: Replace L2 with Neutral for 120 & 277 VAC Applications.

- Duplex/Stack Switch
- Two Single Pole Single Throw Switches
- Range: 120/277 VAC
- Recommended not to Exceed
- 120 VAC = 1800 Watts Max-Per Switch
- 208/220 VAC = 3000 Watts Max-Per Rocker Switch
- 240/277 VAC = 4000 Watts Max-Per Rocker Switch
- 20 Amps Max-Per Rocker Switch

NOTES:

1. **EACH INDIVIDUAL ROCKER SWITCH IS RATED FOR 20 AMPS MAX. (EG: ONE 6000 WATT 240VAC HEATER CAN BE CONTROLLED BY ONE DUPLEX STACK SWITCH ASSEMBLY WHEN THE CIRCUIT IS TAPPED CORRECTLY).**
2. **FOR TAPPING RULES, SEE NEC 210.24. LARGE BLUE WIRE NUT PROVIDED. USE OTHER EQUIVALENT METHOD IF PREFERRED.**
3. **ONE LINE ALWAYS HOT WHEN DUPLEX STACK SWITCHES ARE IN OFF POSITION. DISCONNECT MUST BE PROVIDED WITHIN VICINITY OF HEATER FOR SERVICING THAT OPENS ALL UNGROUNDED CONDUCTORS. REFER TO LOCAL CODE AND NATIONAL CODE FOR DISCONNECT LOCATION.**

INFRA TECH™
www.infrotech-usa.com

344 W 157th Street
Gardena, California 90248
Phone: (310) 354-1250
Fax: (310) 523-3674

DESCRIPTION

DUPLEX/STACK SWITCH WIRING
120/277 VAC 20 AMP PER ROCKER
SWITCH

DATE	ITEM#	N/A
Dec. 17 2019	DRAWN BY:	CL

NOTE: ALL INFRA TECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN