

4-Port 10/100/1000 Industrial Managed Switch with (2) SFP Slots and (2) PoE/PoE+ PSE Ports

SF70460MP

Product Features

- Supports multiple functions:
 - ⇒ Dual media converter mode
 - ⇒ Dual media converters sharing redundant fiber mode
 - ⇒ Fiber-to-Fiber media converter mode
 - ⇒ 4-Port switch mode
- (2) 10/100/1000Mbps RJ-45 ports and (2) 100/1000Mbps SFP slots
- Copper ports with auto-negotiation and auto-MDI/MDI-X detection
- Supports 802.3x flow control for full duplex operation
- Supports back-pressure flow control for half-duplex operation
- Supports Link Fault Pass Through (LFPT)
- Supports Redundant Ring function in switch mode
- Supports Gigabit full wire speed bridging & forwarding performance
- Supports jumbo frames up to 9600 bytes
- Supports alarm feature for power failure and port link down
- Supports green Ethernet power saving
- Supports 802.3az Energy Efficient Ethernet
- Supports stand-alone, DIN Rail, or Panel Mounting



Technical Specifications

IEEE Standards:	802.3, 802.3ab, 802.3z, 802.3x, 802.3at, 802.1x, 801.1w, 802.1D, 802.1Q
Network Ports:	(2) 10/100/1000Mbps Copper Ports (RJ-45) (2) 100/1000Mbps Fiber SFP Slots
Copper Ports:	Shielded RJ-45, 10/100Mbps, auto-negotiation, auto-MDI/MDI-X
SFP Slot:	100/1000Base-FX compliant slot for standard SFP transceiver
Network Cables:	Copper Port: Cat5 or higher up to 100 meters SFP Slot: 50/125, 62.5/125 MM Fiber, 9/125 SM Fiber
Power over Ethernet:	IEEE 802.3at compliant Power delivery 30W max. per port up to 100 meters
MAC Addresses:	Table with 8K entries
Relay Output:	Alarm: Power Failure, Port Link Down Interface: (3) Terminal Contacts (30VDC/1A max. or 120VAC/0.5A max.)
DC Power Input:	Screw Terminal Block: DC +/- contacts Operating Voltage Range: +12 ~ +57VDC PoE Voltage Range: +45 ~ +57VDC
Power Consumption:	6W @ 56V max. (Full load without PoE support) 66W @ 56V max. (Full load with (2) PoE+ PSE max. output)

4-Port 10/100/1000 Industrial Managed Switch with (2) SFP Slots and (2) PoE/PoE+ PSE Ports

SF70460MP

Technical Specifications cont.

Web Management:	Web, telnet, SNMP System Settings, Port Status/Statistics, Port Control, VLAN, QoS, Security, Spanning Tree, IGMP, DHCP, Firmware Upgrade 802.1x, 802.1w, Configuration Backup and Restore
LED Indicators:	Per Unit: Power, Management Status Per Port: Speed/Link/Activity Status Per SFP Slot: Speed/Link/Activity Status Per PoE Port: Power Status
Dimensions:	1.65 x 4.17 x 5.51 inches (W x D x H) 42 x 106 x 140 mm (W x D x H)
Mounting:	Stand-alone, DIN Rail, or Panel Mounting
Environment:	Operating Temperature: -40° C ~ +70° C Storage Temperature: -40° C ~ +85° C Relative Humidity: 5% to 95% non-condensing
Approvals:	FCC Part 15 Class A, VCCI Class A, CE Mark Class A, EN60950-1 Safety, EN61000-6-4 emission, EN61000-3-2, EN61000-3-3, EN61000-6-2 Immunity for industrial environments, IEC60068-2-64 Vibration, IEC60068-2-27 Shock




SF70460MP Top View


**4-Port 10/100/1000 Industrial Managed Switch
with (2) SFP Slots and (2) PoE/PoE+ PSE Ports**

SF70460MP

Port Configuration

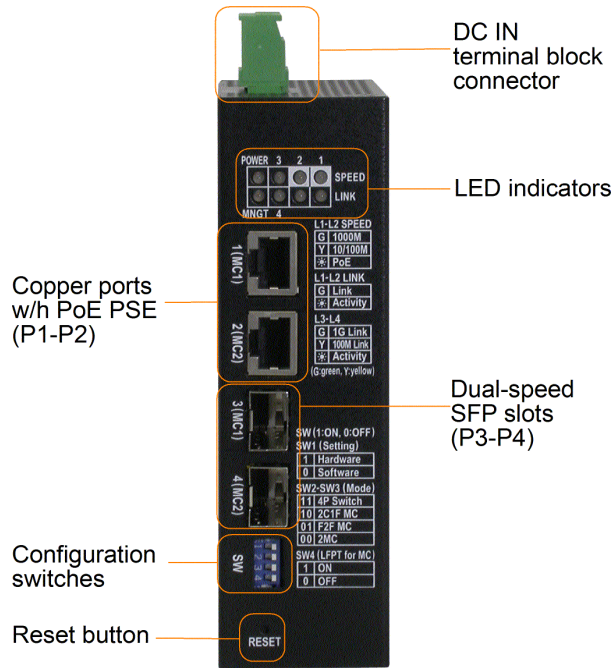

Power Connections

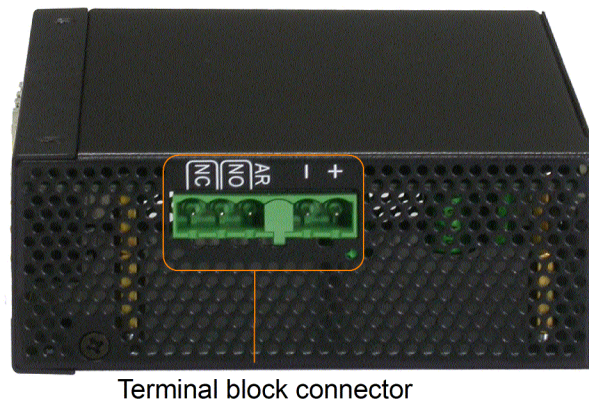

**4-Port 10/100/1000 Industrial Managed Switch
 with (2) SFP Slots and (2) PoE/PoE+ PSE Ports**
SF70460MP
Available SFP Modules

Model	Speed (Mbps)	Wavelength	Media	Distance	Connector	TX Power	RX Sens	Temp
FEMM	100	850nm	MMF	62.5µ: 220m 50µ: 550m	LC	-10 ~ -4	< -24	0 to 70° C
FE2MM	100	1310nm	MMF	2km	LC	-20 ~ -4	< -31	0 to 70° C
FE10SM	100	1310nm	SMF	10km	LC	-15 ~ -8	< -34	0 to 70° C
GBMM	1000	850nm	MMF	62.5µ: 220m 50µ: 550m	LC	-9.5 ~ -4	< -18	0 to 70° C
GB2MM	1000	1310nm	MMF	2km	LC	-9 ~ -1	< -19	0 to 70° C
GB10SM	1000	1310nm	MMF / SMF	MM 62.5µ: 220m MM 50µ: 550m SM 9µ: 10km	LC	-9.5 ~ -3	< -20	0 to 70° C
GB20SM	1000	1310nm	SMF	20km	LC	-4 ~ +1	< -24	0 to 70° C
GB40SM	1000	1550nm	SMF	40km	LC	-4 ~ +1	< -24	0 to 70° C
GB70SM	1000	1550nm	SMF	70km	LC	0 ~ +5	< -24	0 to 70° C
GB100SM	1000	1550nm	SMF	100km	LC	0 ~ +5	< -30	0 to 70° C
GB10SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	10km	LC	-3 ~ -9	< -21	0 to 70° C
GB10SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	10km	LC	-3 ~ -9	< -21	0 to 70° C
GB20SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	20km	LC	-3 ~ -8	< -23	0 to 70° C
GB20SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	20km	LC	-3 ~ -8	< -23	0 to 70° C
GB40SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	40km	LC	-3 ~ +2	< -23	0 to 70° C
GB40SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	40km	LC	-3 ~ +2	< -23	0 to 70° C
GB60SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	60km	LC	0 ~ +5	< -24	0 to 70° C
GB60SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	60km	LC	-2 ~ +4	< -25	0 to 70° C
GB80SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	80km	LC	-2 ~ +3	< -26	0 to 70° C
GB80SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	80km	LC	-2 ~ +3	< -26	0 to 70° C

CWDM and DWDM modules are also available. Call for details.