

Remote Satellite Systems Int.
1455 N. Dutton Ave
Santa Rosa, CA 95401
(707)-545-8199

SPECIFICATIONS:

Power: +12V ~ +36V DC, 500mA

Audio Level: Main Speaker 3.1W max
Telephone: 350mW max
Headphone: 150mW max

Size: 167mm(L) x 69mm(W) x 35mm(D)

Display: 128 x 64 bit mono transfective

Radio Interface: Ligdao MSAT-G2

Connection: RJ-45 / Booted RJ45

Moisture/Sand Standards: IP55

REMOTE SATELLITE SYSTEMS INT'L

1455 NORTH DUTTON AVE

SANTA ROSA CA 95401

(888) 989-8199

SALES@REMOTESATELLITE.COM

IPR750
MSAT-G2 HANDSET



AUDIO TEST SOLUTIONS, INC. &
REMOTE SATELLITE SYSTEMS INT'L



Increase Brightness

Activate Backlight

Decrease Brightness

BRIGHTNESS CONTROLS

RJ-45 Connector that can be replaced when worn.
Standard CAT-5 pinout, straight through wiring.
Contact ATSI for replacement parts.

4 pole 2.5mm headphone jack



Headphone Pinout

1 - Left Headphone


2 - Right Headphone

3 - Microphone

4 - Ground



CABLE ENTRY/HEADPHONE

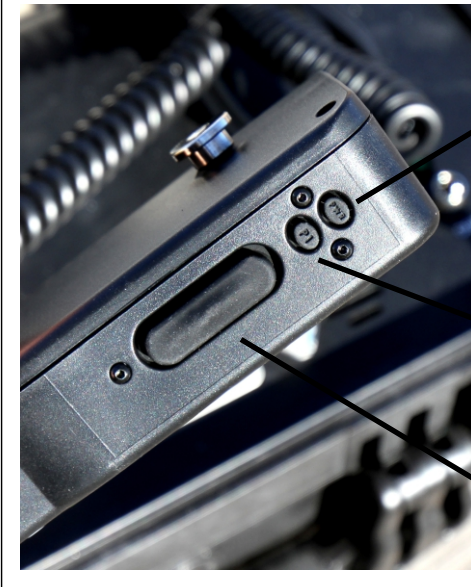

Power Button:
Press and Hold to
cycle power

P1 Button:
Press to Activate

Push To Talk:
Press to Activate

PTT/PWR/P1



Sealed Boot:
Seals RJ45 Entry

SEALED BOOT



MICROPHONE HANGUP