


BRIK[®]

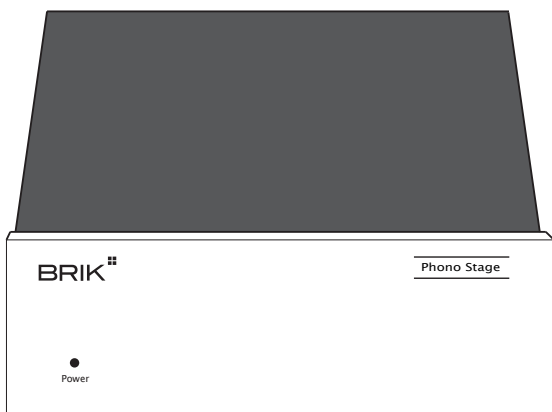

Phono Stage User Manual

BRIK^{II}

Dear User,

Thank you for purchasing BRIK **Phono Stage**.

Please read this User Manual before operating the machine to ensure its best performance and your safety.

Instructions:

Selecting Cartridge

- Use the switch on the rear panel to select the **Phono Cartridge MM** (moving magnet) or **MC** (moving coil) according to the turntable spec.

Connecting Turntable

- Connect the turntable output to **Phono Stage Input** on the rear panel.
- Loosen **GND** screw and connect the turntable's earthing wire, and then fasten **GND** screw securely to prevent interference (hum).

Connecting Amplifier

- Connect the **Output** socket to a line input on an amplifier.

WARNING: Please be aware **NOT** to connect this **Phono Stage**'s output to the amplifier's Phono input if it has one.

Connecting Power

- Before connecting, check the label to ensure the local power supply is compliant, and then connect the low voltage plug from the power supply to the **12V In** socket and switch the machine on.
- Only use approved BRIK power supply. The use of other adaptors or supplies could seriously damage this item.

BRIK^{II}

Phono Stage



Power

Specifications:

	MM	MC
INPUT SENSITIVITY	4 - 6 mV	0.4 - 0.6 mV
OUTPUT LEVEL	500- 550 mV	500- 550 mV
MAXIMUM INPUT	> 80 mV	> 8 mV
MAXIMUM OUTPUT	> 8 V	> 8 V
INPUT IMPEDANCE	46 - 56 K Ω	80 - 120 Ω
OUTPUT IMPEDANCE	< 680 Ω	< 680 Ω
GAIN (1 KHz)	38- 42 dB	58 - 62 dB
DISTORTION (5mV INPUT)	< 0.1 %	< 0.3 %
S/N (A WEIGHTING)	> 65 dB	> 55 dB
RIAA ACCURACY	\pm 1dB	\pm 1dB
CHANNEL BALANCE	< 0.5 dB	< 0.5 dB
CHANNEL SEPARATION	> 60 dB	> 50 dB
DIMENSION	W 140 x H 48 x D160 mm	
WEIGHT	1000 g	


NOTE

- BRIK **Phono Stage** operates in accordance with its specifications within environment temperature 40 degrees Celsius.

WARNING

- Never open the case of this item as this will invalidate the guarantee. There are no user adjustments inside. Please refer all service work to an authorized BRIK agent.

- This item shall not be exposed to dripping or splashing liquid, and that no objects filled with liquids, such as vases, shall be placed on the apparatus.

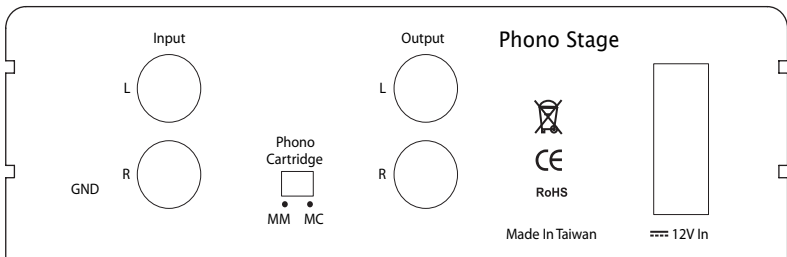

BRIK 
WWW.BRIK-AUDIO.COM

CE  **RoHS**

The information was correct at the time of going to press. The manufacturer reserves the rights to make changes to the technical specification without prior notice.

The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or change to any part of the product by unauthorized persons releases the manufacturer from any liability over and above the lawful rights of the customer.

©BRIK 2011