





FOTON

HYBRID SOLAR INVERTER FOTON 6.5

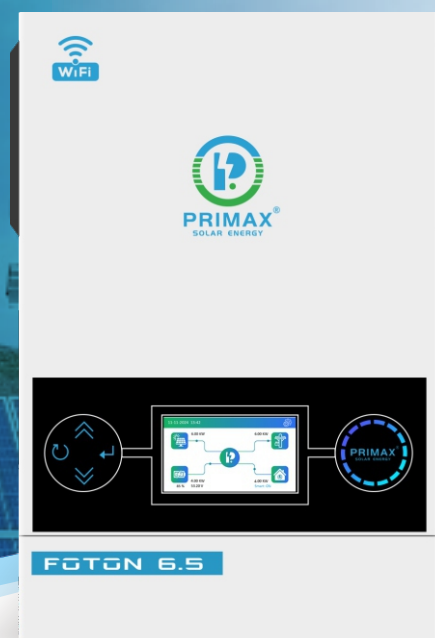

FEATURES

- Enhanced inverter output power under PV mode
- BMS communication , support lithium battery
- Touch LCD screen ,intuitive parameter display, convenient for user operation
- Touch button as an alternative operating method
- Novel and fashionable RGB atmosphere lights indicator
- Dual Output with Pure sine wave
- 6500W high PV input, support more panels
- Support WiFi monitoring & setting
- Working with or without battery

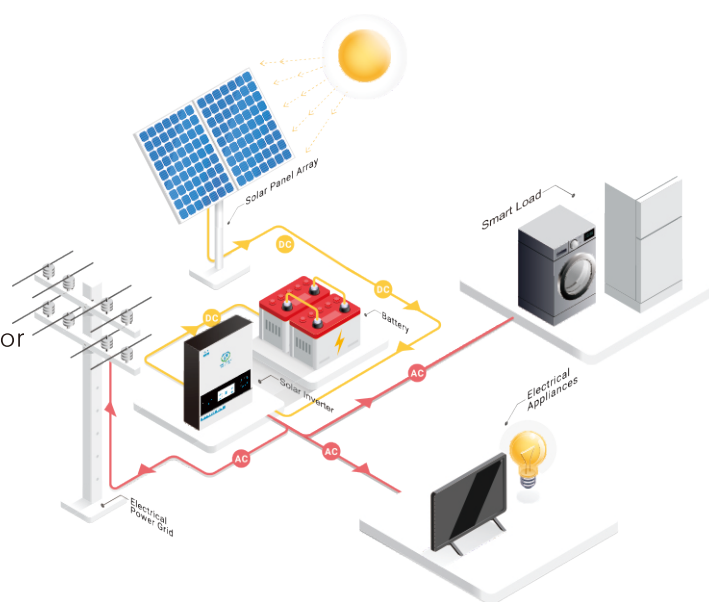

HIGH
PV INPUT

BMS

SUPPORT
LITHIUM BATTERY



TOUCH
LCD SCREEN



DUAL
OUTPUT



WIFI
MONITORING



UPDATE
OTA FIRMWARE

FOTON 6.5


PARAMETERS

Model		FOTON 6.5
Input	Phase	Single Phase
	Nominal Voltage	220/230/240VAC
	Voltage Range	90~280VAC±3V (Normal Mode) 170~280VAC±3V (UPS Mode)
	Frequency Range	50Hz/60Hz (Adaptive)
Output	Rated Power	4500W
	PV Mode	4500W
	Battery Mode/AC Mode	4000W
	Output Voltage (AC)	220/230/240VAC±5%
	Output Frequency	50/60Hz±0.1%
	Dual Output Rated Power	Main Load: 4000W , Second Load : 4000W
	Waveform	Pure Sine Wave
	Transfer Time (Adjustable)	10ms for Computer , 20ms for Home Appliances
	Peak Power	8000VA
	Overload (Battery Mode)	105%~150% Load: 11s ; 150%~200% Load: 2s ; >200% Load: 400ms
	Peak Efficiency (Battery Mode)	>94%
Grid-tie	Output Voltage	220/230/240VAC
	Feed-in Grid Voltage	175 - 265 VA
	Feed-in Grid Frequency Range	49-51±1Hz/59-61±1Hz
	Rated Feed-in Grid Current	17.4A
	Peak Efficiency (DC/AC)	98%
Battery	Rated Voltage	24 VDC
	Constant Voltage Charging Voltage	28.2VDC (Adjustable)
	Floating Charge Voltage	27VDC (Adjustable)
Charger	PV Charging Method	Single MPPT
	PV Max Input Power	6500W
	MPPT Tracking Range	60~500 VDC
	Best PV Voltage Range	300~400 VDC
	Max PV Input Voltage	500 VDC
	Max PV Input Current	27A
	Max PV Charging Current	120A
	Max AC Charging Current	100A
Communication Port	RS232	For External WiFi device / Monitoring & Update
	RS485	For BMS Communication
	Dry Connect	Support sending signal to start generator
	Parallel Function	No
Environmental parameters	Operating environment temperature	-10~50℃
	Operating environment humidity	20%~95% (Non condensing)
	Storage temperature	-15~60℃
	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m
	Noise	≤50db
Certifications		IEC 62109-1, IEC 62109-2, IEC 61683




FOTON

HYBRID SOLAR INVERTER FOTON 8.5

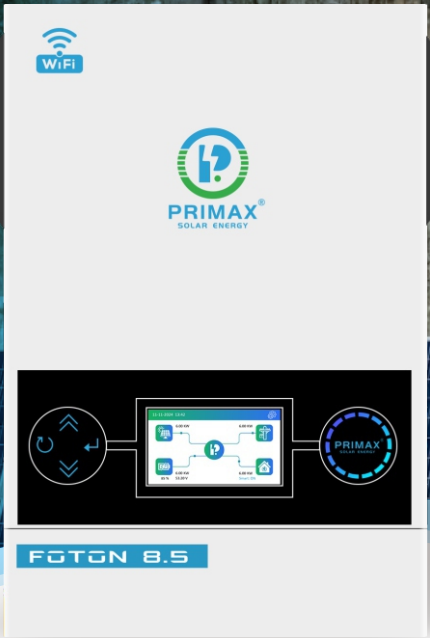

FEATURES

- Enhanced inverter output power under PV mode
- BMS communication , support lithium battery
- Touch LCD screen ,intuitive parameter display, convenient for user operation
- Touch button as an alternative operating method
- Novel and fashionable RGB atmosphere lights indicator
- Dual Output with Pure sine wave
- 8500W high PV input, support more panels
- Support WiFi monitoring & setting
- Working with or without battery

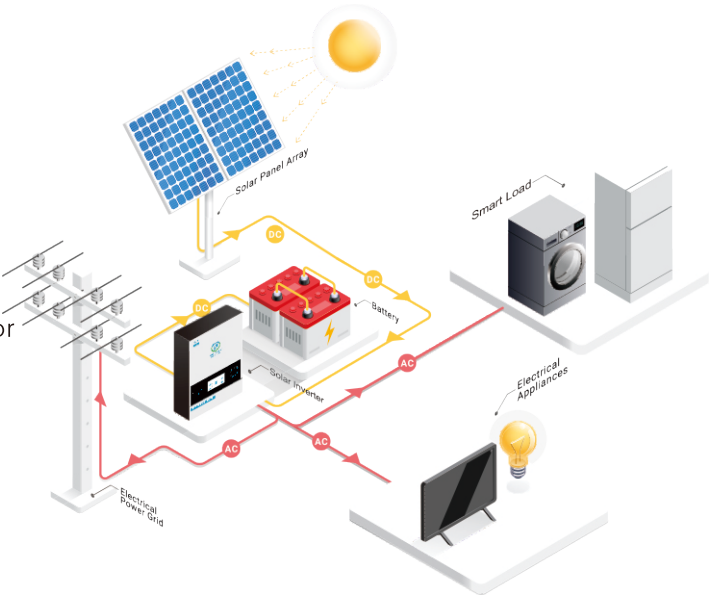

HIGH
PV INPUT



SUPPORT
LITHIUM BATTERY



TOUCH
LCD SCREEN



DUAL
OUTPUT



WIFI
MONITORING



UPDATE
OTA FIRMWARE

FOTON 8.5


PARAMETERS

Model		FOTON 8.5
Input	Phase	Single Phase
	Nominal Voltage	220/230/240VAC
	Voltage Range	90~280VAC±3V (Normal Mode) 170~280VAC±3V (UPS Mode)
	Frequency Range	50Hz/60Hz (Adaptive)
Output	Rated Power	6500W
	PV Mode	6500W
	Battery Mode/AC Mode	6200W
	Output Voltage (AC)	220/230/240VAC±5%
	Output Frequency	50/60Hz±0.1%
	Dual Output Rated Power	Main Load: 6200W , Second Load : 6200W
	Waveform	Pure Sine Wave
	Transfer Time (Adjustable)	10ms for Computer , 20ms for Home Appliances
	Peak Power	12400VA
	Overload (Battery Mode)	105%~150% Load: 11s ; 150%~200% Load: 2s; >200% Load: 400ms
	Peak Efficiency (Battery Mode)	>94%
Grid-tie	Output Voltage	220/230/240VAC
	Feed-in Grid Voltage	175 - 265 VA
	Feed-in Grid Frequency Range	49-51±1Hz/59-61±1Hz
	Rated Feed-in Grid Current	26.9A
	Peak Efficiency (DC/AC)	98%
Battery	Rated Voltage	48 VDC
	Constant Voltage Charging Voltage	56.4VDC (Adjustable)
	Floating Charge Voltage	54VDC (Adjustable)
Charger	PV Charging Method	Single MPPT
	PV Max Input Power	8500W
	MPPT Tracking Range	60~500 VDC
	Best PV Voltage Range	360~430 VDC
	Max PV Input Voltage	500 VDC
	Max PV Input Current	27A
	Max PV Charging Current	120A
	Max AC Charging Current	100A
Communication Port	RS232	For External WiFi device / Monitoring & Update
	RS485	For BMS Communication
	Dry Connect	Support sending signal to start generator
	Parallel Function	No
Environmental parameters	Operating environment temperature	-10~50℃
	Operating environment humidity	20%~95% (Non condensing)
	Storage temperature	-15~60℃
	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m
	Noise	≤50db
Certifications		IEC 62109-1, IEC 62109-2, IEC 61683




FOTON

HYBRID SOLAR INVERTER FOTON 8.5P

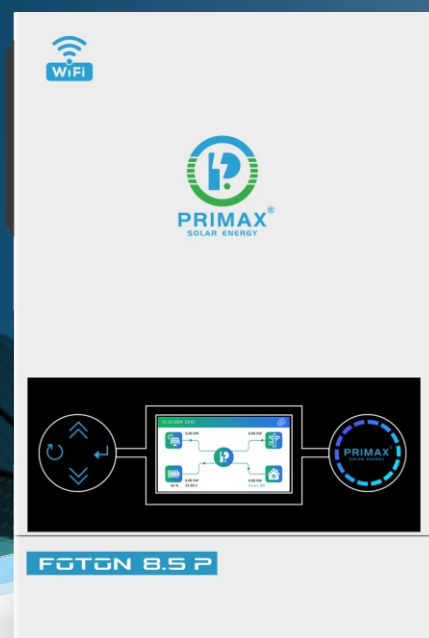

FEATURES

- Support Parallel function, maximum 9 units
- Enhanced inverter output power under PV mode
- BMS communication , support lithium battery
- Touch LCD screen ,intuitive parameter display, convenient for user operation
- Touch button as an alternative operating method
- Novel and fashionable RGB atmosphere lights indicator
- Dual Output with Pure sine wave
- 8500W high PV input, support more panels
- Support WiFi monitoring & setting
- Working with or without battery

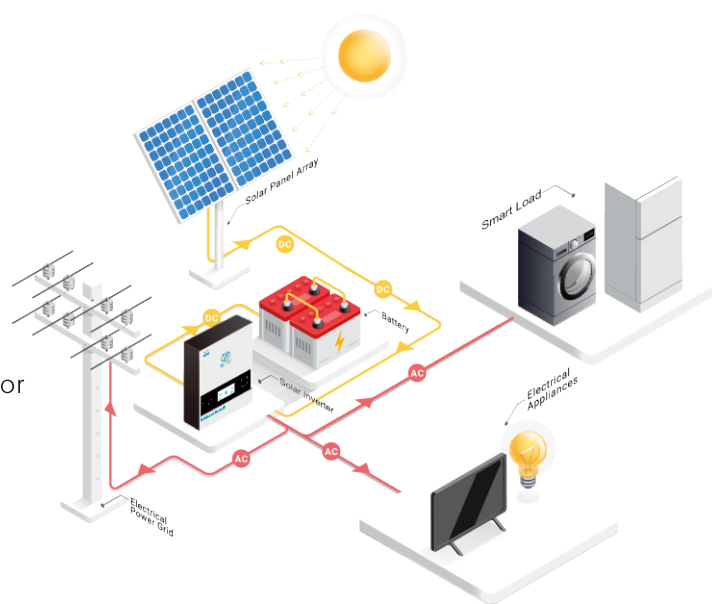

HIGH
PV INPUT

BMS

SUPPORT
LITHIUM BATTERY



TOUCH
LCD SCREEN



DUAL
OUTPUT



WIFI
MONITORING



UPDATE
OTA FIRMWARE

FOTON 8.5P


PARAMETERS

Model		FOTON 8.5P
Input	Phase	Single Phase
	Nominal Voltage	220/230/240VAC
	Voltage Range	90~280VAC±3V (Normal Mode) 170~280VAC±3V (UPS Mode)
	Frequency Range	50Hz/60Hz (Adaptive)
Output	Rated Power	6500W
	PV Mode	6500W
	Battery Mode/AC Mode	6200W
	Output Voltage (AC)	220/230/240VAC±5%
	Output Frequency	50/60Hz±0.1%
	Dual Output Rated Power	Main Load: 6200W , Second Load : 6200W
	Waveform	Pure Sine Wave
	Transfer Time (Adjustable)	10ms for Computer , 20ms for Home Appliances
	Peak Power	12400VA
	Overload (Battery Mode)	105%~150% Load: 11s ; 150%~200% Load: 2s ; >200% Load: 400ms
	Peak Efficiency (Battery Mode)	>94%
Grid-tie	Output Voltage	220/230/240VAC
	Feed-in Grid Voltage	175 - 265 VA
	Feed-in Grid Frequency Range	49~51±1Hz/59~61±1Hz
	Rated Feed-in Grid Current	26.9A
	Peak Efficiency (DC/AC)	98%
Battery	Rated Voltage	48 VDC
	Constant Voltage Charging Voltage	56.4VDC (Adjustable)
	Floating Charge Voltage	54VDC (Adjustable)
Charger	PV Charging Method	Single MPPT
	PV Max Input Power	8500W
	MPPT Tracking Range	60~500 VDC
	Best PV Voltage Range	360~430 VDC
	Max PV Input Voltage	500 VDC
	Max PV Input Current	27A
	Max PV Charging Current	120A
	Max AC Charging Current	100A
Communication Port	RS232	For External WiFi device / Monitoring & Update
	RS485	For BMS Communication
	Dry Connect	Support sending signal to start generator
	Parallel Function	Support maximum 9 units
Environmental parameters	Operating environment temperature	-10~50℃
	Operating environment humidity	20%~95% (Non condensing)
	Storage temperature	-15~60℃
	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m
	Noise	≤50db
Certifications		IEC 62109-1, IEC 62109-2, IEC 61683




FOTON

HYBRID SOLAR INVERTER FOTON 13.0

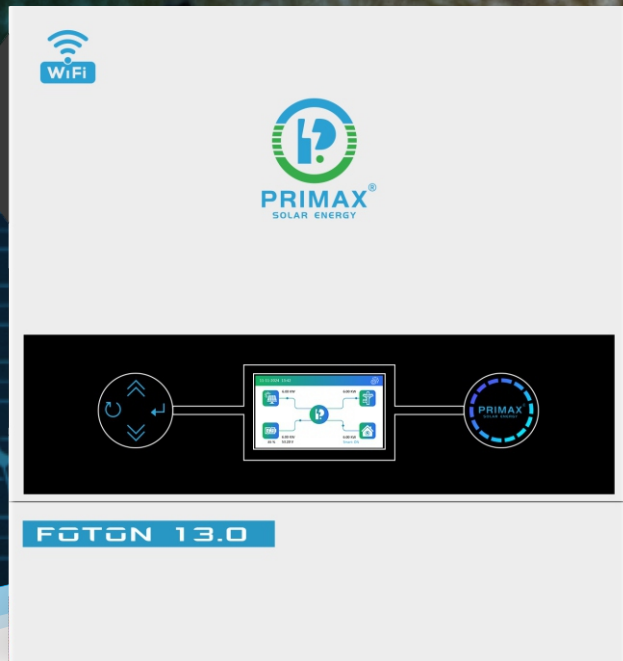

FEATURES

- Enhanced inverter output power under PV mode
- BMS communication , support lithium battery
- Touch LCD screen ,intuitive parameter display, convenient for user operation
- Touch button as an alternative operating method
- Novel and fashionable RGB atmosphere lights indicator
- Dual Output & Dual PV Input
- 13000W high PV input, support more panels
- Support WiFi monitoring & setting
- Working with or without battery

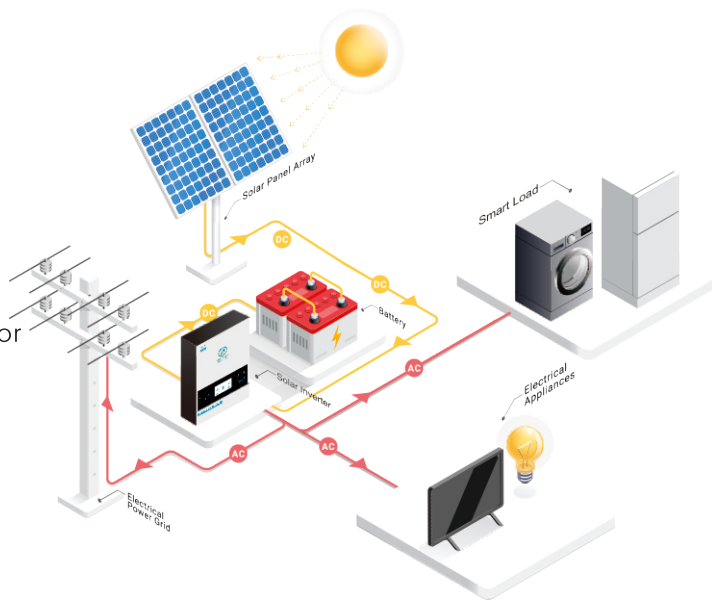

HIGH
PV INPUT



SUPPORT
LITHIUM BATTERY



TOUCH
LCD SCREEN



DUAL
OUTPUT



WIFI
MONITORING



UPDATE
OTA FIRMWARE

FOTON 13.0

PARAMETERS


Model		FOTON 13.0
Input	Phase	Single Phase
	Nominal Voltage	220/230/240VAC
	Voltage Range	90~280VAC±3V (Normal Mode) 170~280VAC±3V (UPS Mode)
	Frequency Range	50Hz/60Hz (Adaptive)
Output	Rated Power	10000W
	PV Mode	10000W
	Battery Mode/AC Mode	8600W
	Output Voltage (AC)	220/230/240VAC±5%
	Output Frequency	50/60Hz±0.1%
	Dual Output Rated Power	Main Load: 8600W , Second Load : 8600W
	Waveform	Pure Sine Wave
	Transfer Time (Adjustable)	10ms for Computer , 20ms for Home Appliances
	Peak Power	17200VA
	Overload (Battery Mode)	105%~150% Load: 11s ; 150%~200% Load: 2s;>200% Load: 400ms
	Peak Efficiency (Battery Mode)	>94%
Grid-tie	Output Voltage	220/230/240VAC
	Feed-in Grid Voltage	175 - 265 VA
	Feed-in Grid Frequency Range	49-51±1Hz/59-61±1Hz
	Rated Feed-in Grid Current	37.4A
	Peak Efficiency (DC/AC)	98%
Battery	Rated Voltage	48 VDC
	Constant Voltage Charging Voltage	56.4VDC (Adjustable)
	Floating Charge Voltage	54VDC (Adjustable)
Charger	PV Charging Method	Dual MPPT
	PV Max Input Power	13000W (6500w+6500w)
	MPPT Tracking Range	90~500 VDC
	Best PV Voltage Range	360~430 VDC
	Max PV Input Voltage	500 VDC
	Max PV Input Current	27A + 27A
	Max PV Charging Current	150A
	Max AC Charging Current	150A
Communication Port	RS232	For External WiFi device / Monitoring & Update
	RS485	For BMS Communication
	Dry Connect	Support sending signal to start generator
	Parallel Function	No
Environmental parameters	Operating environment temperature	-10~50℃
	Operating environment humidity	20%~95% (Non condensing)
	Storage temperature	-15~60℃
	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m
	Noise	≤50db
Certifications		IEC 62109-1, IEC 62109-2, IEC 61683



FOTON


HYBRID SOLAR INVERTER

FOTON 13.0P

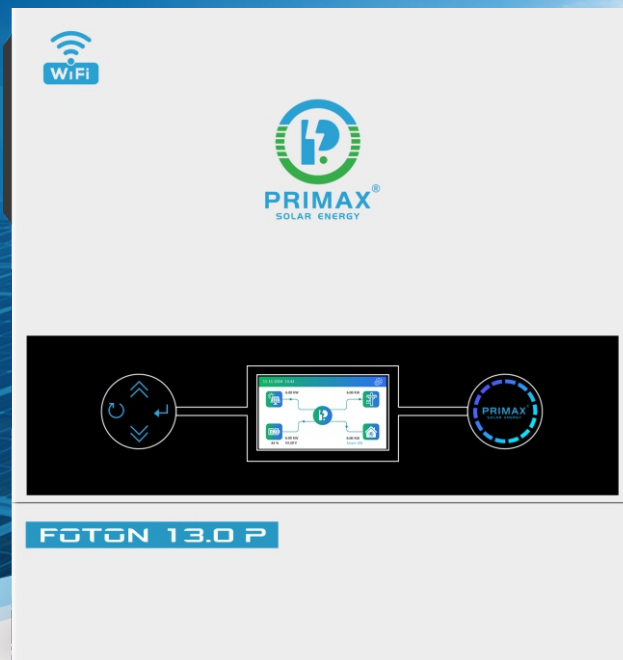

FEATURES

- Support Parallel function, maximum 9 units
- Enhanced inverter output power under PV mode
- BMS communication , support lithium battery
- Touch LCD screen ,intuitive parameter display, convenient for user operation
- Touch button as an alternative operating method
- Novel and fashionable RGB atmosphere lights indicator
- Dual Output & Dual PV Input
- 13000W high PV input, support more panels
- Support WiFi monitoring & setting
- Working with or without battery

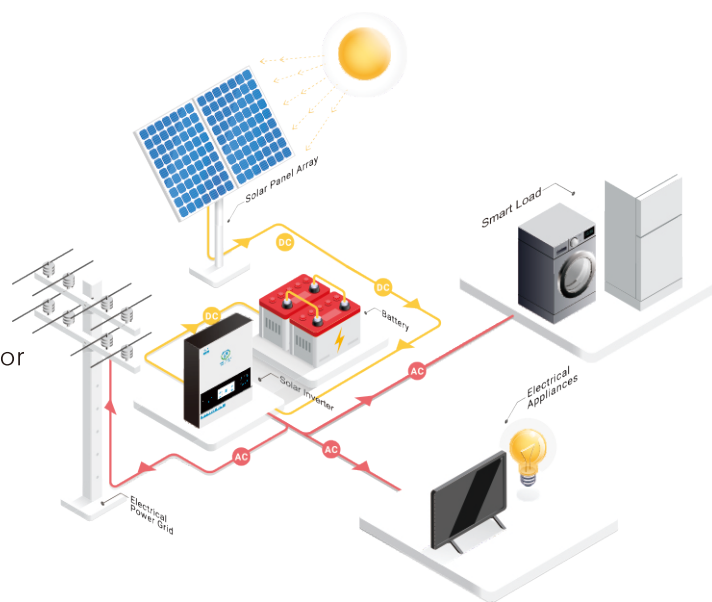

HIGH
PV INPUT

BMS

SUPPORT
LITHIUM BATTERY



TOUCH
LCD SCREEN



DUAL
OUTPUT



WIFI
MONITORING



UPDATE
OTA FIRMWARE

FOTON 13.0 P


— PARAMETERS —

Model		FOTON 13.0 P
Input	Phase	Single Phase
	Nominal Voltage	220/230/240VAC
	Voltage Range	90~280VAC±3V(Normal Mode) 170~280VAC±3V(UPS Mode)
	Frequency Range	50Hz/60Hz(Adaptive)
Output	Rated Power	10000W
	PV Mode	10000W
	Battery Mode/AC Mode	8600W
	Output Voltage(AC)	220/230/240VAC±5%
	Output Frequency	50/60Hz±0.1%
	Dual Output Rated Power	Main Load: 8600W , Second Load : 8600W
	Waveform	Pure Sine Wave
	Transfer Time(Adjustable)	10ms for Computer , 20ms for Home Appliances
	Peak Power	17200VA
	Overload(Battery Mode)	105%~150% Load: 11s ; 150%~200% Load: 2s;>200% Load: 400ms
	Peak Efficiency (Battery Mode)	>94%
Grid-tie	Output Voltage	220/230/240VAC
	Feed-in Grid Voltage	175 - 265 VA
	Feed-in Grid Frequency Range	49~51±1Hz/59~61±1Hz
	Rated Feed-in Grid Current	37.4A
	Peak Efficiency (DC/AC)	98%
Battery	Rated Voltage	48 VDC
	Constant Voltage Charging Voltage	56.4VDC (Adjustable)
	Floating Charge Voltage	54VDC (Adjustable)
Charger	PV Charging Method	Dual MPPT
	PV Max Input Power	13000W (6500w+6500w)
	MPPT Tracking Range	90~500 VDC
	Best PV Voltage Range	360~430 VDC
	Max PV Input Voltage	500 VDC
	Max PV Input Current	27A + 27A
	Max PV Charging Current	150A
	Max AC Charging Current	150A
Communication Port	RS232	For External WiFi device / Monitoring & Update
	RS485	For BMS Communication
	Dry Connect	Support sending signal to start generator
	Parallel Function	Support maximum 9 units
Environmental parameters	Operating environment temperature	-10~50℃
	Operating environment humidity	20%~95%(Non condensing)
	Storage temperature	-15~60℃
	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m
	Noise	≤50db
Certifications		IEC 62109-1, IEC 62109-2, IEC 61683




FOTON

HYBRID SOLAR INVERTER FOTON 15.0

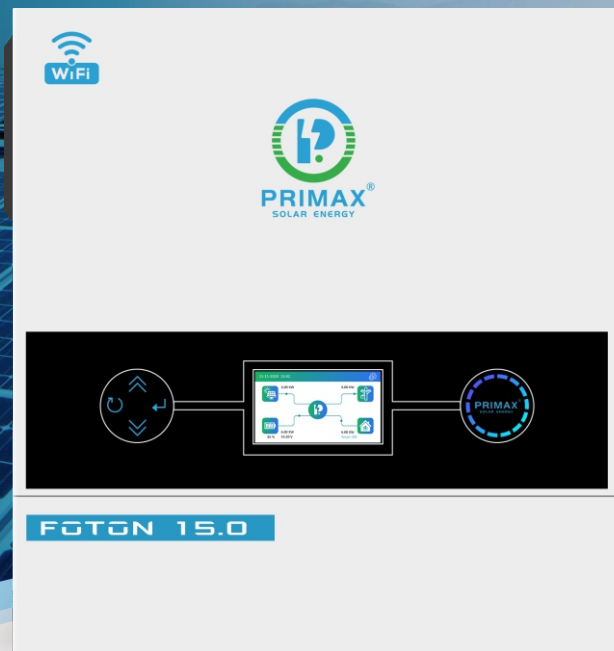

FEATURES

- Enhanced inverter output power under PV mode
- BMS communication , support lithium battery
- Touch LCD screen ,intuitive parameter display, convenient for user operation
- Touch button as an alternative operating method
- Novel and fashionable RGB atmosphere lights indicator
- Dual Output & Dual PV Input
- 15000W high PV input, support more panels
- Support WiFi monitoring & setting
- Working with or without battery

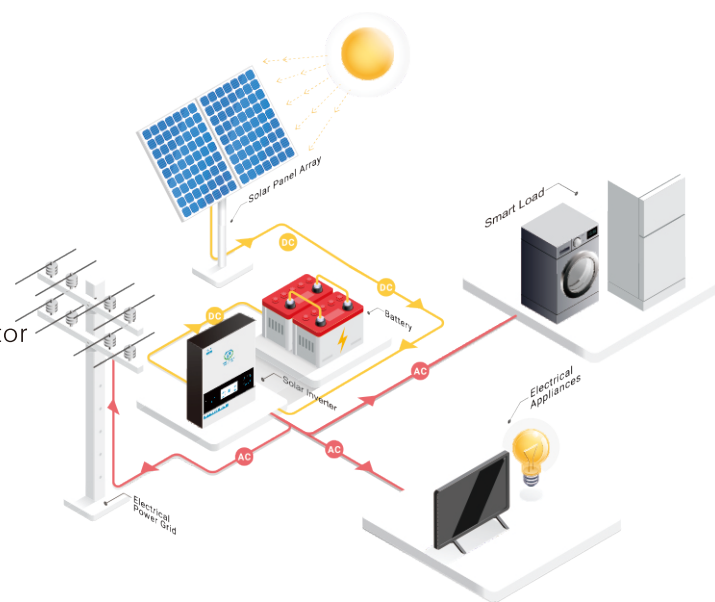

HIGH
PV INPUT

BMS

SUPPORT
LITHIUM BATTERY



TOUCH
LCD SCREEN



DUAL
OUTPUT



WIFI
MONITORING



UPDATE
OTA FIRMWARE

FOTON 15.0


PARAMETERS

Model		FOTON 15.0
Input	Phase	Single Phase
	Nominal Voltage	220/230/240VAC
	Voltage Range	90~280VAC±3V (Normal Mode) 170~280VAC±3V (UPS Mode)
	Frequency Range	50Hz/60Hz (Adaptive)
Output	Rated Power	12000W
	PV Mode	12000W
	Battery Mode/AC Mode	11000W
	Output Voltage (AC)	220/230/240VAC±5%
	Output Frequency	50/60Hz±0.1%
	Dual Output Rated Power	Main Load: 11000W , Second Load : 11000W
	Waveform	Pure Sine Wave
	Transfer Time (Adjustable)	10ms for Computer , 20ms for Home Appliances
	Peak Power	22000VA
	Overload (Battery Mode)	105%~150% Load: 11s ; 150%~200% Load: 2s; >200% Load: 400ms
	Peak Efficiency (Battery Mode)	>94%
Grid-tie	Output Voltage	220/230/240VAC
	Feed-in Grid Voltage	175 - 265 VA
	Feed-in Grid Frequency Range	49-51±1Hz/59-61±1Hz
	Rated Feed-in Grid Current	47.8A
	Peak Efficiency (DC/AC)	98%
Battery	Rated Voltage	48 VDC
	Constant Voltage Charging Voltage	56.4VDC (Adjustable)
	Floating Charge Voltage	54VDC (Adjustable)
Charger	PV Charging Method	Dual MPPT
	PV Max Input Power	15000W (7500w+7500w)
	MPPT Tracking Range	90~500 VDC
	Best PV Voltage Range	360~430 VDC
	Max PV Input Voltage	500 VDC
	Max PV Input Current	27A + 27A
	Max PV Charging Current	150A
	Max AC Charging Current	150A
Communication Port	RS232	For External WiFi device / Monitoring & Update
	RS485	For BMS Communication
	Dry Connect	Support sending signal to start generator
	Parallel Function	No
Environmental parameters	Operating environment temperature	-10~50℃
	Operating environment humidity	20%~95% (Non condensing)
	Storage temperature	-15~60℃
	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m
	Noise	≤50db
Certifications		IEC 62109-1, IEC 62109-2, IEC 61683




FOTON

HYBRID SOLAR INVERTER FOTON 15.0P

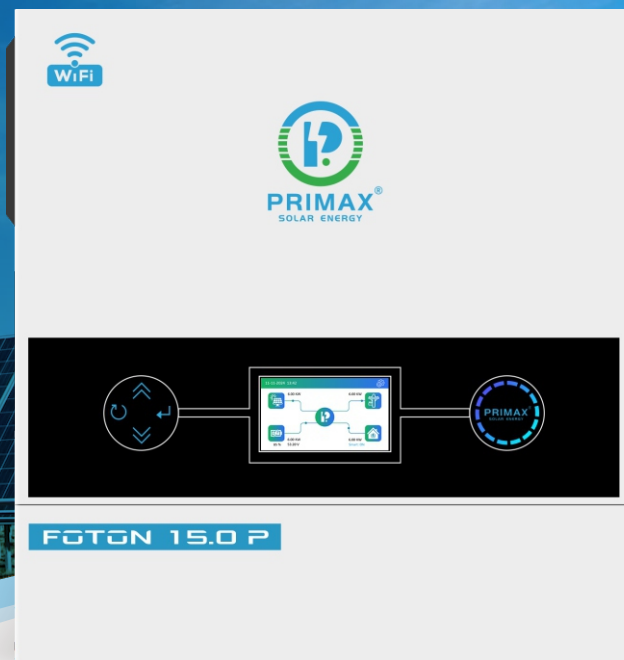

FEATURES

- Support Parallel function , maximum 9 units
- Enhanced inverter output power under PV mode
- BMS communication , support lithium battery
- Touch LCD screen ,intuitive parameter display, convenient for user operation
- Touch button as an alternative operating method
- Novel and fashionable RGB atmosphere lights indicator
- Dual Output & Dual PV Input
- 15000W high PV input, support more panels
- Support WiFi monitoring & setting
- Working with or without battery

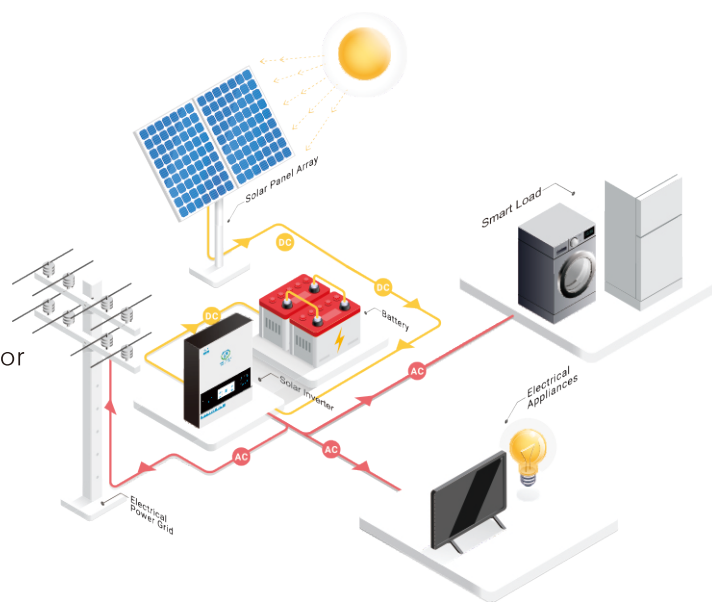

HIGH
PV INPUT

BMS

SUPPORT
LITHIUM BATTERY



TOUCH
LCD SCREEN



DUAL
OUTPUT



WIFI
MONITORING



UPDATE
OTA FIRMWARE

FOTON 15.0 P

— PARAMETERS —

Model		FOTON 15.0 P
Input	Phase	Single Phase
	Nominal Voltage	220/230/240VAC
	Voltage Range	90~280VAC±3V (Normal Mode) 170~280VAC±3V (UPS Mode)
	Frequency Range	50Hz/60Hz (Adaptive)
Output	Rated Power	12000W
	PV Mode	12000W
	Battery Mode/AC Mode	11000W
	Output Voltage (AC)	220/230/240VAC±5%
	Output Frequency	50/60Hz±0.1%
	Dual Output Rated Power	Main Load: 11000W , Second Load : 11000W
	Waveform	Pure Sine Wave
	Transfer Time (Adjustable)	10ms for Computer , 20ms for Home Appliances
	Peak Power	22000VA
	Overload (Battery Mode)	105%~150% Load: 11s ; 150%~200% Load: 2s; >200% Load: 400ms
	Peak Efficiency (Battery Mode)	>94%
Grid-tie	Output Voltage	220/230/240VAC
	Feed-in Grid Voltage	175 - 265 VA
	Feed-in Grid Frequency Range	49-51±1Hz/59-61±1Hz
	Rated Feed-in Grid Current	47.8A
	Peak Efficiency (DC/AC)	98%
Battery	Rated Voltage	48 VDC
	Constant Voltage Charging Voltage	56.4VDC (Adjustable)
	Floating Charge Voltage	54VDC (Adjustable)
Charger	PV Charging Method	Dual MPPT
	PV Max Input Power	15000W (7500w+7500w)
	MPPT Tracking Range	90~500 VDC
	Best PV Voltage Range	360~430 VDC
	Max PV Input Voltage	500 VDC
	Max PV Input Current	27A + 27A
	Max PV Charging Current	150A
	Max AC Charging Current	150A
Communication Port	RS232	For External WiFi device / Monitoring & Update
	RS485	For BMS Communication
	Dry Connect	Support sending signal to start generator
	Parallel Function	Support maximum 9 units
Environmental parameters	Operating environment temperature	-10~50℃
	Operating environment humidity	20%~95% (Non condensing)
	Storage temperature	-15~60℃
	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m
	Noise	≤50db
Certifications		IEC 62109-1, IEC 62109-2, IEC 61683