


# 1000BASE-ZX SFP 1550nm 80km

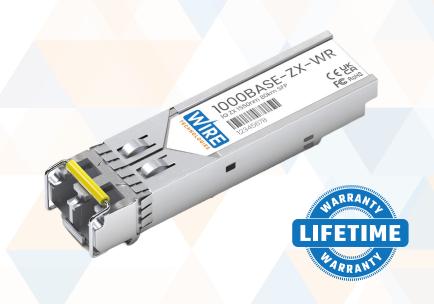

#### **Popular Compatibility Options**

**Part Code** 

Wire 1000BASE-ZX-WR
Cisco GLC-ZX-SMD
Juniper EX-SFP-1GE-LH
Juniper QFX-SFP-1GE-LH
Juniper SRX-SFP-1GE-LH
Mellanox MC3208011-ZX
Brocade E1MG-LHA

H3C SFP-GE-LH70-SM1550

Dell 430-4586
Extreme I-MGBIC-GZX
Arista SFP-1G-EX-80
HPe JD063B-WR
75+ other vendors available

# >1000BASE - ZX Specifications

Form Factor: **SFP** Data Rate: 1.25Gbs Tx/Rx Wavelength: 1550nm Compatible with: See table Reach: 80km Cable Type: **SMF** SFP **Interface Type:** DDM/DOM: Yes

Connector Type: Duplex-LC Power Budget: 3~-2dBm Temperature Range: 0-70°C

Warranty: Lifetime - See

**Warranty Document** 

### >1000BASE - ZX Features

Vendor

- Hot pluggable
- Protocol- SFF-8472 IEEE 802.3AH-2004
- RoHs-6 compliant
- Built-in digital diagnostic function
- Compliant with OEM vendor multi-source agreement

# >Testing

- Compatibility Tested
- Performance Tested
- 100% Testing of all Transceiver

# >Description

This 1000BASE-ZX compatible SFP transceiver provides 1G-ZX throughput up to 80km over Single-Mode Fibre (SMF) using a wavelength of 1550nm via an LC connector. It is guaranteed to be 100% compatible with the host device.

Digital Optical Monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a lifetime warranty.