


40G QSFP+ to 4x10G SFP+ Passive Twinax

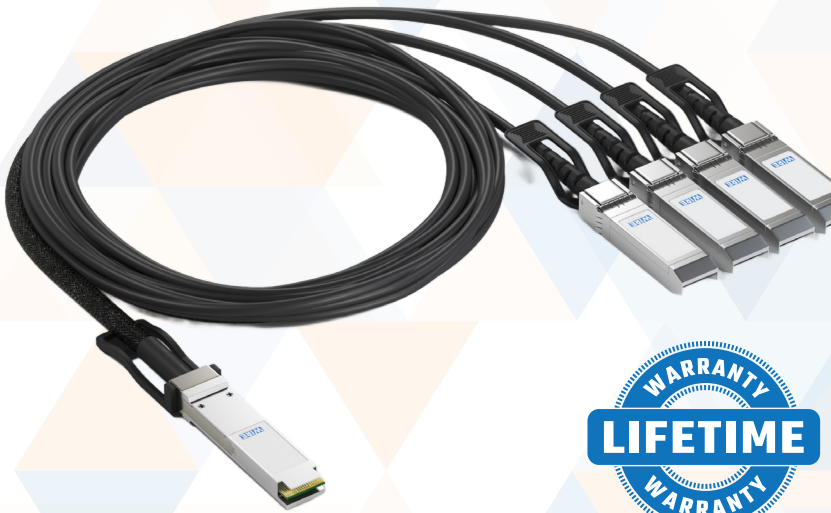

Popular Compatibility Options

Vendor	Part Code
Wire	100G-DAC-xM-WR
Cisco	QSFP-4SFP25G-CUxM-WR
Juniper	QFX-QSFP-DACBO-xM-WR
Juniper	JNP-QSFP-DACBO-xM-WR
Arista	CAB-Q-S-xM-WR
Brocade	40G-QSFP-4SFP-C-0xx-WR
Dell	470-AAVO-xM-WR
HPe Aruba	DAC-40G-4X10G-xM-ARN-WR

75+ other vendors available

>40G QSFP+ to 4x10G SFP+ DAC Spec

Form Factor:	QSFP+ to 4xSFP+
Data Rate:	40Gbs to 4x10G
Compatible with:	See table
Wire AWG:	30AWG
Interface Type:	QSFP+ to 4xSFP+
DDM/DOM:	Yes
Minimum Bend Radius:	21mm
Power Supply:	3.3V
Temperature Range:	0-70°C
Jacket Material:	LSZH
Warranty:	Lifetime - See Warranty Document

>40G QSFP+ to 4x10G SFP+ DAC Feature

- Supports upto 40 Gb/s bit rates
- Built-in Digital Diagnostic Function
- Passive Copper Twinax Cable
- RoHs-6 compliant
- Built-in digital diagnostic function

>Testing

- Compatibility Tested
- Performance Tested
- 100% Testing of all Transceiver

>Description

This is a multi-vendor compatible 40GBase-CU QSFP+ to 4x10G SFP+ Direct attach cable that operates over passive copper with a maximum reach of 5.0m. It has been programmed, uniquely serialized, data-traffic and application tested to ensure it is 100% compliant and functional. It is guaranteed to be compatible with the OEM host switch, router or network interface card (NIC). This Direct Attach Cable is built to comply with MSA (Multi-Source Agreement) standard. Digital Optical Monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a lifetime warranty.