



Report Number: 0133  
Issued: 03/2010  
Revised: 04/04/2014  
Valid Through: 03/2015

**DIVISION: 06 Wood and Plastics**  
**Section: 06090 Wood and Plastic Fastening**

**REPORT HOLDER:**

**UNIVERSAL FASTENER OUTSOURCING, LLC**  
**14652 DIRECTOR RD,**  
**WEST FORK, ARKANSAS 72774**  
**(800) 352-0028 or (479) 443-9292**  
www.911-nails.com info@911-nails.com

**EVALUATION SUBJECT:**

**UFO BALLISTIC**  
**NAILSCREW®/PNEUSCREW®**

**U.S. Patent Application No.: 12/807,500**  
**Canadian Patent: 2,648,647**

**1.0 EVALUATION SCOPE**

**1.1 Compliance with the following codes**

- 2006 International Building Code® (IBC)
- 2006 International Residential Code® (IRC)

**1.2 Evaluated in accordance with**

- ICC AC120 approved February 2006

**1.3 Property Evaluated**

- Structural

**2.0 USES**

UFO Ballistic NailScrews®/PneuScrews® are used as a substitution for nails in horizontal and vertical wood diaphragms (shear walls). NailScrew®/PneuScrew® substitution in vertical diaphragm applications resisting seismic loads are outside the scope of this report.

**3.0 DESCRIPTION**

The UFO Ballistic NailScrews®/PneuScrews® are nominally 2-1/4 inches (57.5 mm), 2-1/2 inches (63.5 mm), and 3 inches (76.2 mm) in length and have a 0.270 inch to 0.275 inch (6.86 to 6.98 mm) diameter full round head. The shank has three distinctly identifiable sections. The first shank

section is smooth, round, measures 1/2 inch (12.7 mm) in length for the 2-1/4 and 2-1/2 inch sizes and 5/8 inch (15.9 mm) for the 3 inch size from the head to midsection, and has a nominal diameter of 0.113 inch (2.9 mm). The second section measures 1-1/4 inches (31.8 mm), 1-1/2 inches (38.1 mm), or 1-7/8 inches (47.6 mm) in length for the three sizes respectively from the smooth round shank to the tip and is composed of deformed screw threads. The major diameter of the screw threads is 0.125 inch (3.1 mm) and the minor diameter is nominally 0.113 inch (2.8702 mm). The third section of the shank is the Ballistic point. Figure 1 illustrates a typical fastener.

The proprietary head and shank geometries of the UFO Ballistic NailScrew®/PneuScrew® comply with the material requirements, physical properties, dimensional tolerances, workmanship, protective coating and finishes, and packaging requirements of ASTM F1667. The UFO Ballistic NailScrews®/PneuScrews® are manufactured from cold heading quality (CHQ) carbon steel wire rod grades 1018-1022 steel wire. They are heat treated and case hardened. The UFO Ballistic NailScrews®/PneuScrews® have minimum bending yield strength,  $F_{yb}$ , of 100,000 psi (689.476 MPa).

**4.0 DESIGN AND INSTALLATION**

**4.1 Design**

**4.1.1 Horizontal Diaphragms:** Any of the Ballistic NailScrews®/PneuScrews® described in Section 3.0 of this report are permitted to be substituted for the same nailing patterns as 8d common nails (2-1/2 x 0.131 inch [65x3.2 mm]) in 7/16 inch (11.1 mm) and 15/32 inch (11.9 mm) thick oriented strand board (OSB) horizontal diaphragms resisting wind or seismic loads referenced IBC 2006 Table 2306.3.1 and IRC 2006 Table R602.3 (1).

**4.1.2 Vertical Diaphragms:** Any of the above listed Ballistic NailScrews®/PneuScrews® are permitted to be substituted for the same nailing patterns as 8d common nails (2-1/2 x 0.131 inch [65x3.2 mm]) in 7/16 inch (11.1 mm) and 15/32 inch (11.9 mm) thick OSB vertical diaphragms resisting wind loads only referenced IBC 2006 Table 2306.4.1 and IRC 2006 Table R602.3 (1).

Report Number: 0133  
Issued: 03/2010  
Revised: 04/04/2014  
Valid Through: 03/2015

## 4.2 Installation

UFO Ballistic NailScrews<sup>®</sup>/PneuScrews<sup>®</sup> shall be installed in accordance with current manufactured published installation instructions, this report, and applicable requirements in the NDS, Section 11.1.5. Where conflicts occur, the more restrictive shall govern. The UFO Ballistic NailScrews<sup>®</sup>/PneuScrews<sup>®</sup> are either pneumatically driven or manually screwed in.

## 5.0 CONDITIONS OF USE

5.1 Use of NailScrews<sup>®</sup>/PneuScrews<sup>®</sup> shall comply with this report and the applicable code.

5.2 Diaphragm construction shall conform to applicable provisions in the IBC and IRC.

5.3 The fasteners shall be driven flush with the face of the sheathing material.

5.4 NailScrews<sup>®</sup>/PneuScrews<sup>®</sup> cannot replace nails in end conditions (i.e. driven parallel to grain in end of main member). This condition does not affect diaphragm/shear wall in typical construction.

5.5 The NailScrews<sup>®</sup>/PneuScrews<sup>®</sup> shall be installed with a minimum edge and end distance of 3/8 inch (9.5 mm).

5.6 Where installation creates splitting of the wood prefabricated-drilling holes are required in accordance with the code for wood-screw installation.

5.7 The wood structural panel grade is permitted to be any of the following: OSB Structural I grades; sheathing, single floor and other grades covered in DOC PS 1 and PS2. Use with plywood panels is outside the scope of this report


5.8 This evaluation report does not address fastener corrosion when the fastener is installed in chemically treated wood.

## 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Wood Screws Used in Horizontal Diaphragms and Vertical Shear Walls (AC120), approved February 2006.

## 7.0 IDENTIFICATION

The screws are packaged in cartons bearing labels that provide the manufacturer name (UFO Ballistic NailScrew<sup>®</sup>/PneuScrew<sup>®</sup>); a description; (type, length, & shank diameter); IAPMO UES Mark of Conformity and the Evaluation Report Number (UER-0133).

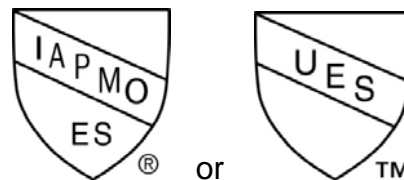

### IAPMO UER #0133



**Brian Gerber, P.E., S.E.**

**Technical Director of Uniform Evaluation Service**



**Richard Beck, PE, CBO, MCP  
Director of Uniform Evaluation Service**



**GP Russ Chaney  
CEO, The IAPMO Group**

# EVALUATION REPORT



Report Number: 0133  
 Issued: 03/2010  
 Revised: 04/04/2014  
 Valid Through: 03/2015

**Figure 1:**



**Figure 2:**

UFO Part #	Description	Collation	Drive	Packed
HDNS212113YZPH	2 ½" X .113" Yellow Zinc	20 Deg. Plastic Strip	#2 Phillips	1.5M/Case
HDNS212113YZSP4	2 ½" X .113" Yellow Zinc	20 Deg. Plastic Strip	#1 SQ & #2 Phillips	4-1M Bx. (4M/Case)
HDNS214113YZPH	2 ¼" X .113" Yellow Zinc	20 Deg. Plastic Strip	#2 Phillips	1.5M/Case
HDNS214113YZPH4	2 ¼" X .113" Yellow Zinc	20 Deg. Plastic Strip	#2 Phillips	4-1M Bx. (4M/Case)
HDNS214113YZSP4	2 ¼" X .113" Yellow Zinc	20 Deg. Plastic Strip	#1 SQ & #2 Phillips	4-1M Bx. (4M/Case)
HDNS214113YZSQ	2 ¼" X .113" Yellow Zinc	20 Deg. Plastic Strip	#2 Square	1.5M/Case
HDNS214113YZSQ4	2 ¼" X .113" Yellow Zinc	20 Deg. Plastic Strip	#2 Square	4-1M Bx. (4M/Case)
HDNS300113YZPH	3" X .113" Yellow Zinc	20 Deg. Plastic Strip	#2 Phillips	1M/Case
PSNS214113YZSP4	2 ¼" X .113" Yellow Zinc	34 Deg. Plastic Strip	#1 SQ & #2 Phillips	4-1M Bx. (4M/Case)
PSNS214113YZSQ4	2 ¼" X .113" Yellow Zinc	34 Deg. Plastic Strip	#2 Square	4-1M Bx. (4M/Case)
PSNS300113YZPH4	3" X .113" Yellow Zinc	34 Deg. Plastic Strip	#2 Phillips	4-1M Bx. (4M/Case)
PSNS300113YZSP4	3" X .113" Yellow Zinc	34 Deg. Plastic Strip	#2 SQ & #2 Phillips	4-1M Bx. (4M/Case)
PTHDNS212113PH	2 ½" X .113" PT2000®EG	20 Deg. Plastic Strip	#2 Phillips	1M/Case
PTHDNS212113SP4	2 ½" X .113" PT2000®EG	20 Deg. Plastic Strip	#1 SQ & #2 Phillips	4-1M Bx. (4M/Case)
PTHDNS212113SQ	2 ½" X .113" PT2000®EG	20 Deg. Plastic Strip	#2 Square	1M/Case
PTHDNS300113PH	3" X .113" PT2000®EG	20 Deg. Plastic Strip	#2 Phillips	1M/Case
PTHDNS300113SP4	3" X .113" PT2000®EG	20 Deg. Plastic Strip	#2 SQ & #2 Phillips	4-1M Bx. (4M/Case)
PTHDNS300113SQ	3" X .113" PT2000®EG	20 Deg. Plastic Strip	#2 Square	1M/Case
PTPSNS212113SP4	2 ¼" X .113" PT2000®EG	34 Deg. Plastic Strip	#1 SQ & #2 Phillips	4-1M Bx. (4M/Case)
PTPSNS300113SP4	3" X .113" PT2000®EG	34 Deg. Plastic Strip	#2 SQ & #2 Phillips	4-1M Bx. (4M/Case)
PTWCNS212113SP	2 ½" X .113" PT2000®EG	15 Deg. Wire Coil	#1 SQ & #2 Phillips	.8M/case
PTWCNS212113SQ	2 ½" X .113" PT2000®EG	15 Deg. Wire Coil	#2 Square	.8M/case
PTWCNS300113SP	3" X .113" PT2000®EG	15 Deg. Wire Coil	#2 SQ & #2 Phillips	.8M/case
PTWCNS300113SQ	3" X .113" PT2000®EG	15 Deg. Wire Coil	#2 Square	.8M/case
WCNS212113YZPH	2 ½" X .113" Yellow Zinc	15 Deg. Wire Coil	#2 Phillips	3.6M
WCNS212113YZSP	2 ½" X .113" Yellow Zinc	15 Deg. Wire Coil	#1 SQ & #2 Phillips	3.6M
WCNS212113YZSQ	2 ½" X .113" Yellow Zinc	15 Deg. Wire Coil	#2 Square	3.6M
WCNS212113YZSQH	2 ½" X .113" Yellow Zinc	15 Deg. Wire Coil	#2 Square	3.6M 900 count coils
WCNS214113YZPH	2 ¼" X .113" Yellow Zinc	15 Deg. Wire Coil	#2 Phillips	3.6M
WCNS214113YZSP	2 ¼" X .113" Yellow Zinc	15 Deg. Wire Coil	#1 SQ & #2 Phillips	3.6M
WCNS214113YZSQ	2 ¼" X .113" Yellow Zinc	15 Deg. Wire Coil	#2 Square	3.6M
WCNS214113YZSQH	2 ¼" X .113" Yellow Zinc	15 Deg. Wire Coil	#2 Square	3.6M 900 count coils
WCNS300113YZSP	3" X .113" Yellow Zinc	15 Deg. Wire Coil	#2 SQ & #2 Phillips	3.6M