


F18 SB



Versions

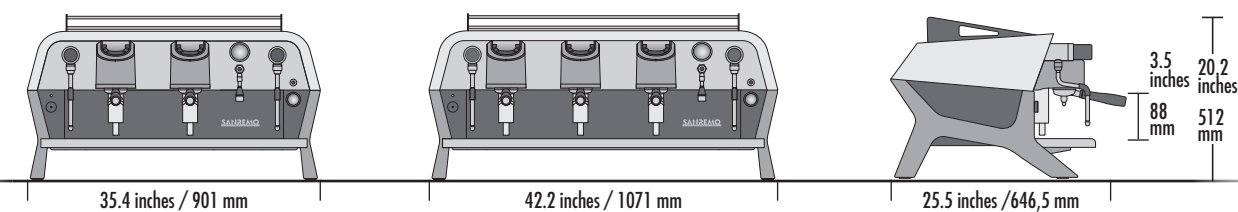


2 group

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

3 group

- 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters

TALL VERSION

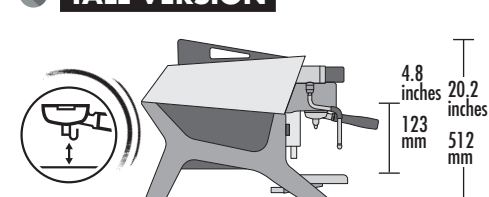

STANDARD VERSION



TALL VERSION



Technical data		2 group	3 group
voltage	V	220-240 1N 50/60Hz	380-415 3N 50/60Hz
max total absorbed power/stream boiler heating element	kW	3.1 / 2.7	5.6 / 5.1
	kW	4.4 / 4.0	6.5 / 6.0
steam boiler capacity	lt	11.9	18.3
pump power	kW	0.15	0.15
cup-warmer power	kW	0.20	0.25
net weight	kg	90	103

Colors

	Matte black Black	RAL 9004
	Matte black White	RAL 9004 9003
	Matte black Brown	RAL 9004 8019
	Matte black Rosso corsa	RAL 9004

Characteristics

- PRESSURE GAUGE**
Allows to monitor the inlet and pump pressure during extraction.
- ELECTRONIC AUTO-LEVEL**
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.
- STATIC RELAY BOILER TEMPERATURE**
Allows to regulate the temperature as accurately as possible thanks to the PID algorithm.
- ALUMINIUM DIE-CAST LEGS**

- MULTIFUNCTION DISPLAY**
Allows to monitor the right functioning of the machine and to program the main functions.
- PROGRAMMABLE ELECTRONIC PRE-INFUSION**
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.
- HIGH PERFORMANCE VOLUMETRIC PUMP**
Pressure stability also with prolonged and contemporary use of more than one group.
- GROUP FLUSHING**
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

- CUP WARMER**
Dedicated resistor to keep all the cups at the optimal temperature. Power level programmable by user.
- MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS**
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.
- AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION**
Programmable on-off timer for each day and/or daily timetables.

GROUP SR 61

Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature



ENERGY SAVING SYSTEM

Insulation and smart energy management to save up to 15% of energy




ALUMINIUM DIE-CAST LEGS

Machine support made in die-cast aluminium

SANREMO


COFFEEMACHINES

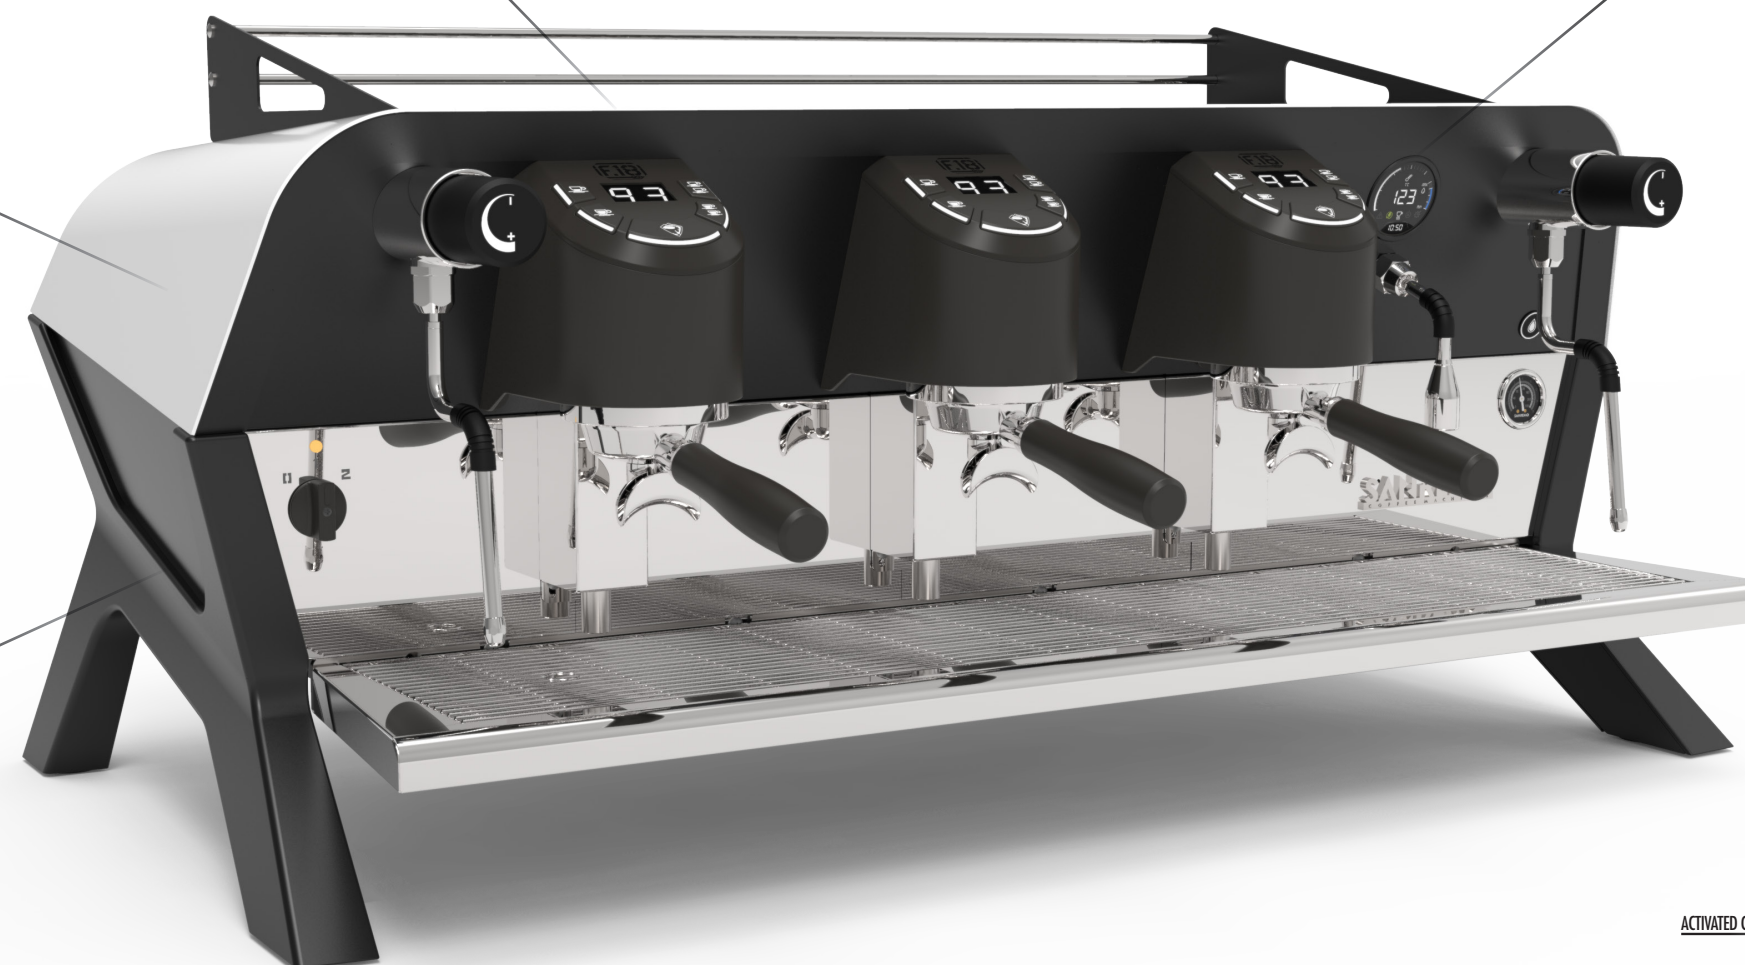

F18 SB
Link to the website

MULTIFUNCTION DISPLAY

ECO MODE

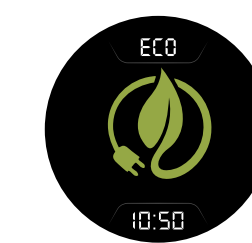


STAND BY MODE - PRESSURE



STAND BY MODE - TEMPERATURE



FUNCTIONS

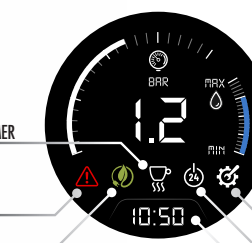

ACTIVATED CUP WARMER

DETECTED ALARM

ACTIVATED ECO MODE

REQUIRED SERVICE

ACTIVATED AUTOMATIC ON/OFF

CLOCK

Turbo Steam


- FOAMING
- STEAMING
- AUTOMATIC CLEANING
- HOT WATER



Turbo Steam Version




Standard Steam Version

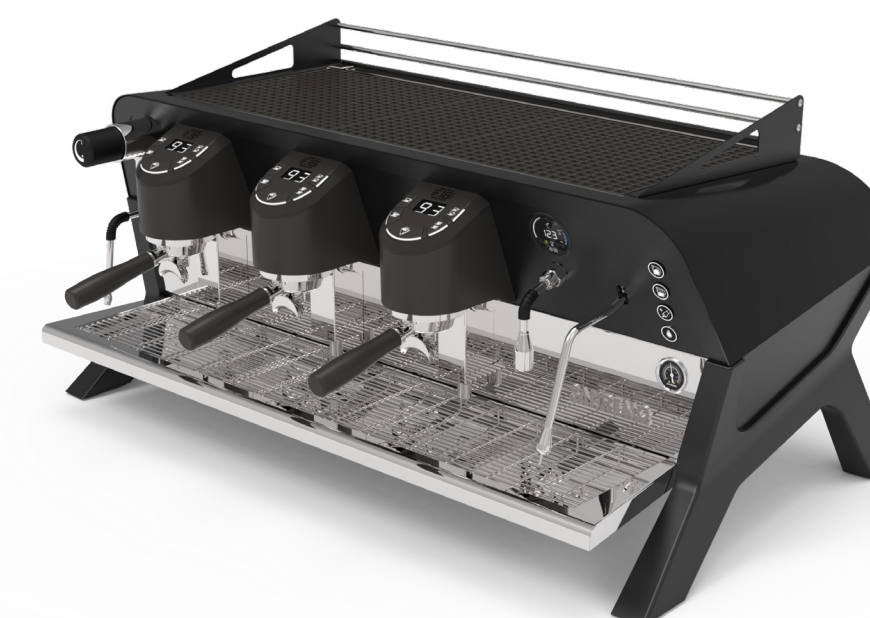

Control panel

4 o 6 PROGRAMMABLE DOSES

Keyboard 5 selections

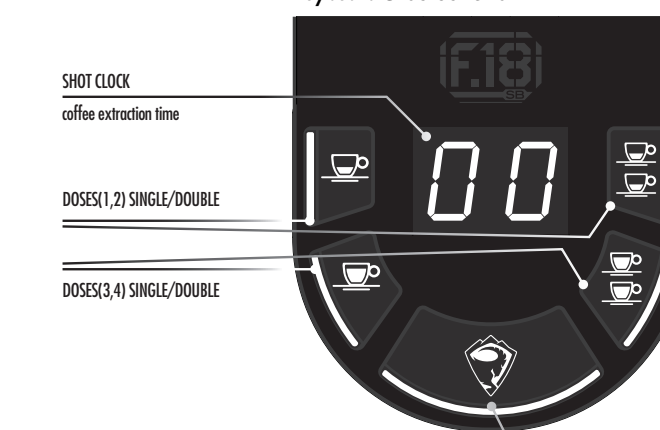


SHOT CLOCK

coffee extraction time

DOSES (1,2) SINGLE/DOUBLE

DOSES (3,4) SINGLE/DOUBLE

Keyboard 7 selections

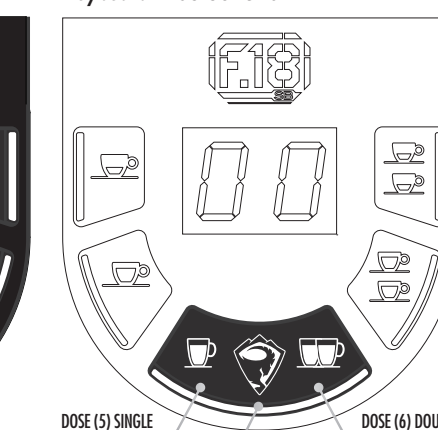

DOSE (5) SINGLE

DOSE (6) DOUBLE

CONTINUOUS DELIVERY / GROUP FLUSHING



F18 SB



For more information about our coffee machines please contact us at export@sanremomachines.com



SANREMO
COFFEEMACHINES

SANREMO coffee machines s.r.l.
Via Giacomo Bartolan 52
31050 Vascon di Carbonera (TV) – ITALY
T +39 0422 448900
F +39 0422 448935
www.sanremomachines.com

Sanremo Coffee Machines s.r.l. has a certified Quality Management System according to UNI EN ISO 9001:2015 standard.



SANREMO
COFFEEMACHINES
made in italy