






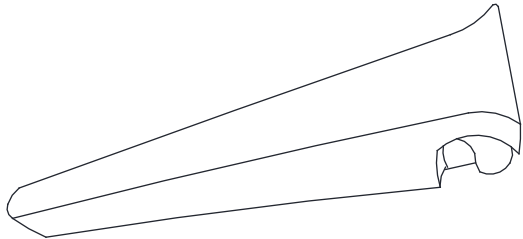
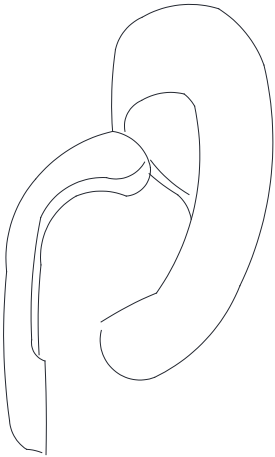
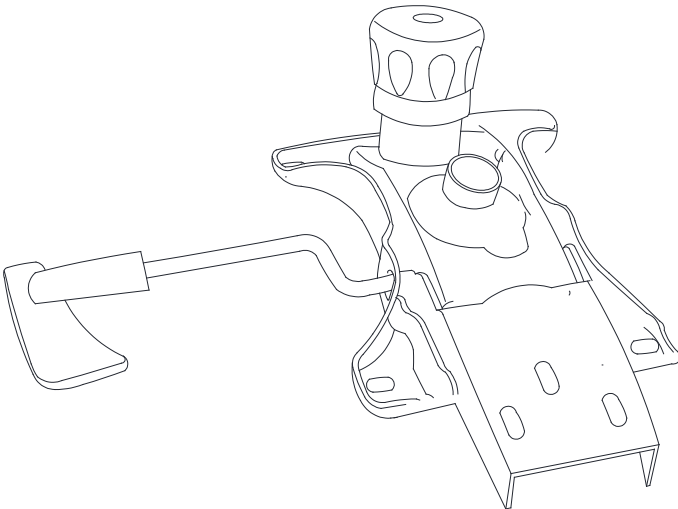


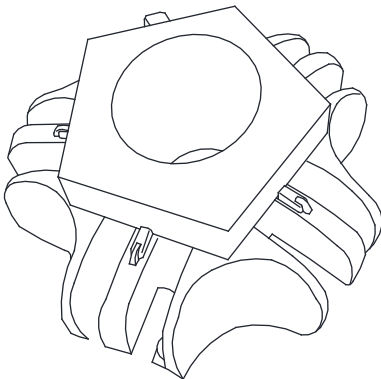






ASSEMBLY INSTRUCTIONS

Our packing box doubles as an assembly workbench




WARM TIPS: ASSEMBLY IS RECOMMENDED TO BE CARRIED OUT BY TWO PEOPLE.

PARTS LIST
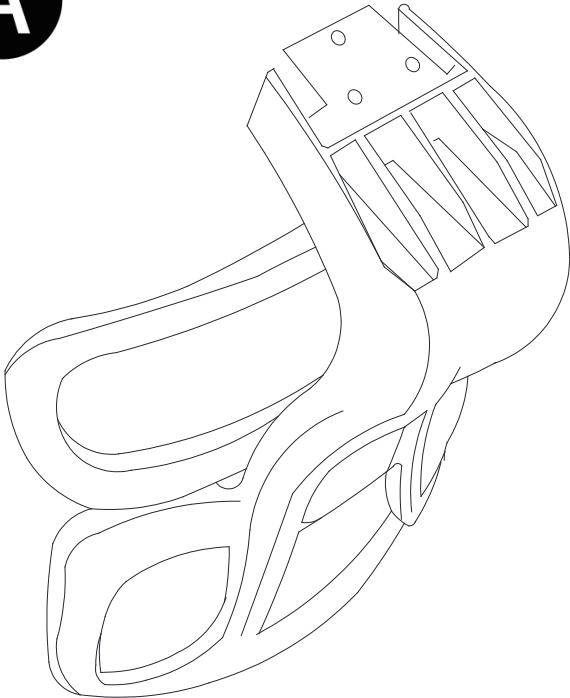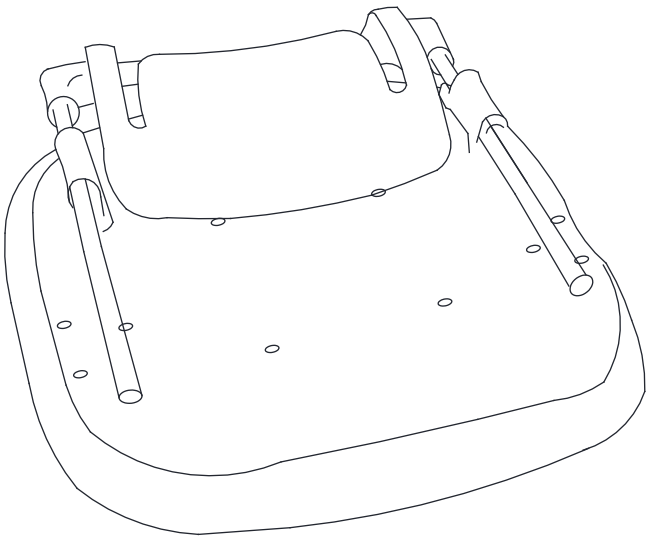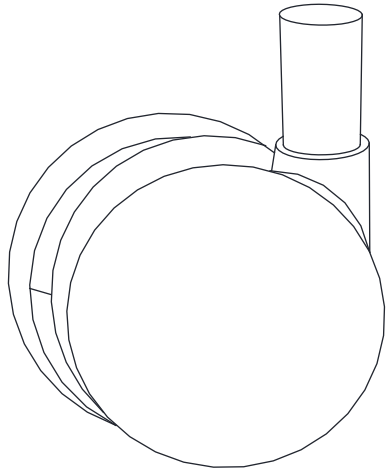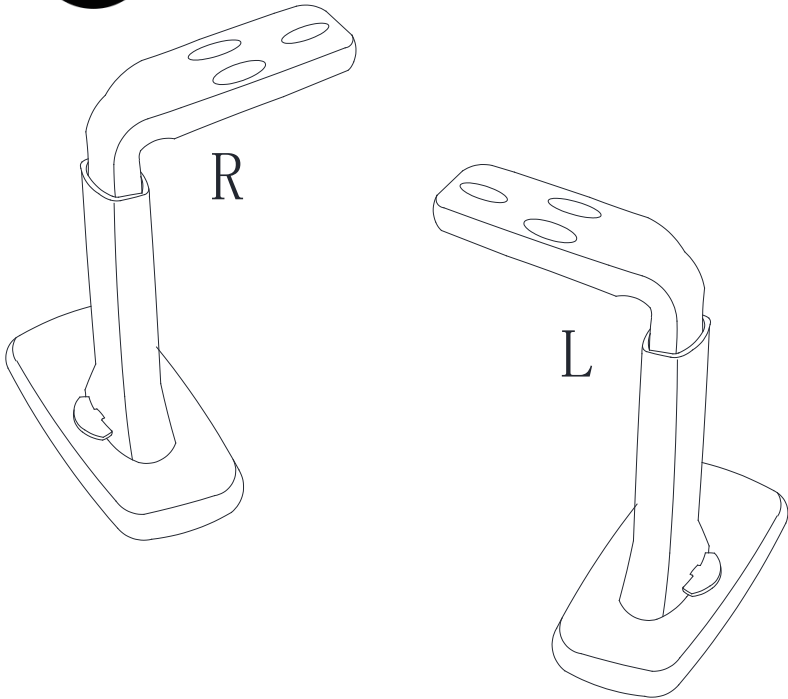
<div>A</div> <div></div> <div>Backrest*1pc</div>	<div>B</div> <div></div> <div>Seat*1pc</div>	<div>C</div> <div></div> <div>Wheel*5pcs</div>
<div>D</div> <div></div> <div>Armrest*2pcs</div>	<div>E</div> <div></div> <div>Gas lift *1pc</div>	<div>F</div> <div></div> <div>Base leg*5pcs</div>
<div>G</div> <div></div> <div>Headrests*1pc</div>	<div>N</div> <div></div> <div>Mechanical*1pc</div>	<div>O</div> <div></div> <div>Hanger*1pc</div>
<div>L</div> <div></div> <div>Decorative part *1pc</div>	<div>P</div> <div></div> <div>Chair Base *1pc</div>	<div>H I J K M Q</div> <div> H:2PCS M6X30 Screws</div> <div> I:2PCS M6X40 Screws</div> <div> J:3PCS M8X40 Screws</div> <div> K:4PCS M6X20 Screws</div> <div> Q:4PCS M6X35 Screws</div> <div> M:Wrench *1pc</div> <div>Tips: other screws are spare screws</div>


*Any problems such as damaged during shipment, missing screws or installation problems, please contact us via email Warehouse@jddtech.net

1

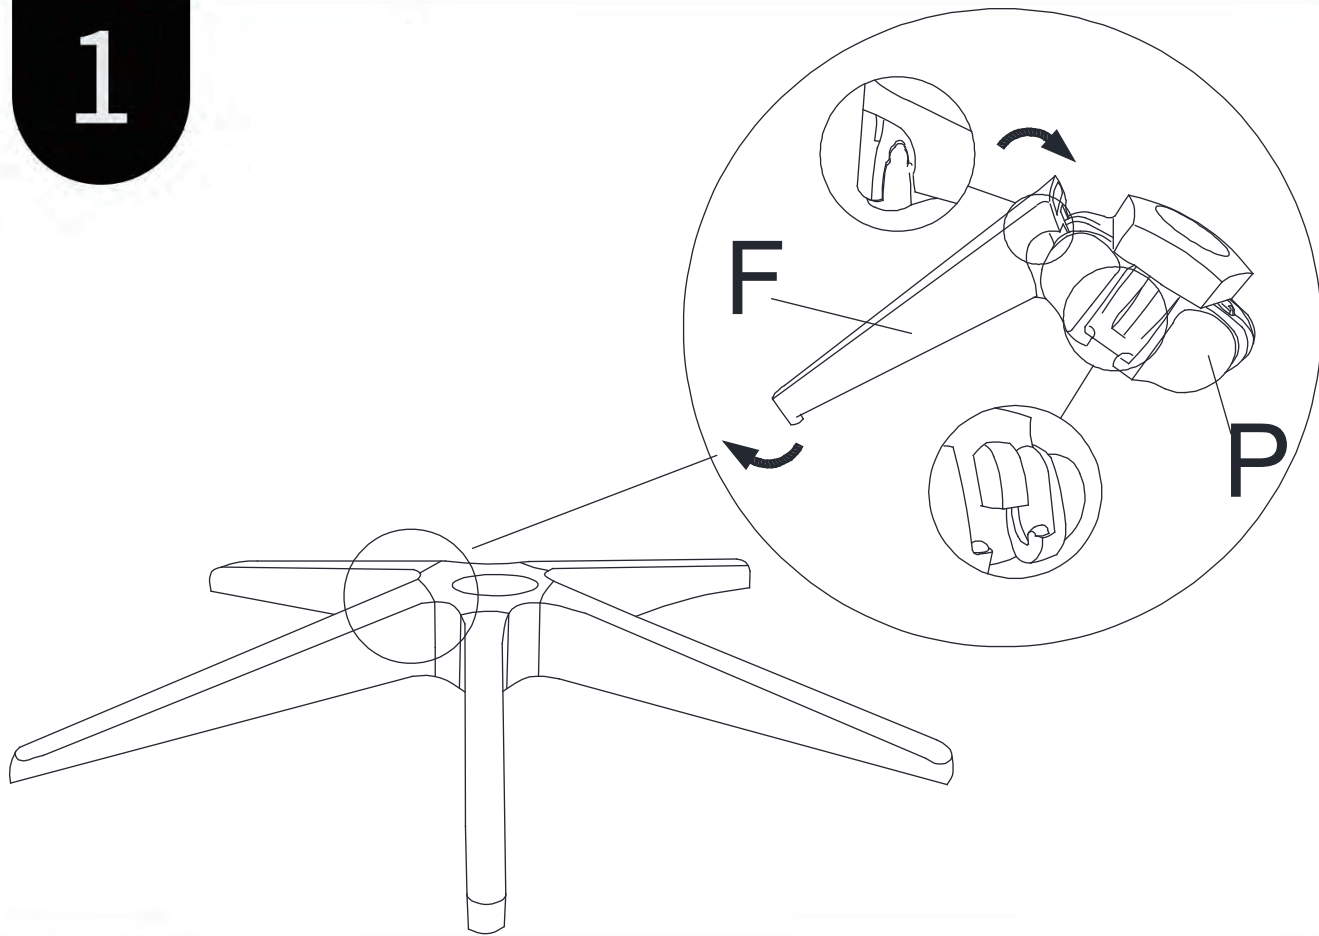


Attach base legs(F)to chair base(P)

2

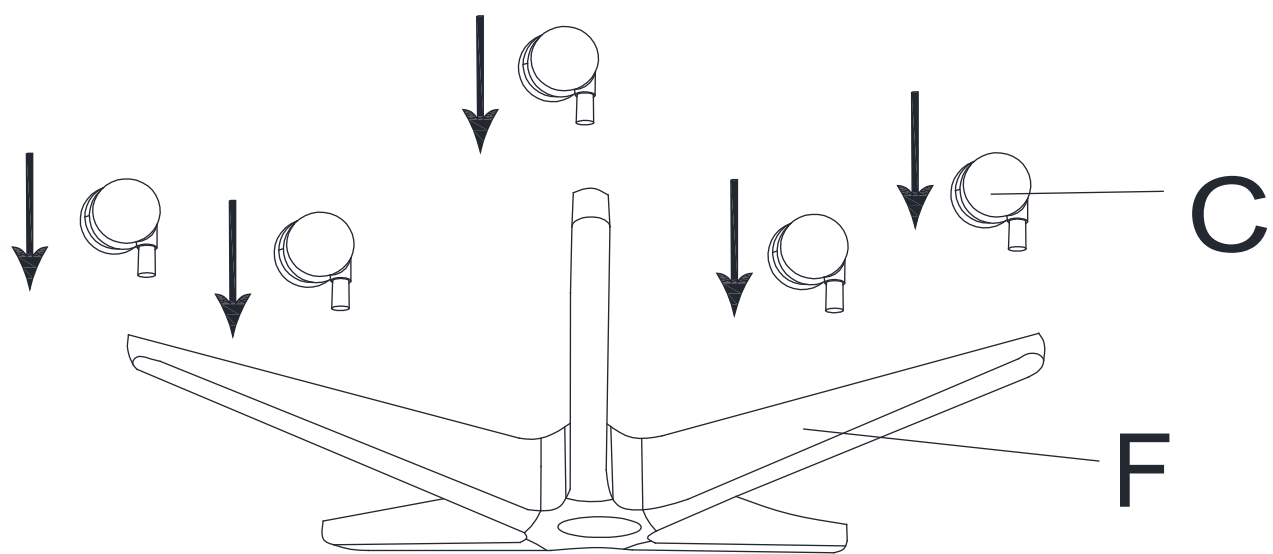


Insert 5 wheels(C)into the slot of the base leg(F)

3

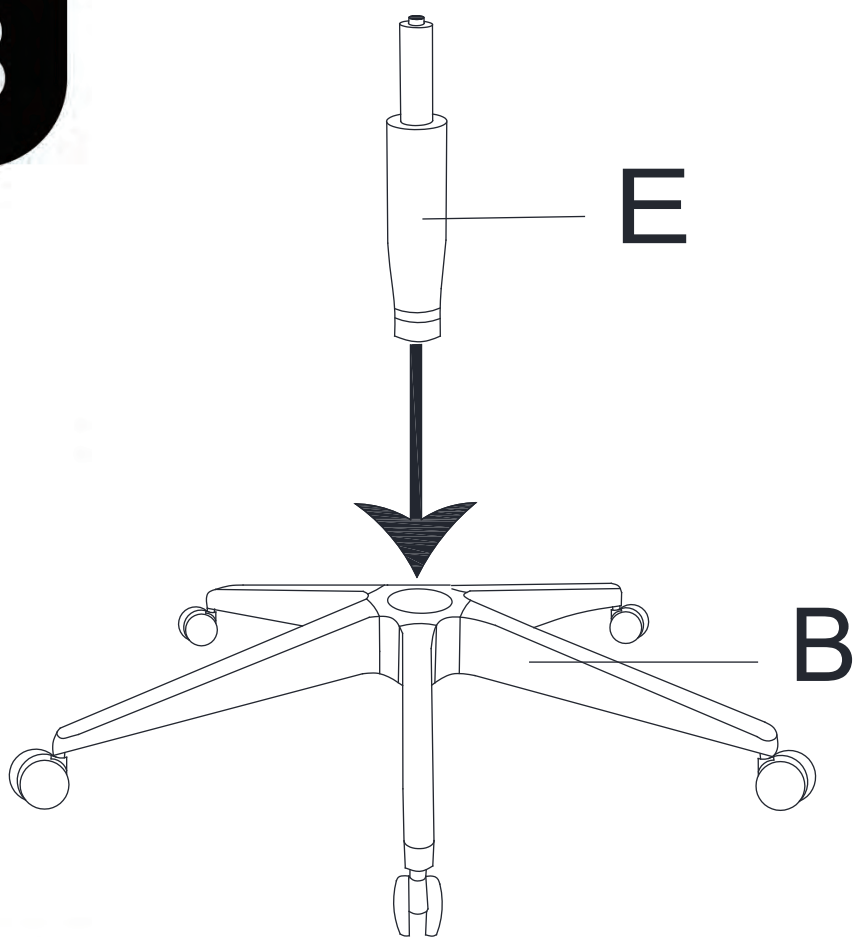

Install gas lift(E)ito the five star base(B)


4

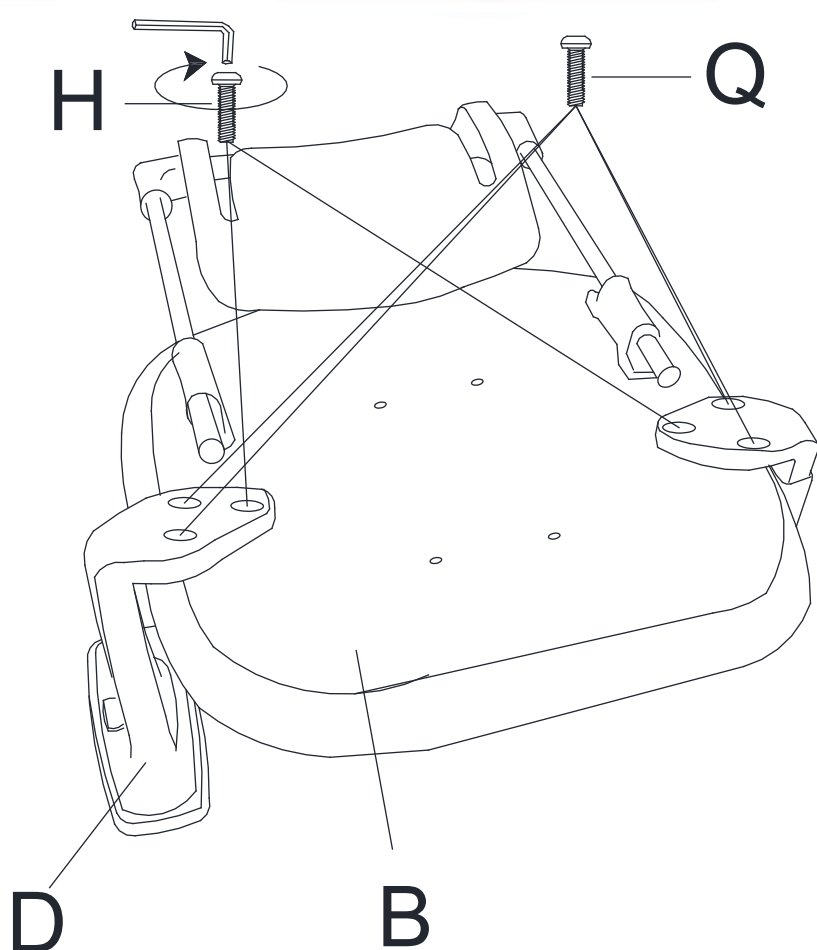

Attach the armrests(D)to the Seat(B)with the 2 screws M6*30(H) and 4 screws M6*35(Q)
Tips: The left and right armrests are distinguished by the mark (L/R) on the armrests.


5

Pull the pedal outwards

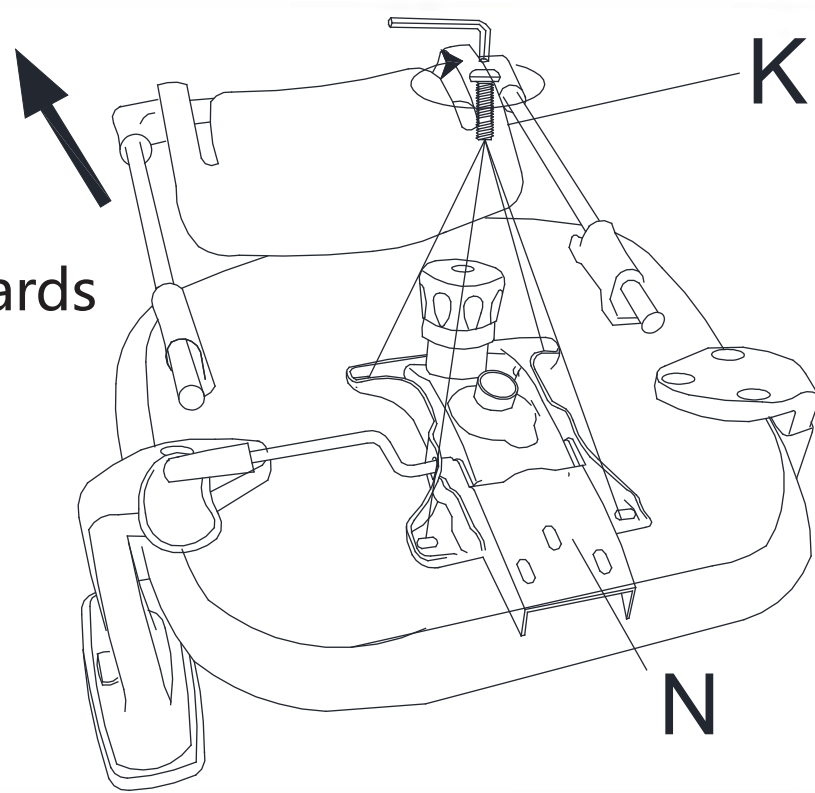


Attach the mechanism (N) to the seat (B) with 4pcs screws M6*20(K)
Tips: DO NOT tighten screws completely until all the screws are fixed in the correct position.

6

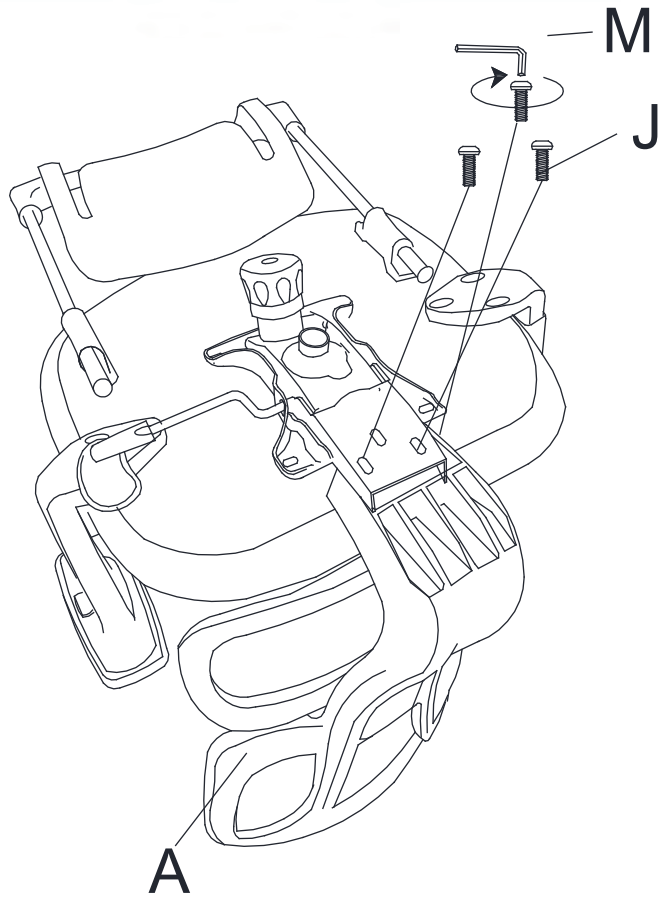


Attach the Backrest(A) to the seat(B) with 3pcs screws M8*40(J)

7

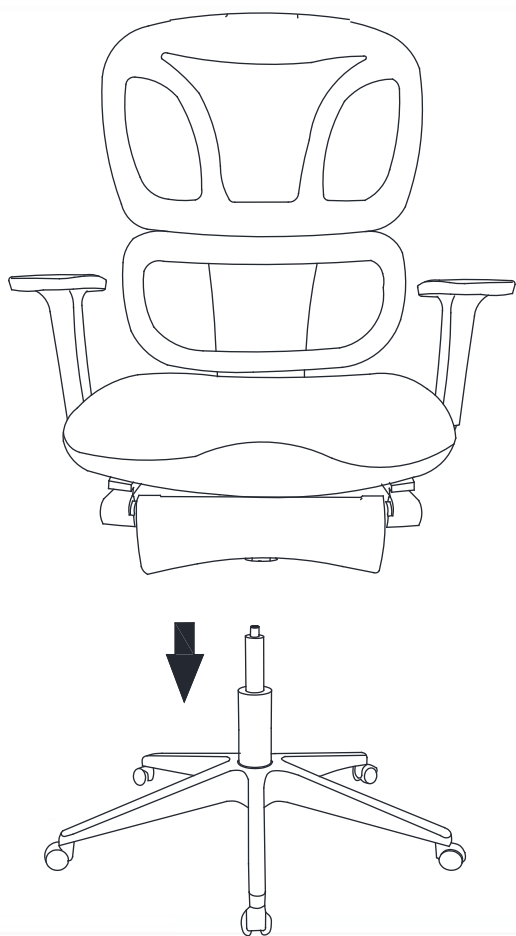

Place the Seat(B) on the gas lift(E)

8

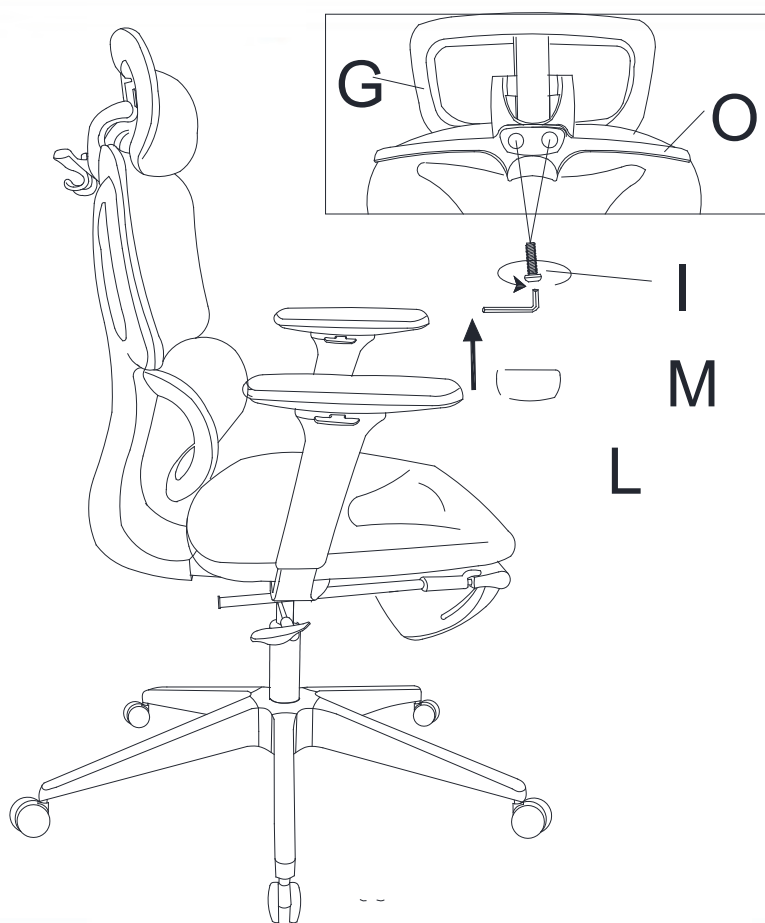

Insert the headrest (G) and hanger(O) to the backrest with 3pcs screws M6*40(K), and check the chair and make sure all parts and screws are securely tightened.
Finally attach the **Decorative part(L)** to the Backrest(A)

9



Chair Assembled


Function Introduction

Headrest adjustment:
Adjust the height and angle of the headrest


Armrest adjustment:
The armrest can be adjusted up and down,

Seat height adjustment:
Press the handle to raise or lower the chair
UP:
Requires a slight butt lift when turning the handle
Down:
Sit on a chair while turning the handle

Backrest adjustment:
Pull out the handle to adjust it backward, and push the handle chair to lock (Can be fixed at 4 angles). It takes a bit of body pressure on the backrest to bring it back to a smaller angle.

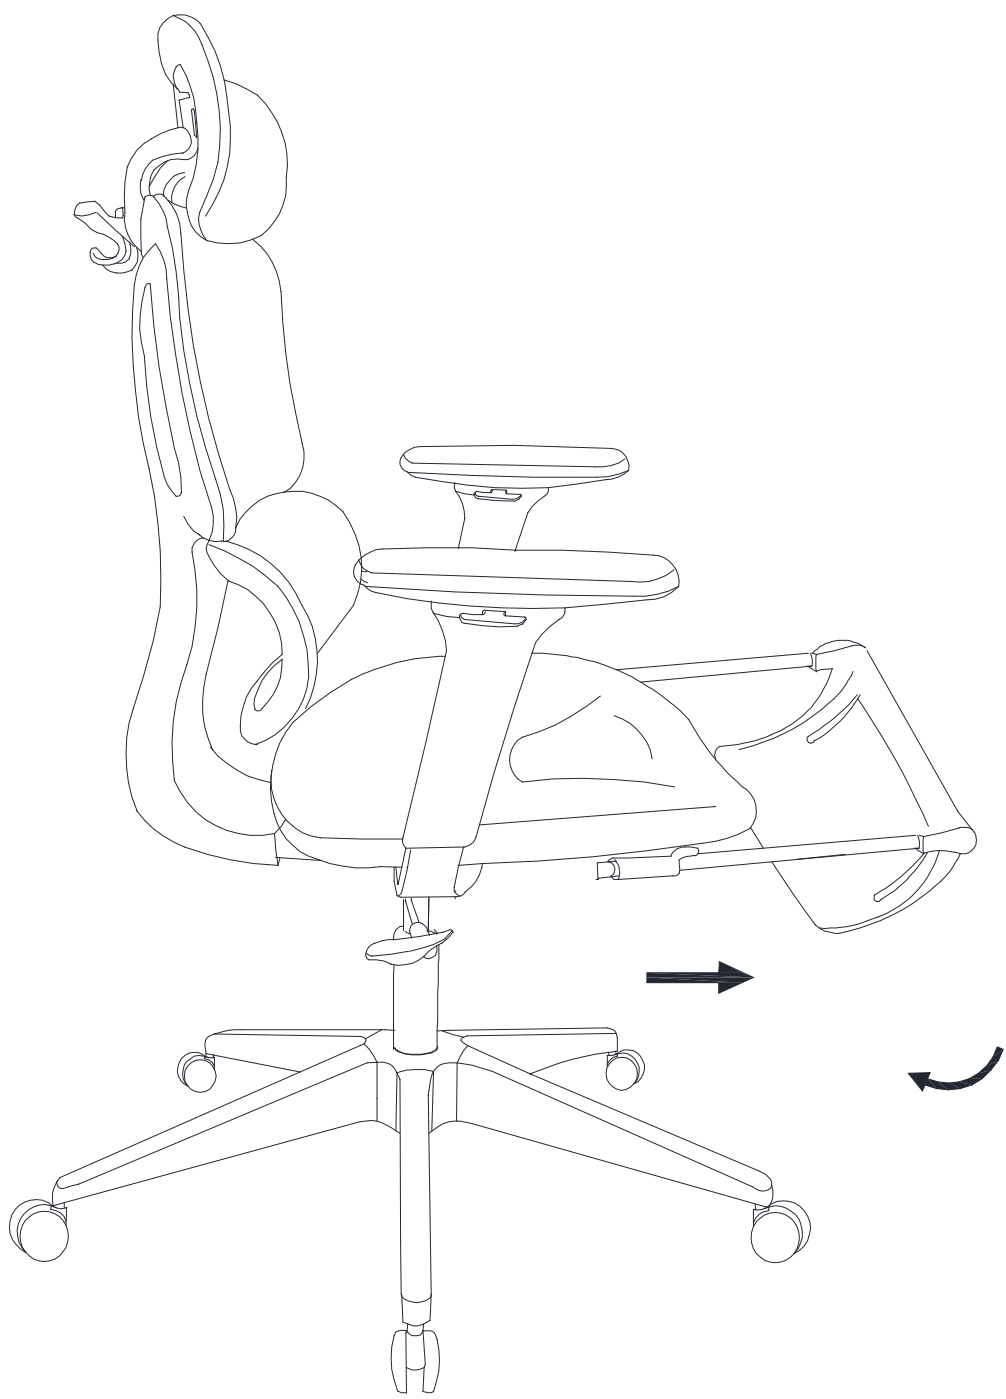

**Pull out the footrest/leg rest,
flip the pedal**

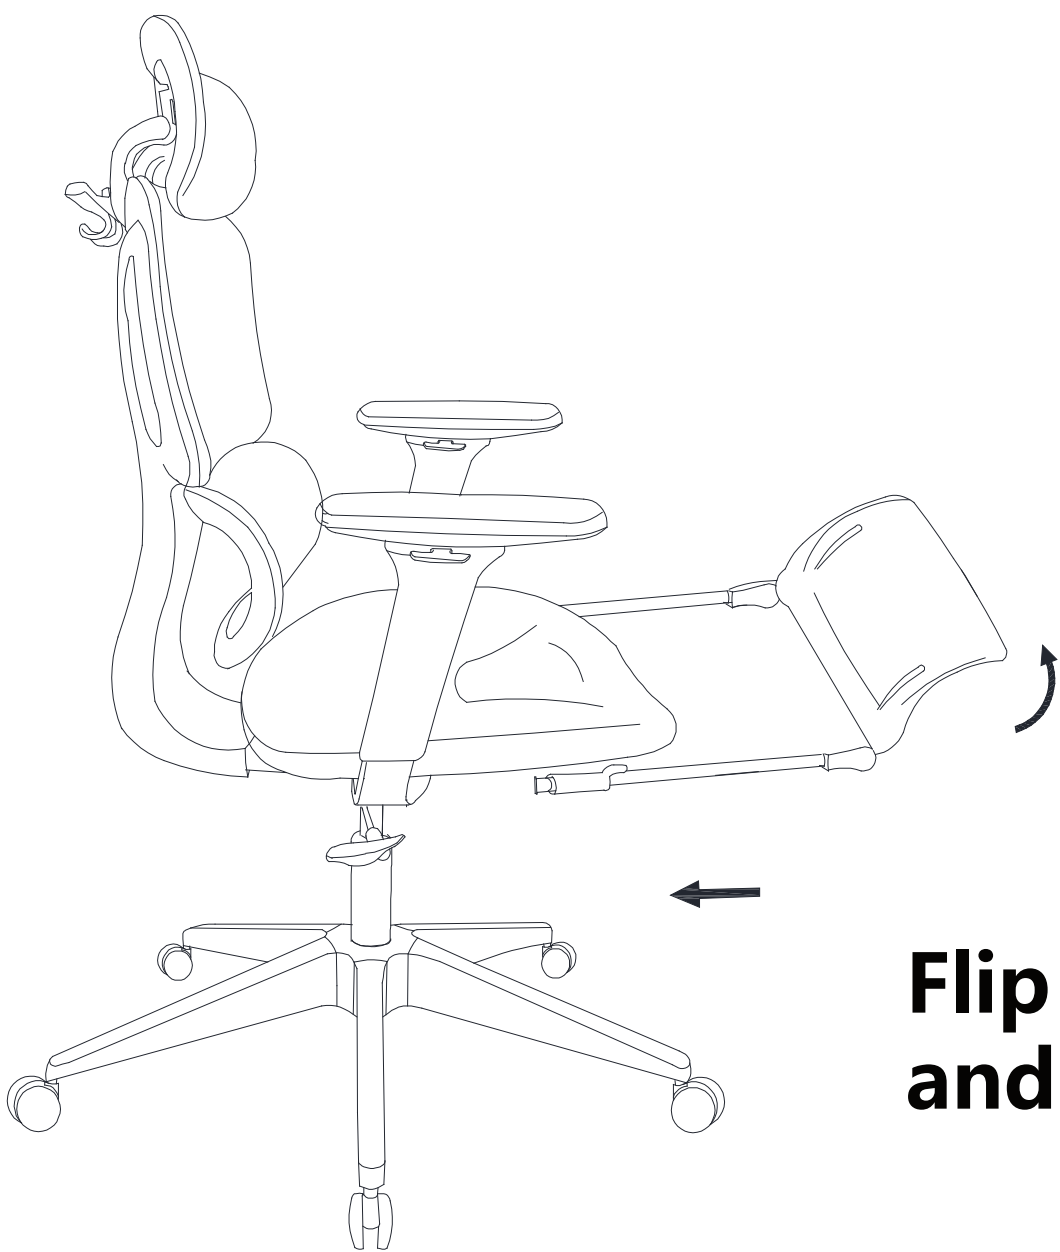

**Flip the pedals to their original position
and push the footrest/leg rest**