


Full retention Oil separator Vodaland OilBase100 -1 (S 1:16)

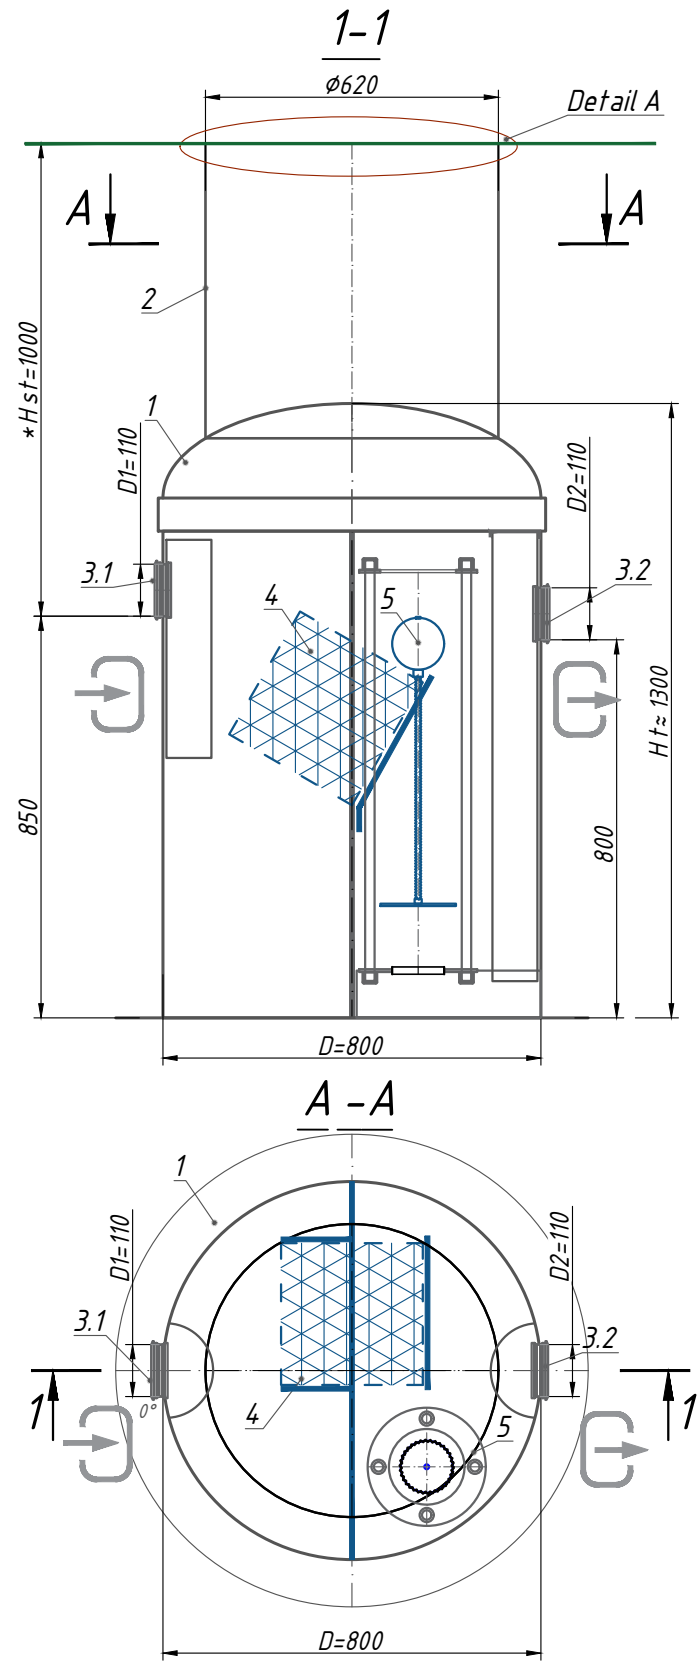


Specification of materials and equipment. Standard equipment ** (Tabl. 1)


Pos.	Identification	Name	Q-ty	Mass pc.,kg	Note
1	Vodaland	Full retention Oil separator Vodaland OilBase100 -1, disch. 1l/s, (0 l/s -ByPass) fiberglass, D= 800, Ht≈ 1300 mm	1	70	compl.
2		Inspection manhole $\phi 620$	1		compl.
3.1,3.2	D1-Inlet / D2-Outlet	Rubber seal for connection $\phi 110$	2		compl.
4		Coalescent block	1		compl.
5		Automatic locking device D110	1		compl.
		Volume of light liquids	50		l
		Volume of sludge trap	100		l
		Usable volume	430		l

**The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information


Full retention Oil separator

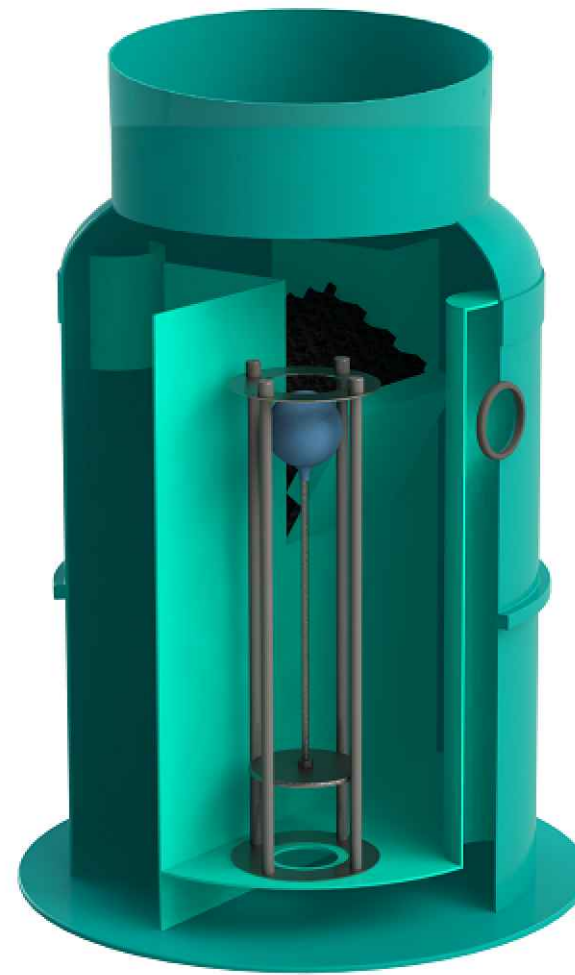

Standard equipment

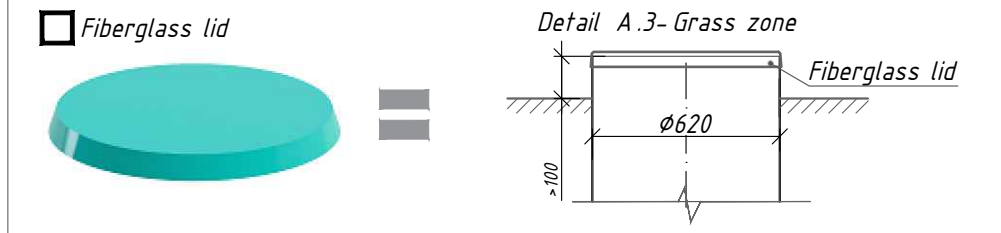

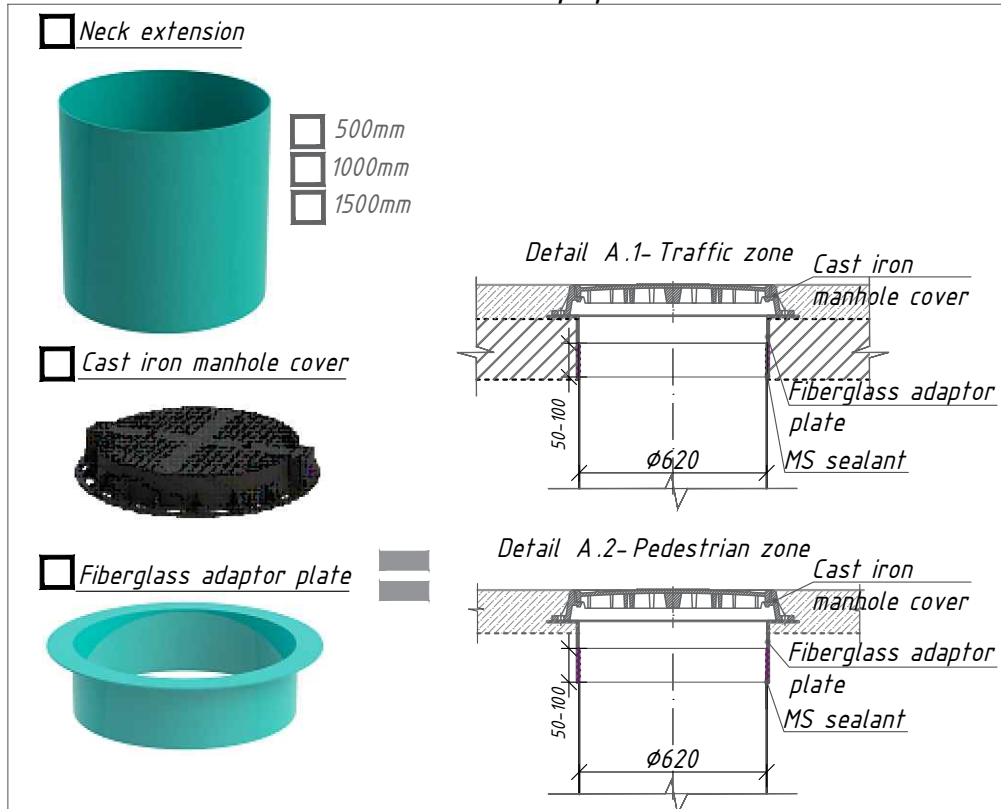

Additional equipment



Note:

*H-depth of the inlet connection (in standard equipment H up to 1000 mm. H take a multiple of 50mm.
 **The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information.
 ***The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole.
 Engineering tolerance of deviation from base dimension is 1-3%.

Additional Information:

Full retention Oil separator OilBase100 -1		Unit 7, Agecroft Trading Estate, Langley Road, Salford M6 6JD, United Kingdom
Factory ID:	OB1-1	
 manufactured by Ukraine, Cherkasy city, 18028		 distributed by