

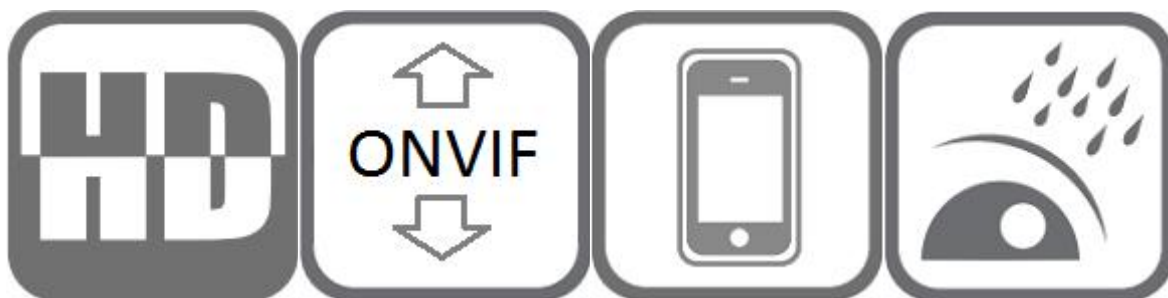


Model: IPC-YT824-RB

8MP red and blue flashlight alarm Dual light Turret POE IP camera

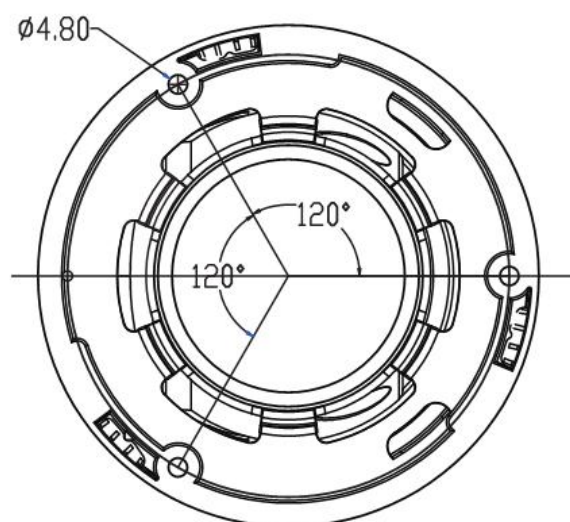

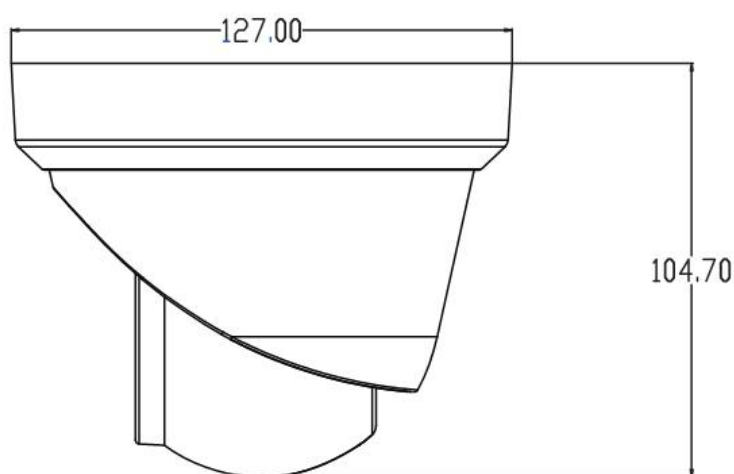

Features:

- 1/2.7" CMOS sensor
- 4K resolution 3840 x 2160P
- Low illumination 0.01Lux
- Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- D-WDR, Motion Detection, Privacy Mask, Mirror
- RTSP and Onvif 17.06 compatible
- H.265/H.264 dual-stream media server
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- Two way audio, Built in Microphone and Speaker ,
- with SD card slot(support up to 512GB SD card,default not with SD card)
- Support audio alarm to warn intruders off
- Lightning protection 4000V
- Strong water-proof housing, IP67
- 2PC red and blue flashlight alarm Light(1 red &1 blue)
- Red&Blue LED flash alarm and colorful imaging when detect human body or vehicle
- 2PCS Dual Lights(IR LEDs & Warm Light LEDs),Light distance:20-30M, Three light Modes:

Mode 1: Smart Dual Light

Mode 2: Pure Infrared Light

Mode 3: Pure White Light

- HD 2.8mm F1.6 fixed lens

Technical Specifications:

Model	IPC-YT824-RB
Camera	
Image Sensor	1/2.7" CMOS
Effective Pixels	3840×2160
Electronic Shutter	AUTO/Manual: 1/10s ~ 1/10000s, shutter threshold

Min. Illumination	0.01Lux@F1.6(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
White Balance	Auto/Manual
BLC/HLC	Support
DNR	2D/3D DNR
Light Control	Auto/Manual, Brightness level (0-100%) adjustable
WDR	100db WDR
Other	Multi-lines OSD, Custom Title, Privacy Mask, Flip
Encode	
Video Standard	H.264/H.265/H.265+
Video Resolution	Main Stream: 20fps@3840x2160,25fps@3072x2048,30fps@5MP/2560×1440/2304×1296/1920×1080/1280×720 Sub Stream: 30fps@D1/VGA(640×480)/640×360,480×360,CIF(352×288)
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes, Audio Echo Cancellation
Built-in Speaker	Yes, Two-way audio
Memory Slot	Yes, maximum 512GB
OSD Overlay	Title and Time overlay
Smart Detection	
Motion Detection	Support
Line-crossing	Support
Filter Static Target	Support
Target Detection	Human, vehicle, non-motor vehicle
Smart Alarm Linkage	
Show Target Rectangle	Support
Blink Detection Area	Support
Blink Video Border	Support
Blink White Light	Support
Upload Alarm Center	Support
Alarm Push To App	Support
Trigger Audio Siren	Support
Trigger Red&Blue flashing	Support
Trigger Record & snapshot	Support

Led	
Fill light	2PCS Dual Lights(IR LEDs & Warm Light LEDs)
Red & Blue alarm light	2PC red and blue flashlight alarm Light(1 red &1 blue)
Light Distance	20-30 M
Lens	
Focal length	2.8 mm fixed lens
Language	
English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, etc.	
Storage	
TF card (Max.512G), Cloud plan, NVR, Youtube (RTMP), FTP or Email (image), NFS(NAS)	
Network Services	
Protocol	HTTP/RTSP/FTP/NFSv3/SMTP/DHCP/NTP/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE 802.3af/at 48V
Power Supply	12 VDC $\pm$ 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH