


975L
ARROW

SCORPION

LOW PROFILE LIGHTBAR

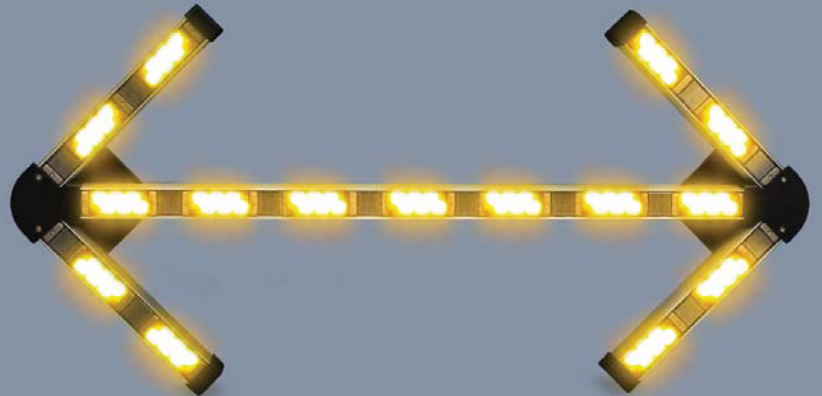

TOMAR



975L ARROW SCORPION

LOW PROFILE ARROWBAR

The 975L Scorpion™ Arrowbar features an all-aluminum housing, hermetically sealed lamp modules and waterproof connectors for extreme durability.

The 975L Arrowbar is available in 48" and 60" Arrowbar to meet MUTCD requirements for a type D device. When mounted on a suitable backboard the 48" arrow meets the MUTCD requirement for a type A device and the 60" arrow bar meets the requirements for a type B device.

The internal Controller allows for single wire activation of all arrow modes, warning modes and nighttime dimming without the need for a special external controller.

All Arrowbars come standard with a 20' power/control cable. longer cable lengths are available.

- Conforms to Manual on Uniform Traffic Control Devices (MUTCD) 2009 Edition, Type D Vehical Mounted devices
- Extruded Aluminum Housing
- Nighttime Dimming
- Easy maintenance and lamp replacement
- Hermetically sealed lamp modules
- Potted controller and waterproof wiring
- Available in 48" and 60 lengths
- 5 Year Warranty



943-SB Controller
Available Separately

975L Arrow Scorpion Half Bar Specifications

Item	Description
Electrical	12 VDC operation, 5.4A Typical average amp draw in full warning mode on a 48" bar.
Size	Width: 48" Height: 24" Width: 60" Height: 30"

TOMAR Electronics, Inc.
Clearing the Way