

970x-72DTP-xx NFPA LIGHTBAR

FACTORY SET FLASH PATTERNS

Progressive Slide Switch application:

Mode 1: +12 Vdc **ORANGE** Control Wire Activated

Front Warning Lamps: Inboard / Outboard - Single Flash 75

Rear Warning Lamps: N/A

Side Warning Lamps: Alternating Front / Rear, Both Sides Concurrently - Single Flash 75

Mode 2: +12 Vdc **ORANGE & BLUE** Control Wires Activated

Front Warning Lamps: Combination - Double Flash 110

Rear Warning Lamps: N/A

Side Warning Lamps: Alternating Left / Right, Front and Rear Lamps Concurrently - Double Flash 110

Front White TD's Flashing

Side Whites Flashing

Mode 3: +12 Vdc **ORANGE & BLUE & WHITE/BLACK** Control Wires Activated

Front Warning Lamps: Combination - Double Flash 110

Rear Warning Lamps: N/A

Side Warning Lamps: Alternating Left / Right, Front and Rear Lamps Concurrently - Double Flash 110

Front White TD's Flashing

Side Whites Flashing

Independent Switch application:

Mode A: +12 Vdc **ORANGE** Control Wire Activated

Progressive Slide Mode 1 configuration above, is MODE A

Mode B: +12 Vdc **BLUE** Control Wire Activated

same configuration as Progressive Slide Mode 2 above

Mode C: +12 Vdc **WHITE/BLACK** Control Wire Activated

same configuration as Progressive Slide Mode 3 above

Mode D: +12 Vdc **ORANGE & BLUE** Control Wires Activated

Progressive Slide Mode 2 configuration above, is MODE D

Mode E: +12 Vdc **ORANGE & WHITE/BLACK** Control Wires Activated

same configuration as Progressive Slide Mode 3 above

Mode F: +12 Vdc **BLUE & WHITE/BLACK** Control Wires Activated

same configuration as Progressive Slide Mode 3 above

Mode G: +12 Vdc **ORANGE & BLUE & WHITE/BLACK** Control Wires Activated

Progressive Slide Mode 3 configuration above, is MODE G

970x-72DTP-xx NFPA LIGHTBAR

CONTROL & POWER WIRES

| | |
|-----------------------------|--|
| Red | +12 Vdc Power |
| Black | GROUND |
| Orange | Mode A Control (Progressive Slide Mode 1) |
| Blue | Mode B Control |
| White/Black | Mode C Control |
| Orange & Blue | Mode D Control (Progressive Slide Mode 2) |
| Orange & White/Black | Mode E Control |
| Blue & White/Black | Mode F Control |
| Orange & Blue & White/Black | Mode G Control (Progressive Slide Mode 3) |
| Green | LED Low Intensity |
| Brown | Takedowns and Front White Override |
| White | California Steady (not overridden by Takedowns and Front Whites) |
| Gray | Driver Alley and/or Driver Side White Override |
| Yellow | Passenger Alley and/or Passenger Side White Override |
| Red | Preemption Emitter Enable |
| Violet | Preemption Parking Brake Shutoff and Warning Mode Override to Mode A |
| Red/White | Not Used |
| Brown/White | Not Used |
| Red/White & Brown/White | Not Used |
| Tan | Not Used |
| Red/Yellow | Not Used |
| Red/Black | Not Used |
| Red/Green | Not Used |
| White/Blue | Not Used |
| Pink | Not Used |
| Pink & White/Blue | Not Used |

Mode Activation: All control wires, except Green and Violet, are +12 VDC activated. The Green wire (LED Low Intensity) is GROUND activated. The Violet wire (Parking Brake Shutoff) is configurable for +12 VDC or GROUND (default) activation. The Parking Brake Shutoff mode (for Preemption Emitter) is configurable as Latching or Non-Latching (default), for Warning Override the mode is always Non-Latching.

FUNCTION PRIORITIES - WIRED

| | |
|--|------------------|
| California Steady | Highest Priority |
| Takedowns (and Front Whites of Dual Color lamps) | |
| Passenger Alley (and Passenger Corner Whites) | |
| Driver Alley (and Driver Corner Whites) | |
| LED Low Intensity | |
| Warning Mode | Lowest Priority |

NOTE: Activating the Violet wire will, A) Shutoff the Preemption Emitter if it has been activated, and B) Override the Warning Mode, switching to Mode A/Progressive Slide Mode 1, if a Warning Mode other than Off or Mode A is currently activated.

970x-72DTP-xx NFPA LIGHTBAR

DIGITAL CONTROL

| | |
|--------------|--|
| Red | +12 Vdc Power |
| Black | GROUND |
| Orange | Preemption Emitter Enable |
| Brown | Preemption Parking Brake Shutoff and Warning Mode Override to Mode A |
| DCP 1 Button | Driver Alley (and Driver Corner Whites) |
| DCP 2 Button | Passenger Alley (and Passenger Corner Whites) |
| DCP 3 Button | Takedowns (and Front Whites of Dual Color lamps) |
| DCP 4 Button | Not Used |
| DCP 5 Button | Not Used |
| DCP 6 Button | Not Used |


Mode Activation: The Orange wire is +12 VDC activated. The Brown wire (Parking Brake Shutoff) is configurable for +12 VDC or GROUND (default) activation. The Parking Brake Shutoff mode (for Preemption Emitter) is configurable as Latching or Non-Latching (default), for Warning Override the mode is always Non-Latching.

FUNCTION PRIORITIES - DIGITAL

| | |
|--|------------------|
| California Steady | Highest Priority |
| Takedowns (and Front Whites of Dual Color lamps) | |
| Passenger Alley (and Passenger Corner Whites) | |
| Driver Alley (and Driver Corner Whites) | |
| LED Low Intensity | |
| Warning Mode | Lowest Priority |

NOTE: Activating the Brown wire will, A) Shutoff the Preemption Emitter if it has been activated, and B) Override the Warning Mode, switching to Mode A/Progressive Slide Mode 1, if a Warning Mode other than Off or Progressive Slide Mode 1 is currently activated.

Example Layout for 970x-72DTP-RR

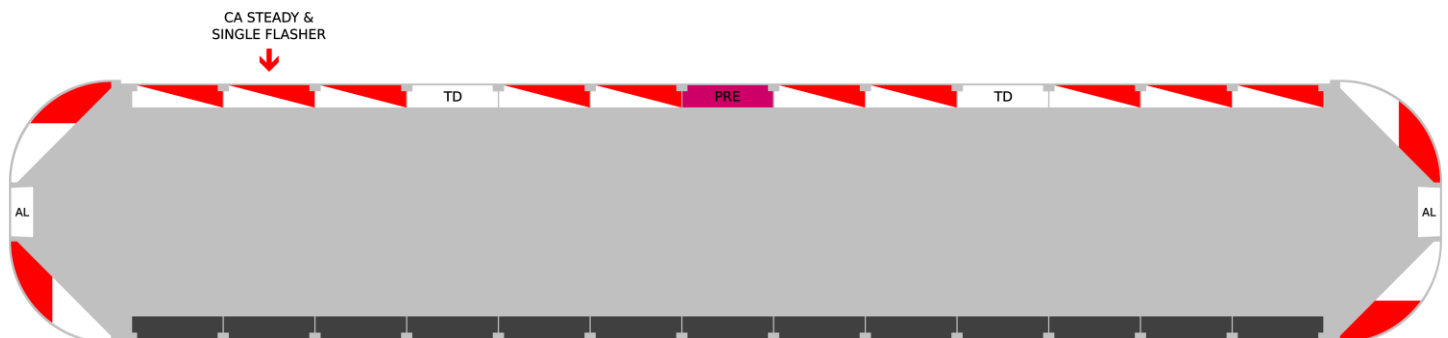

970x-72DTP-xx NFPA LIGHTBAR

FRONT WARNING LAMP PATTERNS:

- 1) OFF
- 2) COMBINATION (PATTERN 5, 4, 3, 4, REPEAT)
- 3) INBOARD / OUTBOARD
- 4) LEFT / RIGHT
- 5) ALTERNATING
- 6) RANDOM
- 7) SINGLE OUTBOARDS ONLY
- 8) DUAL OUTBOARDS ONLY
- 9) SINGLE FLASHER
- 10) SINGLE INBOARDS ONLY
- 11) DUAL INBOARDS ONLY
- 12) ALL ON
- 13) SWEEP (TRAILING ARROW / ALTERNATING L-R)

Note: All patterns can be programmed to operate with or without flashing TAKEDOWNS.

Note: All patterns can be programmed to operate with or without (default) a CA Steady lamp. In Program Mode, tap the Violet wire (Wired control) or Brown wire (Digital control) to ground to toggle the CA Steady functionality On and Off.

REAR WARNING LAMP PATTERNS (ALL BLANK, Non Used):

N/A

SIDE WARNING LAMP PATTERNS:

- 1) OFF
- 2) ALTERNATING LEFT / RIGHT, REAR SIDE LAMPS ONLY
- 3) ALTERNATING LEFT / RIGHT, FRONT SIDE LAMPS ONLY
- 4) ALTERNATING FRONT / REAR, BOTH SIDES CONCURRENTLY
- 5) ALTERNATING LEFT / RIGHT, FRONT / REAR LAMPS CONCURRENTLY

Note: All patterns can be programmed to operate with or without flashing ALLEYS (and White Corners).

FLASH RATES:

- 1) SINGLE FLASH (75 FPM)
- 2) DOUBLE FLASH (110 FPM)
- 3) NEOBE® FLASH (64 FPM)
- 4) SCROLL FLASH WARNING PATTERNS (4 SECONDS EACH OF ALL RATES)

NOTE: Each section of the lightbar can operate at different flash rates in the same mode **and/or** the lightbar can operate at different flash rates in each mode.