

MODEL T10

SOFT SERVE FREEZER

SINGLE FLAVOR, COUNTERTOP, GRAVITY FEED



Ideal for **medium capacity outlets** to add soft serve ice cream and frozen yogurt. Low profile design keeps operation simple and helps reduce cost of ownership.



FAST FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



DIGITAL CONTROL AND DISPLAY

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.



LOW MIX INDICATOR

Light turns "ON" at low mix to alert operator to add mix



SELF CLOSING DISPENSING VALVE

Automatically prevents product overflow after dispense



DISPENSE SPEED CONTROL

Provides flexibility in dispense rate control for different applications



STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



SAFETY PROTECTIONS


- Low temperature and motor overload shut-off to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

**MOST COMPACT AND VERSATILE SINGLE FLAVOUR COUNTERTOP
MODEL FOR SOFT SERVE ICE CREAM AND FROZEN YOGURT**

MAXIMISE YOUR PROFITS

MODEL T10

SOFT SERVE FREEZER MACHINE

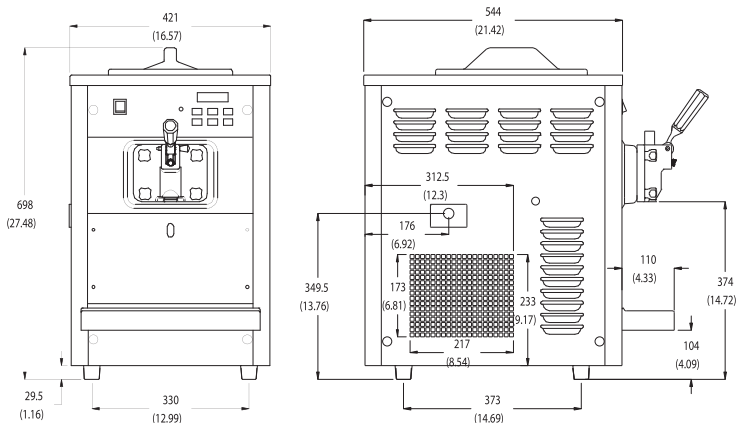

ISO 9001
REGISTERED

SPECIFICATIONS

Flavours	1
Freezing Cylinders	1 x 1.7L
Mix Hoppers	1 x 8.0L
Output Capacity (80 grams)	130 serves/hr
Clearance Requirements	152mm/6" on back

WEIGHT

	KG/LB (Gravity)	KG/LB (Pump)
Net	80 / 178	NA
Shipping	90 / 200	NA
Volume	0.33 CBM / 11.47 CBF	

DIMENSIONS

	NET (MM/IN)	SHIPPING (MM/IN)
Width	421 / 16.6	505 / 19.9
Depth	544 / 21.4	720 / 28.3
Height	714 / 28.1	895 / 35.2

ELECTRICAL

	MFS	MCA	POWER(KW)
110-115/60/1	20	16	1.8
220-240/50/1	13	8	1.8
208-230/60/1	20	10	1.8

FEATURES

CONTROL SYSTEMS	SINGLE DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT	<input checked="" type="checkbox"/>
LOW MIX INDICATOR ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR AMPERAGE PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
THERMAL OVERLOAD PROTECTION	<input checked="" type="checkbox"/>