

SIDE CONTROLS



This product includes a built-in seat sensor to avoid any accidental sprays while powered. During a power outage, wash functions can still be used with ambient water temperature and pressure.



FRONT WASH

Activates a front wash



Adjust the water pressure by rotating the control knob button.



REAR WASH

Activates a rear wash

Adjust the water pressure by rotating the control knob button.



TURBO WASH

Press the control knob button once while a wash is active to activate a Turbo spray with increased water pressure.

THERAPY WASH

Press the control knob button a second time while a wash is active to activate a Therapy Wash spray that alternates water pressure to assist in stimulating bowel movements.

STANDARD WASH

Press the control knob a third time during a wash to switch back to a standard wash.



WATER TEMP

During a wash cycle, press the "Water Temp" button repeatedly to adjust the water temperature.



HEATED SEAT

Press the "Seat Temp" button repeatedly to adjust the heated seat.





NIGHT LIGHT (3 Modes)

While not seated, long press the control knob button to switch between night light settings.




SELF-CLEANING

This product includes a self cleaning function that rinses the nozzles before each use.

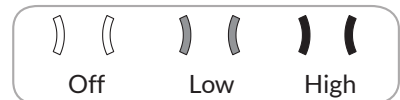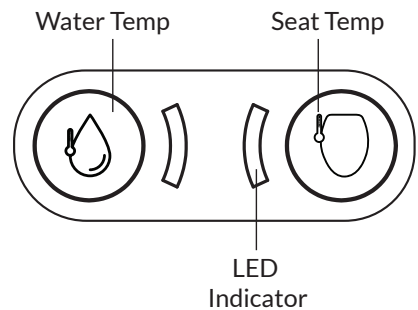

QUICK GUIDE

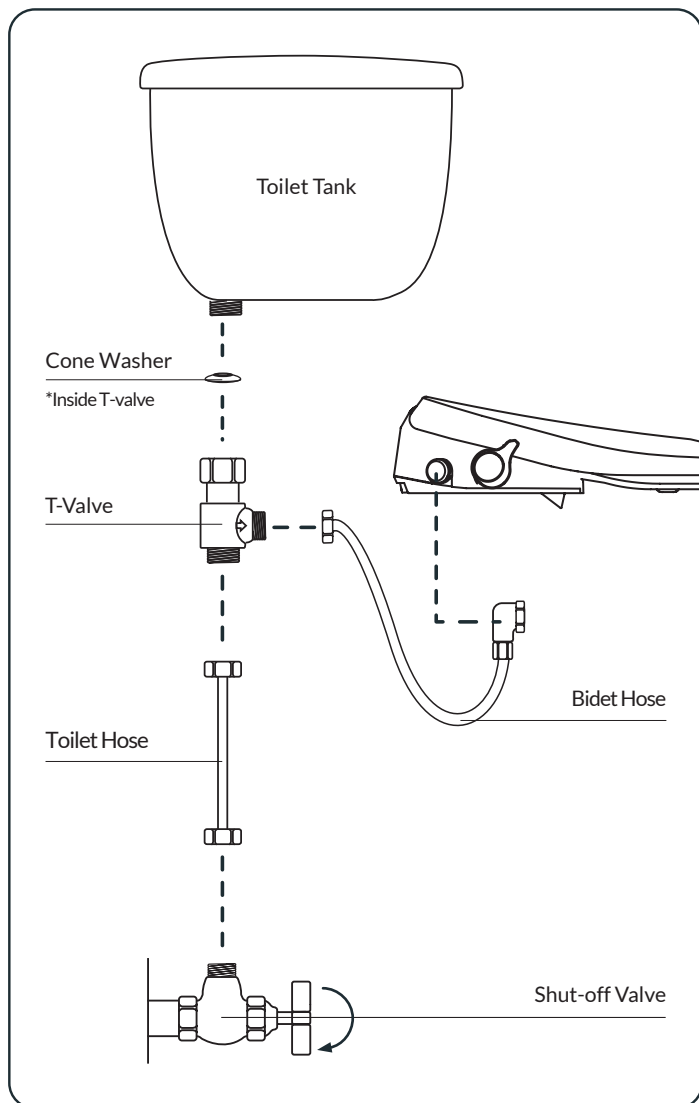

1. Turn Off Water

Turn off the water shut-off valve. Drain the toilet tank completely by flushing the toilet. Unscrew the hose connected to the toilet tank.


You may want to have a towel ready to catch any residual water.

2. Remove Toilet Seat

Remove the mounting bolts to release the existing toilet seat from the toilet.


3. Install Catch Plate

Insert the rubber anchors into the toilet mounting holes. Align the installation guide to the toilet rim. Place the catch plate and bolt guides over the mounting holes. Insert the bolts through the guides, catch plate, and rubber anchors. Fasten to secure the catch plate on the toilet with a Phillips screwdriver.

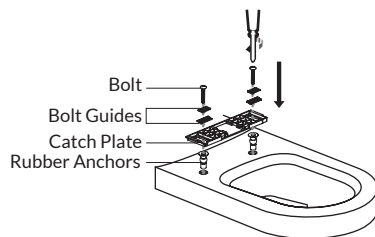

4. Attaching the BB-500

Slide the bidet seat all the way onto the catch plate until you hear a click.

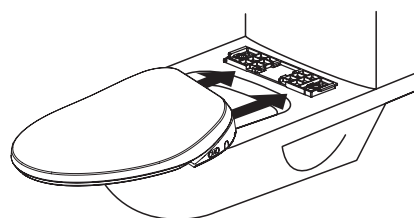

5. Connect the Water Hoses

Install the t-valve on to the toilet tank. Ensure the cone washer is properly seated inside the t-valve.

Connect your existing toilet hose to the water shut-off valve and t-valve.


Connect the bidet hose to the bidet seat and t-valve. Open the water shut-off valve. Check for any leaking or dripping. Use a wrench to tighten any loose parts.

Plug the power cord into a dedicated 120V power outlet.

BIOBIDET
BY BEMIS

Questions?
Contact our support team!

847.458.2334
support@biobidet.com
www.biobidet.com

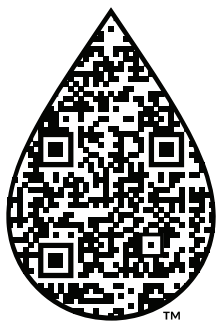

Installation and
Registration Resources