

PLATINUM FRIDGE / FREEZER DUAL COMPARTMENTS OPERATION MANUAL

EVAKOOL

CHILLED FOR GOOD TIMES

Manufactured
and packaged for
Nexberg Pty Ltd t/a EvaKool
16 Enterprise Street,
CALOUNDRA QLD 4551
Made in China
Tel: 07 5492 7777
Fax: 07 5492 7733

Exclusive to : -

**SUPERCHEAP
AUTO**

SRGS PTY LTD
ABN 23 113 230 050
6 Coulthards Avenue
Strathpine QLD 4500, Australia
MADE IN CHINA



RIDGE GEAR
RYDER ADVENTURE



RIDGE GEAR
RYDER ADVENTURE

Please read this manual carefully
before using your unit.

PLU:579982



- **3 Flashes every 4 seconds: Compressor Start Issue**
 - Unplug cable and allow unit to rest for 10 minutes.
 - Try on different power source (vehicle or 240V AC power).
 - Electronic box fault.
 - Compressor fault.
- **4 Flashes every 4 seconds: Low Motor Speed**
 - Reduce products / items inside unit.
 - Move so unit is in a lower ambient temperature; clean vents / ensure clear air flow over compressor.
 - Fan fault.
- **5 Flashes every 4 seconds: Over Temperature**
 - Ambient temperature too high.
 - Clean vents / ensure clear air flow over compressor.
 - Fan fault.

Can hear the sound of running water from inside the unit

- This is normal, due to the flow of refrigerant in the unit.

Unusual noise when refrigerator is working

- The refrigerator is not placed on a level surface.

If none of the above solves your issue please contact Evakool on 07 5492 7777 or warranty@evakool.com for details of your closest Evakool service centre.

6. International Certification Approvals



Section	Page
Key Product Features	2
Safety Instructions	3
Notes on using the product	3 - 4
Operation	4
Cleaning and Maintenance	5
Troubleshooting	5
Safety Certification	6

- Do not store the unit if it is wet inside or without leaving the lid open.
- NEVER submerge the unit or clean under running water. Do not use abrasive cleaning agents or hard objects during cleaning as these can damage the unit.

5. Troubleshooting

The unit is not turning on

- Check whether the unit has been turned on.
- Check the power supply is turned on (try a different power source / vehicle / socket).
- Check whether the plug and the socket have a good connection.
- Check whether the 10 Amps glass fuse which located in the DC power cable has not been burned out or blown.

Low refrigeration performance


- There may be too much product placed inside the unit at once for effective cooling.
- There is too much warm product inside the unit.
- The lid is unlatched / or open.
- The lid seal is broken.
- Problems arising from poor ventilation (allow 100mm of space around all vents).
- The ambient temperature is too high.
- The temperature setting is too high.

Faulty LED flashing

- 1 Flash every 4 seconds: Low Voltage
 - Try on different power source (vehicle or 240V AC power). If changing the power source is successful and this fixes the issue then there may be an issue with the original power source.
 - Ensure cabling between fridge and battery is at least 4mm thick, if the distance is more than 2 metres then use at least 6mm thick cable.
- 2 Flashes every 4 seconds: Fan Issue
 - Fan is drawing too many Amps (over Amps), fan needs to be replaced, contact Evakool for details of your closest service centre.

Key Product Features:

- 73.5 Litre total capacity , 46L fridge and 27.5L freezer
- Dual compartments, separate temperature control
- Powered by 12/24 Volt DC compressor
- Reliable electronics, high efficiency, low energy consumption
- Multi-voltage system DC (12 and 24 Volt) and AC (240 Volt) operation
- Dual digital temperature readout
- Two speed setting with turbo performance
- Sturdy carry and tie down handles
- Rugged case
- 10A Circuit Breaker
- Three year EvaKool nationwide warranty



Internal LED light



Multi-voltage system



Sturdy carry and tie down handles



Rugged fully insulated metal cabinets



DC/AC power cables



Ice cube tray

1. Safety Instructions

- **WARNING:** Do not use your unit if any cabling is damaged, frayed or exposed.
- **WARNING:** Do not attempt or continue to operate your unit if it is wet.
- When using the unit ensure the circuit being used has a fuse or circuit breaker, recommended size for DC 12 Volt is 15 Amp, DC 24 Volt is 7.5 Amp.
- Make sure the voltage is within the correct range for socket and cable being used.
- Do not place any electrical devices inside the refrigerator as they may be damaged.

2. Notes on using the product


- Your unit requires good ventilation, especially around the vents of the refrigerator; allow a gap of at least 100mm around all vents.
- Do not allow a large amount of frost to build up on the inside walls as this may impair cooling. Defrost by turning the unit off, allowing the frost to melt and wiping out the water.
- The lower the ambient temperature, the lower the power usage. In order to maximize efficiency keep the unit in a cool location out of direct sunlight.
- It is recommended to operate the unit on a flat surface and must not be operated on an angle greater than 30 degrees.
- Power: DC (12 and 24 Volt) or AC (240 Volt)

Cable Length Specification

The DC cables must have a suitable cross-section for their length (measured from the battery to the unit), according to this table : -

Cable Thickness		12V Max Cable Length		24V Max Cable Length	
[mm2]	AWG	[m]	[ft.]	[m]	[ft.]
2.5	14	2.5	8	5	16
4	12	4	13	8	26
6	10	6	20	12	39
10	8	10	33	20	66

LED Control Panel

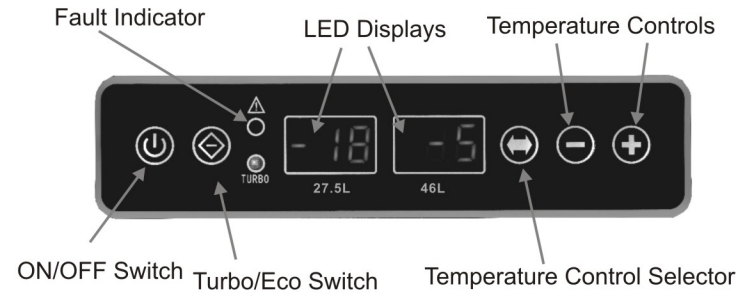

Temperature setting range: -18°C to 10°C

3. Operation

- Plug in the DC/AC power cable.
- Press button to turn on unit. The LED display on the control panel will turn on and the interior temperature is displayed.
- Press the button to choose adjusting the temperature of 27.5L/46L Compartment. Press the button, the LED figure in the 27.5L display will flash, which means you can now adjust the temperature of the 27.5L compartment. Press the button again, the LED figure in the 46L display will flash, indicating you can now adjust the temperature of the Compartment.
- Press the button UP or DOWN button to adjust the temperature the unit aims to achieve. Press the button to increase or the button to decrease the temperature.
- Press the Turbo button to increase the speed of the compressor. This setting can be used when you need to cool product quicker.
- If the power supply is cut off or disconnected, the unit will switch off automatically and once the power supply is restored it will automatically switch back on.

4. Cleaning and maintenance

- Clean the appliance inside and out with a clean damp cloth every week. If it is dirty, use sodium bicarbonate dissolved in lukewarm water to clean the unit.
- Never use abrasive products, detergents or soap. After cleaning, wipe out with a clean damp cloth and dry carefully.
- Do not store product inside unit if the unit is not on.