

Revision: 2

Date: July 2018

Supersedes all previous issues

Liano Cleanflush[™] **Easy Height**

Vitreous China 4.5/3 litre Dual Flush Wall Faced Close-Coupled Easy Height Toilet Suite









Vitreous China 4.5/3 litre Dual Flush **Wall Faced Close-Coupled Toilet Suite**



Liano Cleanflush[™] **Easy Height**



A universal design, the Liano Cleanflush™ Easy Height wall faced toilet suite conceals plumbing fittings for an aesthetically pleasing finish. The pan connection system includes the patented Caroma Uni-Orbital® Connector for increased installation flexibility. The Caroma Uni-Orbital® Connector extends to any position in a 50mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm - 200mm with a recommended setout of 140mm. The suite is suitable for use in domestic and commercial projects, and also for ambulant applications. Fitted with chrome plated metal push buttons, the smooth sided pan design offers a seamless finish to your bathroom.

Pan: Liano Cleanflush™ Easy Height 4.5 litre full flush washdown rimless pan with a fully glazed

Traps: Universal trap for S or P-trap installations.

 $\textbf{Liano Cleanflush}^{\text{\tiny{TM}}} \text{ cistern - has a free fitting lid and is suitable for domestic and light}$ Cisterns: commercial applications. Available as internal overflow. Standard back entry only.

Cistern inlet stop valve and inlet flex tube connection is concealed within the cistern and is

included

Vandal Resistant Conversion Kit – A simple to install conversion kit is available for the standard mechanism to lock the lid onto the cistern, recommended for use in heavy duty

commercial areas. Code No.750109.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant. Accurate wall setout for B.S.P. 1/2" Nipple water inlet

connection is essential.

Fixing: The cistern is fixed directly to the pan with a robust concealed base fixing system without the need for wall fixing.

Seats: The Liano soft close quick release toilet seat is provided as standard with the Liano suite. A

quality solid section compression moulded toilet seat, fitted with buffers and metal hinges.


Colours: White only

The installation of the toilet suite shall be in accordance with the normal minimum drainline Installation:

grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma

pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

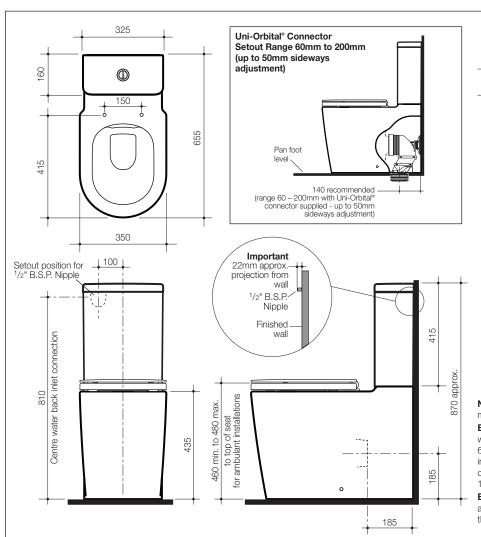

Liano Cleanflush™ Easy Height **Wall Faced Close Coupled** Toilet Suite with Liano Soft Close Seat Code No. 4.5/3 litre Back Entry Internal Overflow 766400W

Uni-Orbital® connector can be positioned 9 anywhere in shaded area in a 50mm arc outlet

D82 Concealed Fixing Bracket





Note: All height dimensions to underside of pan, make allowance for bedding when installing.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor

Bracket fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied