

Important Pre-Installation Information

- Please read this entire instruction book before commencing installation.
- A licenced tradesman must be used for the installation.

- Ensure there is a gasket between all glass and metal components.

- Leave the plastic protectors on the glass corners until the last possible moment and handle with care.


- Instructions to install the shower tray are included with the shower tray.

- In cold climates, warming the gaskets and seals with hot water or a hairdryer will assist installation.

- On symmetrical pieces of glass, the EZI Clean coating is only on one face. This face will have a sticker on it to identify it. This side must be installed on the wet side of the shower.


Maintenance

- The use of harsh or abrasive cleaners will cause deterioration of the EZI Clean coating. If water alone is not enough to clean the glass, Decina recommends the use of mild detergent solutions only.

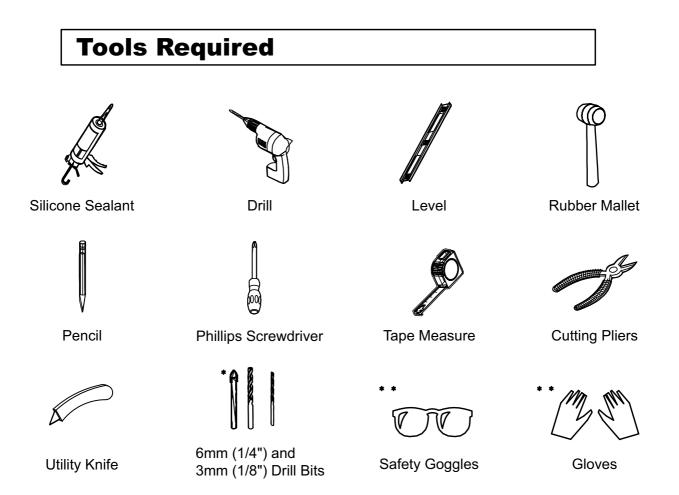

* Use the correct type of drill bit for the material being drilled, with 6mm required for anchor fixing and 3mm used for screwing directly into the wall studs.

** As with all toughened glass, take care while handling and wear safety goggles and gloves for personal protection.

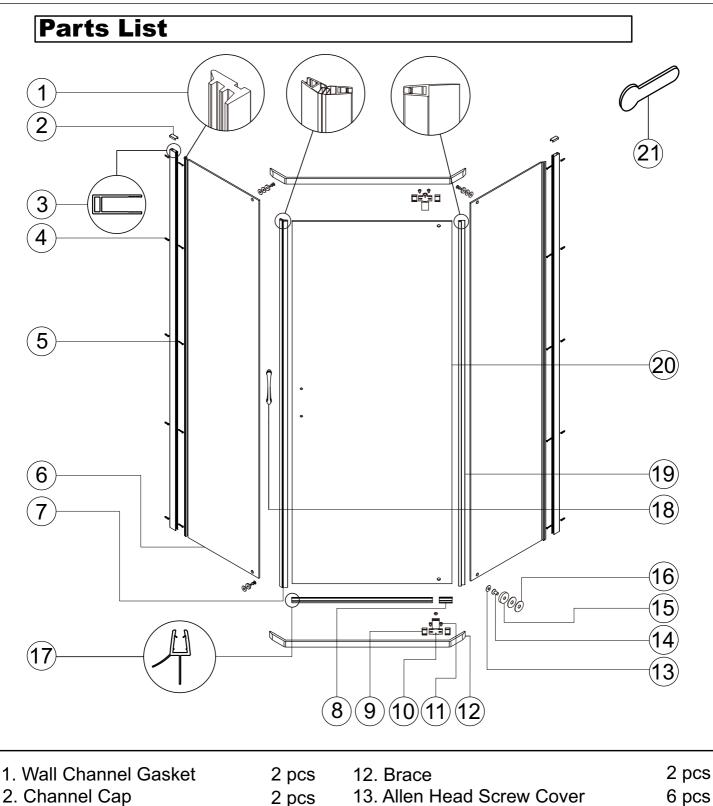

2 pcs

10 pcs


2 pcs

1 pcs

- 2. Channel Cap
- 3. Wall Channel
- 4. Wall Anchor
- 5. Phillips Head Screw ST4x40 10 pcs 2 pcs
- 6. Side Panel Glass
- 7. Magnetic Door Seal
- 8. Short Drip Strip
- 9. Hinge Back Cover 4 pcs 2 pcs
- 10. Hinge Assembly
- 11. Allen Head Screw M6x10 6 pcs
- 13. Allen Head Screw Cover 6 pcs 14. Countersunk Allen Head Screw 4 pcs 15. Clamping Washer 4 pcs 16. Plastic Washer 8 pcs 17. Long Drip Strip 1 pcs 18. Handle 1 pcs 19. Hinge Side Door Seal 1 pcs 20. Door Glass 1 pcs 21. Gasket Insertion Tool 1 pcs

Determining Wall Channel Location

When commencing step 1 on the following page, please refer to this drawing and the instructions below to assist in the correct location of the wall channels.

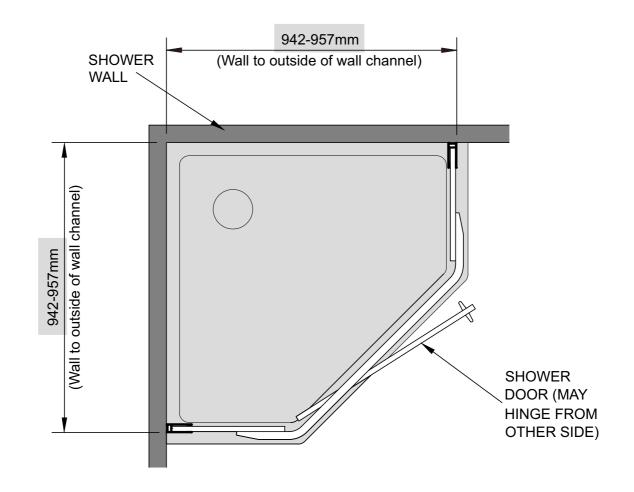

- Measure for the location of the outside edge of the wall channel from the inside of the shower wall. If a shower base is fitted, <u>do not</u> measure from the edge of the shower base to determine the position of the wall channel.

- If your wall and shower base are not at right angles the glass will not push fully into the wall channel at the top or bottom. This misalignment is acceptable if not exceeding 15mm, however the overall shower size will then increase by the amount of this misalignment.

- If the screen footprint does not turn out square while the aluminium braces are being installed (step 3), the glass can be pulled out from the full depth of the channel by up to 15mm to assist in squaring.

