

## Bench Mount Infrared Sensor Tap





T-3MSS-HMSTB


T-3MSS-HMSTB-TV

T-3MSS-HMSTM

T-3MSS-HMSTM-TV




240v Power supply




Available in mains or battery powered, with optional tempering valve

- Battery powered – 2x CR123 3V Lithium Batteries
- Mains powered – 6V transformer
- Full S/S construction
- Sensor range nominal: 50mm – 200mm
- Maximum run time: 60 seconds
- WELS 6 Star 4LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 50 degrees


Top



Front

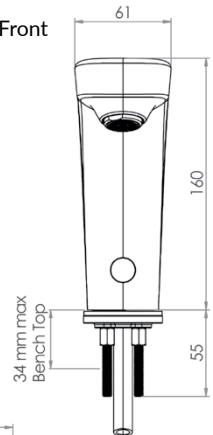

Side

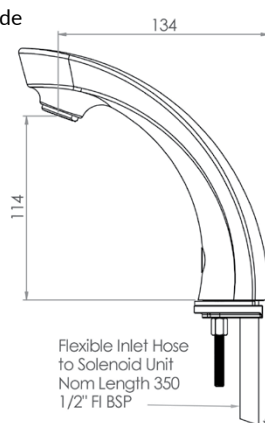

Flexible Inlet Hose to Solenoid Unit  
Nom Length 350  
1/2" FI BSP



T-3MSSP-HMST-3M

\* Power Supply with 3 metre lead available separately



T-3MSSP-HMST-M

T-3MSSP-HMST-CBS

T-3MSSP-HMST-BP