


# Dry-Flush Quick Mount Kit

## Instructions:


- 1) This kit should contain the following: Floor Mounting Template, Template for Mounting Plate (B), Battery Keeper Plate, Mounting Plate (A), Mounting Plate (B), Mounting Bracket, (7) Phillips Head Wood Screws, (4) Torx Head Screws.
- 2) Familiarize yourself with the instructions contained in this kit before proceeding. While we have made this kit as easy to install as possible, it will make the process much easier for you if you follow this step before installing the kit.
- 3) Begin installation by following instructions on Floor Mounting Template. Once complete the hardware should match what is seen in Figure 1.



- 4) Follow instructions included on Template for Mounting Plate (B).
- 5) Place the Dry-Flush toilet on the floor and on top of Mounting Plate (A). Place the Dry-Flush toilet just ahead of the Mounting Bracket as shown in Figure 2.

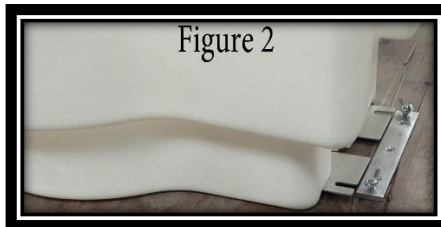

- 6) Ensure that the wing nuts are up high enough to allow the slots on the Battery Keeper Plate to slide beneath them.
- 7) Slide the Dry-Flush toilet along the floor into the Mounting Bracket. Slide the toilet over the bracket until the Battery Keeper is flush with the back of the Mounting Bracket as shown in Figure 3.

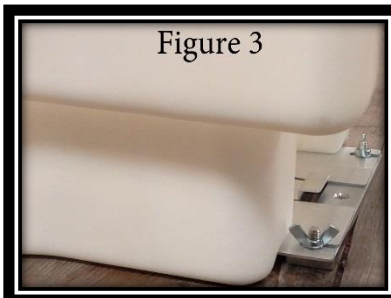

- 8) Tighten the wing nuts, and you're done!

**Please note:** Your Dry-Flush toilet works by changing air pressure within the unit. If for any reason you decide to remove the Mounting Plate (B) from the bottom of the unit, it is necessary to fill the mounting holes by putting the mounting screws back in their mounting positions. Failure to do this will cause air leaks in your Dry-Flush toilet which will hamper its ability to function correctly.