




Dart flyscreen fitting instructions HONDA MONKEY

Thank you for purchasing a Dart flyscreen. It has been carefully designed and manufactured to suit a specific motorcycle model and by following these instructions you should encounter no problems with fitting. The kit should comprise the following:

- 1 x polycarbonate screen
- 4 x EPDM rubber grommets
- 1 x left hand mounting bracket
- 1 x right hand mounting bracket
- 4 x stainless hex head machine screws
- 4 x thin M6 (0.8mm) washers
- 4 x thick M6 (1.6mm) washers

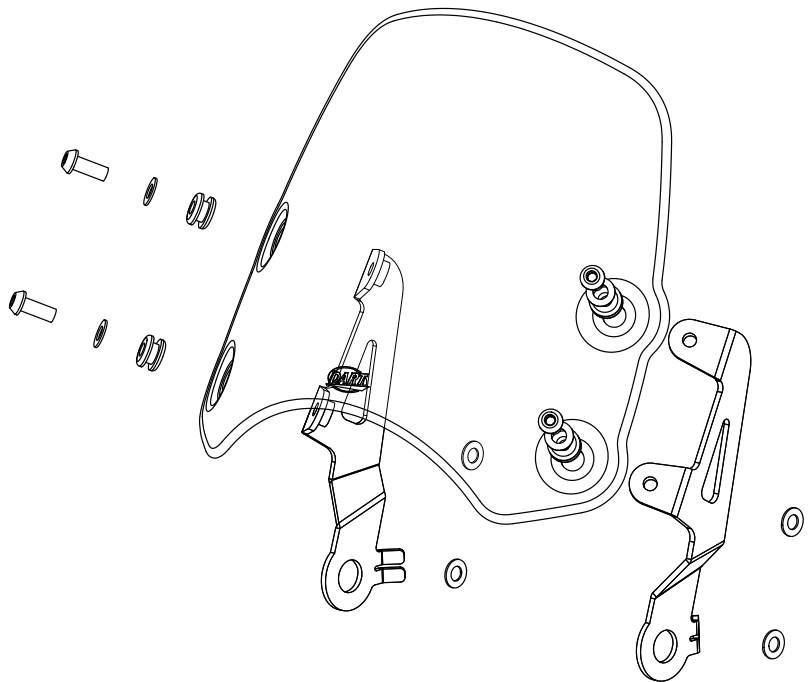

- 1 Fit the grommets to the screen - this is best achieved from the back of the screen blade.
- 2 Using a 5mm Allen key, remove the bolt holding the headlamp to the right hand headlamp bracket.
- 3 Using a 10mm spanner, remove the two bolts holding the headlight bracket to the bike.
- 4 Fit the THICKER 1.6mm washers between the headlight bracket the mounting frame on the bike, and refit the two bolts. These washers serve as spacers for the headlight bracket. Do not tighten the bolts yet.
- 5 Fit the screen mounting bracket between the headlight bracket and the headlight. Ensure the two prongs engage between the fins moulded in the side of the headlight. Refit the headlight bolt and tighten this, and the two rear bolts. This completes the fitting for one side.
- 6 Repeat operation for left hand side. If one side is fully tightened before the other is attempted then the headlamp should not need readjusting.
- 7 With both brackets fixed, hold the screen blade in position and loosely fit the bottom two hexagon head machine screws with the THINNER washers, ensuring that they engage in the captive nuts on the brackets. Do not tighten these yet.
- 8 Fit the top two machine screws. Note that the screen is held by a small amount of tension and the brackets may have to be forced slightly to accommodate this. Once everything is in position, gradually tighten all the screws evenly until they are seated on the brackets.
- 9 Double check that everything is sufficiently tight and if so, fitting is now complete!

MAINTENANCE: No special maintenance is required. Do not use solvents to clean - just warm soapy water. Many proprietary glass cleaners are suitable for polycarbonate - check the label before trying.

IMPORTANT NOTICE: Whilst the screen provides a good level of impact protection, it is not warranted unbreakable. It is NOT a substitute for eye protection, which should be worn at all times while riding.