


## **ASSEMBLY INSTRUCTIONS**

Follow the steps below to assemble your Inkegnito. You are one step closer to a glass of something great.

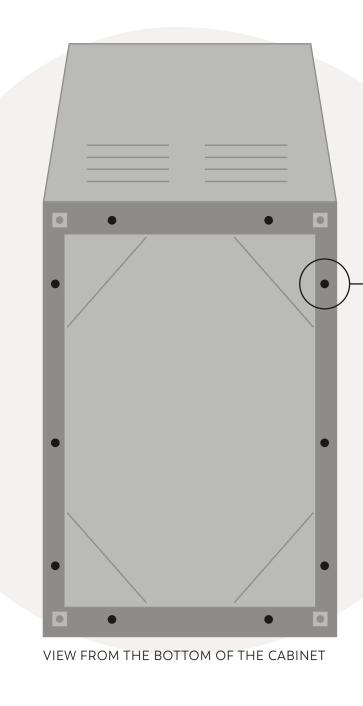



S T E P

If the base is not pre-installed, attach the base to the bottom of the cabinet using the included screws.

INCLUDED: 10 screws total, 2" long

Install the cabinet pulls into the pre-drilled holes using the included screws

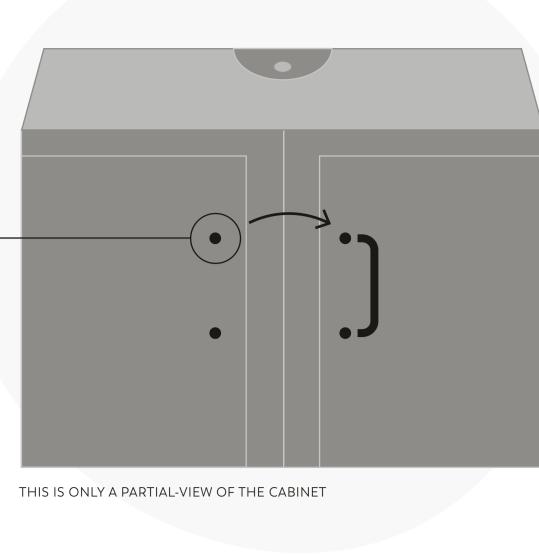

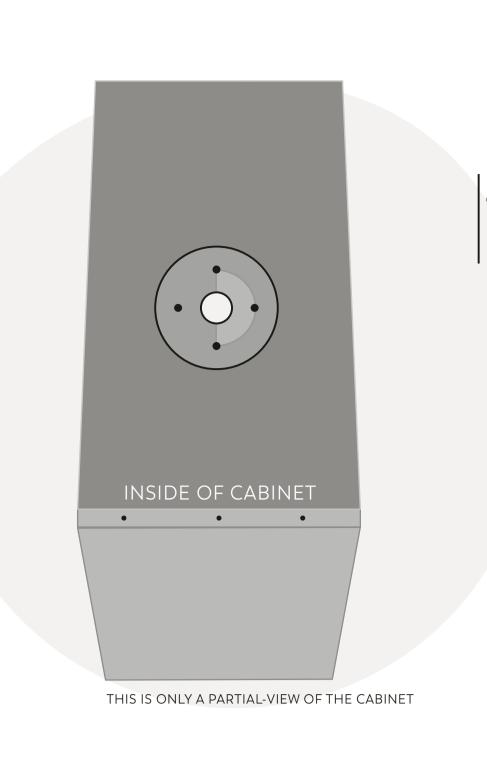


Install the aluminum tube by


screwing it into the flange.

The threads on the tube will

Attach the aluminum flange (the metal ring of steel that will connect to the pipe in step 4) to the underside of cabinet. The top of the flange will fit snugly in the hole of the cabinet. Secure the flange in place using the four wood screws. TIP: Make sure the half-moon cutout is facing up and to the right

**COMPLETED** 



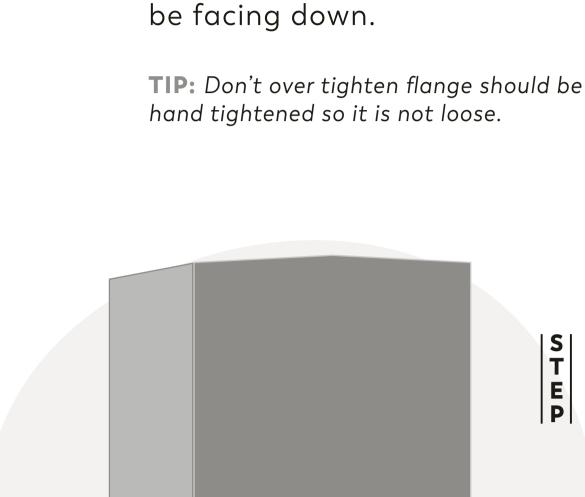


Unpack kegerator and remove all packing material.

of the kegerator

TIP: Be sure to remove plastic cap inserted on the top


TOP OF CABINET


THIS IS ONLY A PARTIAL-VIEW OF THE CABINET

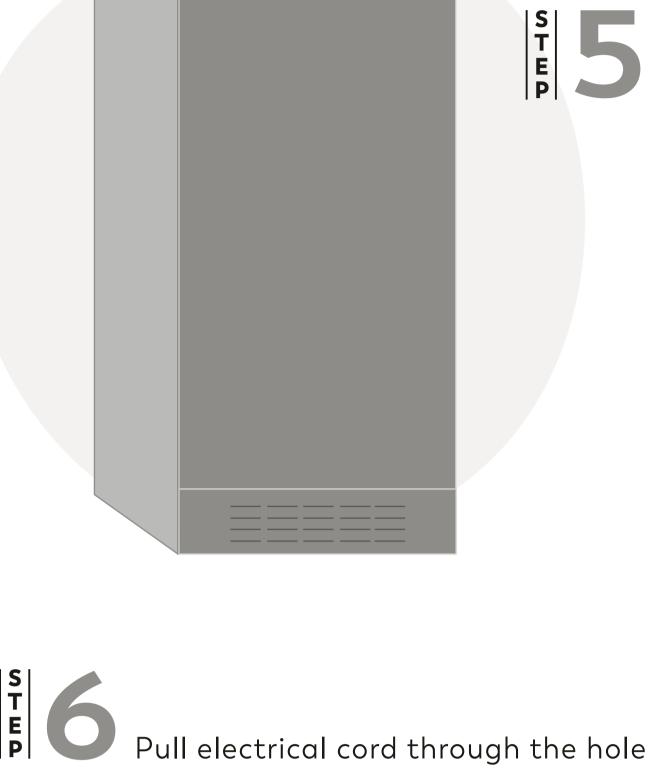


in bottom of cabinet

STEP

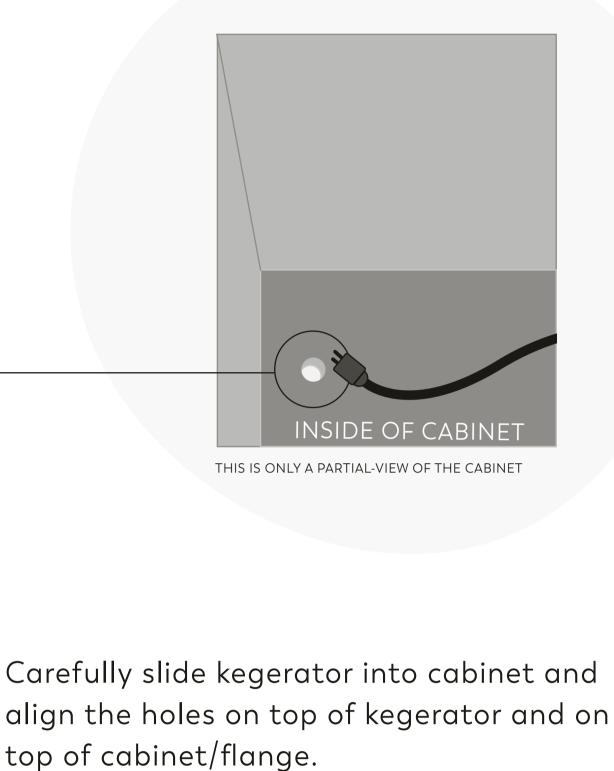

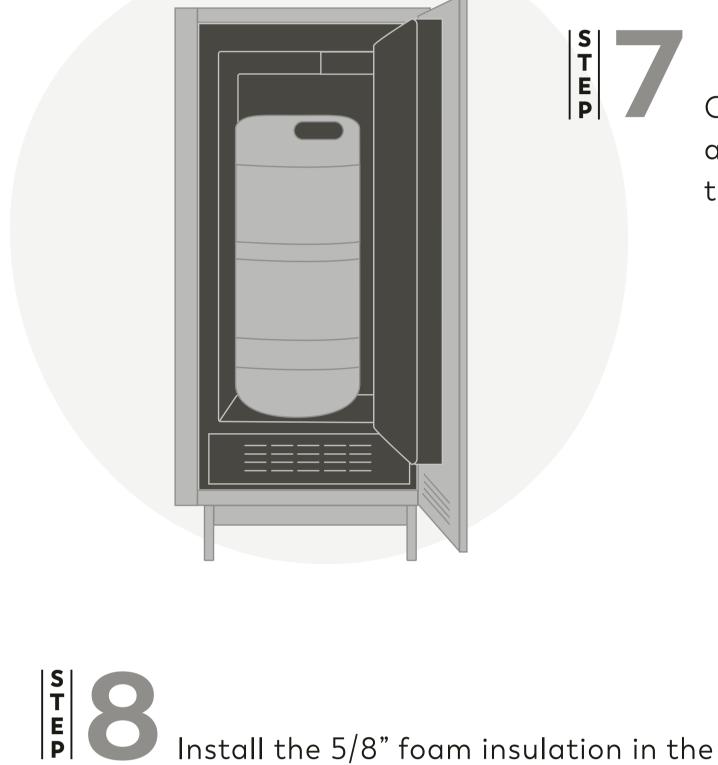

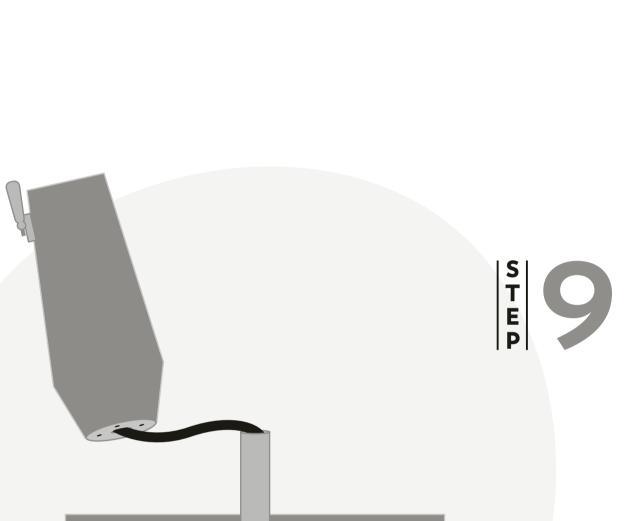

the half moon on the flange,

tap can rotate. It can also

the forward or backward

facing directions


determine what direction your


prevent rotation by locking in

gap between the top of fridge and

inside the cabinet.

the underside of the aluminum flange

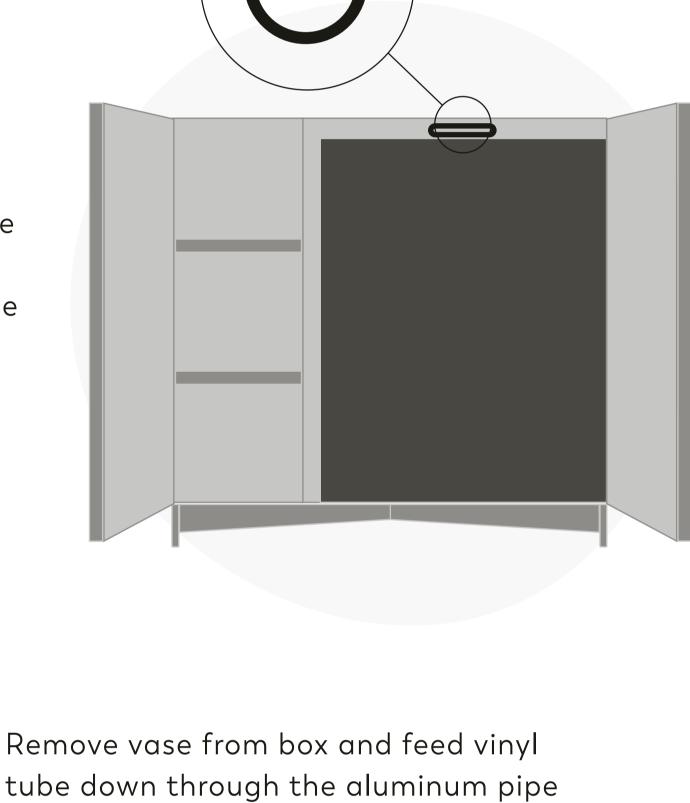

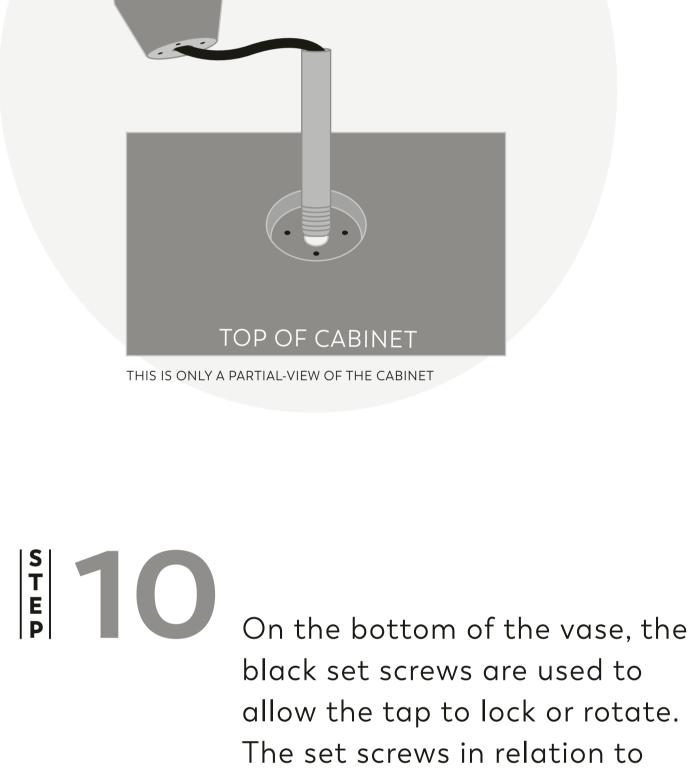

1 INSTALLED =

180 ° ROTATION

2 INSTALLED =

LOCKED FORWARD

OR BACKWARD

NONE =

**FREE TO** 

**ROTATE 360°** 

into the kegerator



S T E P


**ADAPTER NUT** 

**WRENCH** 

Lower the tap tower on to the

aluminum tube and line up your

set screws with the half moon.

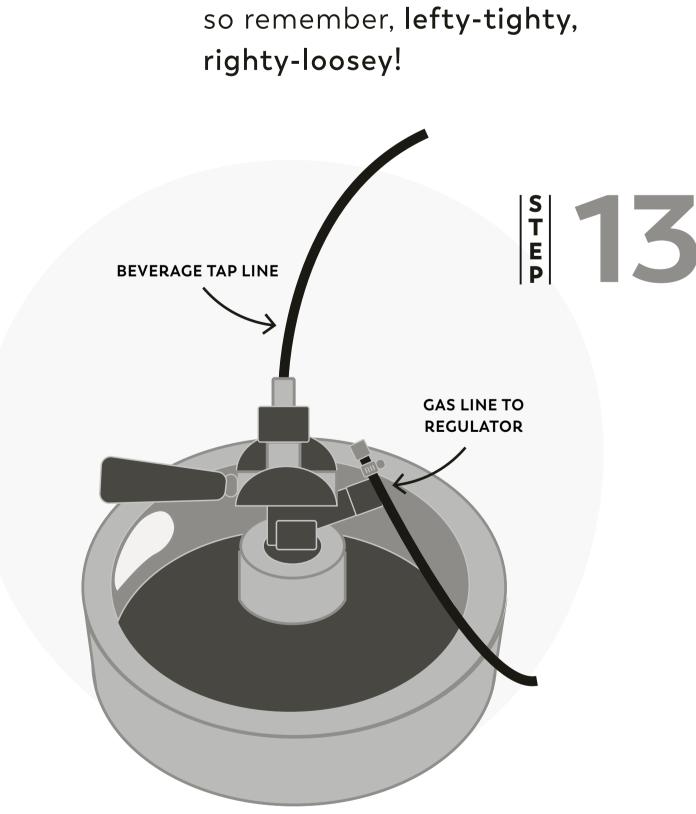

Using one hand to firmly hold the

tap in place, align the nubs on the

adapter nut and tighten futher.

overtighten such that the round

TIP: These are reverse-threaded


wrench with the hole of the

Obtaining a tight fit will seal

against leaks, but don't

nut begins to deform.

Slide the hose clamps over both lines. Connect 3/8" clear vinyl beverage line to the top of the keg coupling. Then connect the colored (red or blue) gas line to the side of the coupling. Secure in place with hose clamps. TIP: Soak the lines in hot water for 60 seconds before you connect the lines to make them more pliable and easier to install on the barbed fittings of the coupling

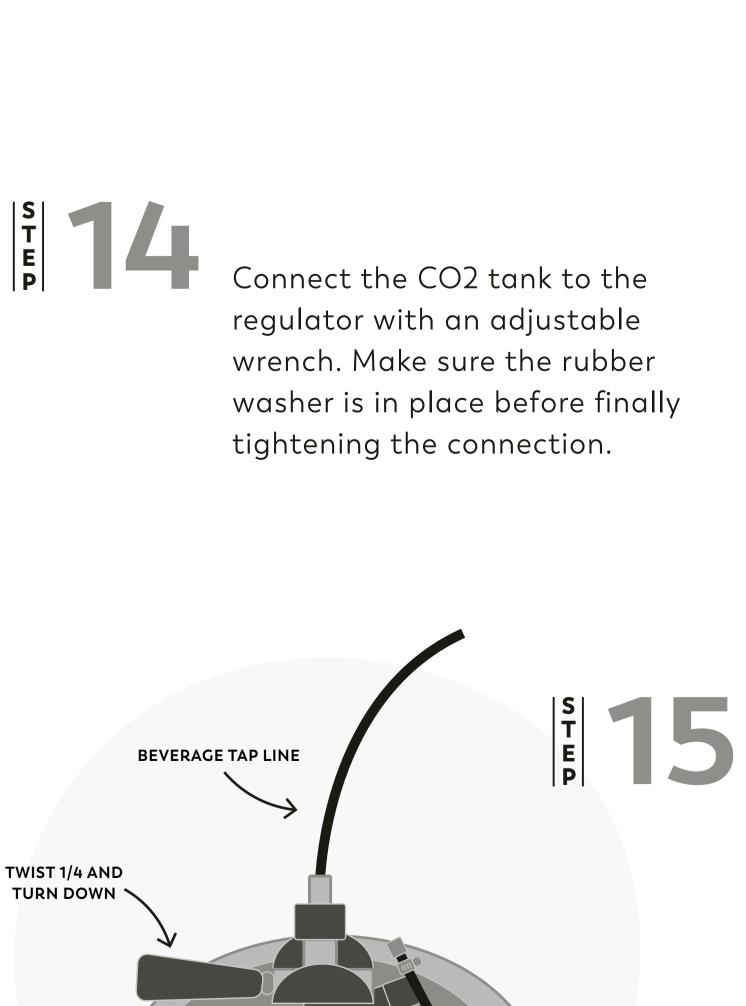

Make sure the faucet is closed


(handle pushed back) before

To tap the keg, twist the

coupling down into the keg,

tapping the keg.

¼ turn to connect it, and press the lever down to lock the coupling in place.

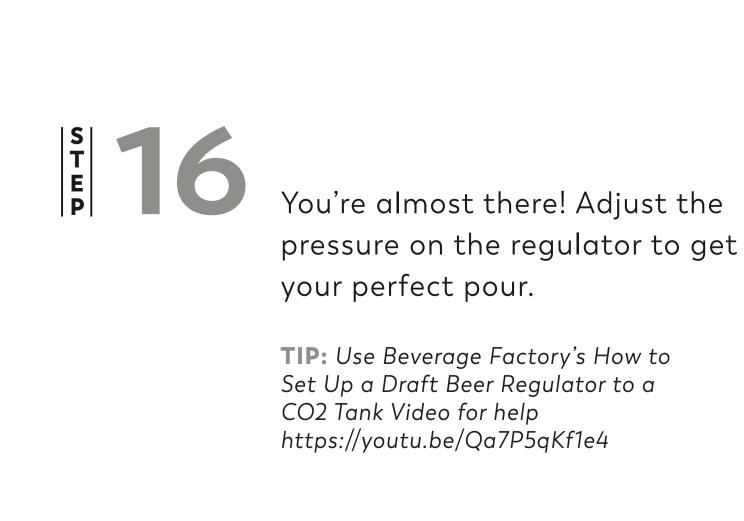

**ADJUST PRESSURE TO GET YOUR** PERFECT POUR



GRAB A GLASS + POUR SOMETHING GOOD Show us how you Inkegnito™ snap a photo of your masterpiece and share it #goinkegnito

