




**CORTEC**  
CORPORATION

Environmentally Safe VpCI®/MCI® Technologies

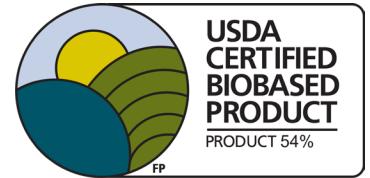

## BioCorr® HP

### DESCRIPTION

BioCorr® HP is a new generation of BioCorr®, Cortec's time-tested water-based and biobased rust preventative designed to preserve metals in storage and during transportation. BioCorr® HP has excellent emulsion stability, contains no chemicals that interfere with automatic transmission fluids, provides multi-metal protection, and is an excellent environmentally sound alternative to petroleum-derived products due to its biobased content. This ready-to-use formulation can protect for up to two years of indoor storage or during shipments when combined with VpCI® packaging materials. Unlike rust preventative oils, this product leaves a dry, virtually undetectable film on the metal surface. This feature helps to create a clean workplace and prevents material waste. The product uses a unique UV-marker technology for easier identification on the metal surface. BioCorr® HP Rust Preventative is a USDA Certified Biobased Product.

### PACKAGING & STORAGE

BioCorr® HP is packaged in 5 gallon (19 L) pails, 55 gallon (208 L) drums, liquid totes, and bulk.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 2 years

### VpCI® METALWORKING PRODUCTS



### FEATURES

- Ready-to-use product
- Does not contain chemicals that interfere with automatic transmission fluids
- Replaces hazardous mineral oils and flammable solvents
- Contains no chlorinated compounds, chromates, or nitrites
- Formulated with renewable raw materials
- Contains 54% USDA certified biobased content
- UV-marker technology
- Excellent shelf-life emulsion stability

### BENEFITS

- Provides excellent multi-metal corrosion protection
- Displaces water and oil from metal surfaces
- Forms an invisible dry-to-touch film
- Improves work environment by the absence of odors
- Streamlines processes by not requiring removal in most cases

### APPLICATION

BioCorr® HP is a ready-to-use product and can be applied by dipping or spraying. Agitate before each use. If desired, use a UV light to detect the product on the surface after application. BioCorr® HP SC is supplied as a concentrate and must be diluted and thoroughly mixed prior to use. SC version does not contain UV marker technology.

BioCorr® HP can be used as a temporary rust preventative for storage and shipment of metal parts such as

- Automotive components (specifically designed for use with transmissions)
- Pipes, flanges, and gears
- Sheets, coils, and castings

BioCorr® HP should be applied at ambient temperatures of 32-122 °F (0-50 °C).

# BioCorr® HP

## TYPICAL PROPERTIES

BioCorr® HP	
Appearance	Milky White Liquid
pH	9.06 ± 0.3 (neat)
Density	8.3-8.4 lb/gal (1.00-1.01 kg/L)

BioCorr® HP SC	
Appearance	Yellow to Amber
Density	8.0 lb/gal (0.96 kg/L)

## TEST RESULTS

Test Name	Standard Test	Results
Humidity Cabinet	ASTM D1748	600h
Cast Iron Chip Test <sup>a</sup>	ASTM D4627	Pass
Half-Immersion <sup>b</sup>	Copper	Pass
	Aluminum	Pass
	Galvanized (el) <sup>c</sup>	Pass
	Galvanized (hot) <sup>d</sup>	Pass

<sup>a</sup>The SC formula was used to prepare a solution for testing

<sup>b</sup>Testing temperature: 104 °F (40 °C); test duration: 200h

<sup>c</sup>Electroplated galvanized steel

<sup>d</sup>Hot-dipped galvanized steel

### LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

**BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.** No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA  
 Phone (651) 429-1100, Fax (651) 429-1122  
 Toll Free (800) 4-CORTEC  
 info@cortecvci.com  
<https://www.cortecvci.com>  
<https://www.cortecmetalworking.com>

Revised: 04/20/21 . Supersedes: N/A. ©Cortec Corporation 2002-2021 of Cortec® Corporation. All Rights Reserved. Copying and/or manipulation of these materials in any form without the written authorization of Cortec® Corporation is strictly prohibited. 2021, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.

Distributed by:



**Valdamark Limited**  
 Unit 13,  
 30 The Downs  
 Altrincham, Cheshire, WP14 2PX,  
 United Kingdom.  
[valdamark@live.com](mailto:valdamark@live.com)  
 Tel: +44 (0) 161 706 0388

