

Boiler Iguana™



DESCRIPTION

Boiler Iguana™ is a ready-to-use waterborne corrosion inhibitor for use in operating hot water systems or wet layup of standby boilers. Its combination of contact and Vapor phase Corrosion Inhibitors protects multi-metal surfaces below and above the water level. Boiler Iguana™ is easy to apply and does not require frequent monitoring—unlike traditional layup strategies that require maintenance of high pH and regular testing of oxygen scavenger levels. Boiler Iguana™ allows quick startup because it is compatible with other water treatment chemicals and there is no need to drain the boiler before bringing it back online.


PACKAGING & STORAGE

Boiler Iguana™ is available in 5-gallon (19 L) pails, 55-gallon (208 L) drums, liquid totes, and bulk.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 2 years

VpCI® ADDITIVES FOR WATER TREATMENT

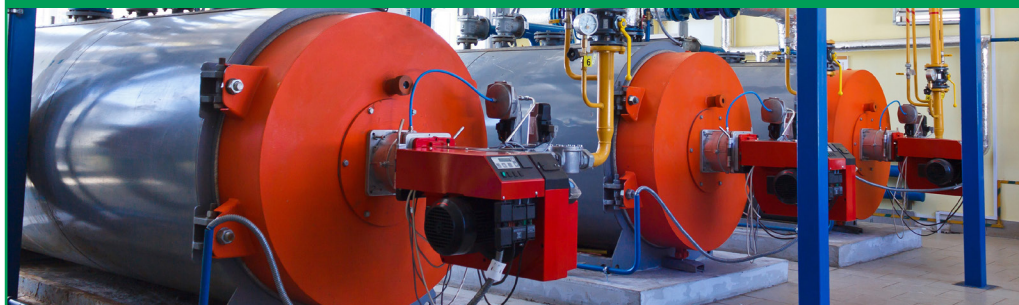

FEATURES

- Contact and vapor-phase corrosion protection
- Does not contain sulfites, silicates, phosphates, or nitrites
- Does not contain EPA or OSHA hazard components
- Effective with systems operating up to 302 °F (150 °C)
- Contains a triazole tracer

BENEFITS

- Easy to use
- Eliminates frequent monitoring
- No need to drain before bringing boiler back online
- Protects metals below and above water level

METALS PROTECTED

- Carbon Steel
- Cast Iron
- Copper
- Brass
- Solder
- Aluminum

TYPICAL PROPERTIES

Appearance	Clear Yellow Liquid
Density	9.2-9.3 lb/gal (1.10-1.11 kg/L)
pH	8.8-9.3 (1% solution)
Odor	Amine-like

Boiler Iguana™

APPLICATION

For Hot Closed Loops or Non-Steaming Boiler systems, maintain 2,000 ppm of Boiler Iguana™ in the circulating water. For wet layup, add Boiler Iguana™ to feedwater and/or condensate system and pump to the boiler. Shut the system down for layup or maintain low fire for standby, keeping the boiler at high-water level for up to 12 months of protection. Recommended dosage is 2,000 ppm. For standby boilers, monitor product concentration periodically to maintain effective dose as water is lost. Contact Cortec® Technical Services for details.

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Distributed by:



Valdamark Limited

Unit 13,
30 The Downs
Altrincham, Cheshire, WP14 2PX,
United Kingdom.
valdamark@live.com
Tel: +44 (0) 161 706 0388



4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC
info@cortecvci.com
<https://www.cortecvci.com>
<https://www.cortecwatertreatment.com>

Revised: 08/25/20. Supersedes: N/A. ©Cortec Corporation 2002-2020 of Cortec® Corporation. All Rights Reserved. Copying and/or manipulation of these materials in any form without the written authorization of Cortec® Corporation is strictly prohibited. 2020, ©Cortec® Corp. ISO accreditation applies to Cortec's processes only.

