


ATION  
USA  
FILM  
HIBITOR-PATENT  
INHIBITOR



# HIGH PERFORMANCE VpCI® PACKAGING

## CorrLam® LD VpCI® Barrier Laminate

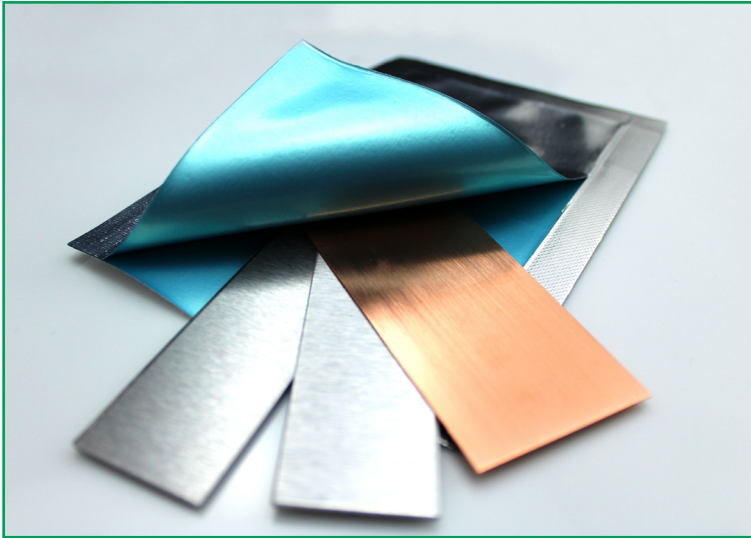

### DESCRIPTION

This unique structure consists of a clear polyester extrusion coating laminated to a 0.285 mil aluminum foil, which is laminated to a 4-mil Cortec® VpCI®-126 film. Total caliper is 7.3 mils (182.5 microns). This multilayered high performance laminated structure was developed to meet the toughest industrial requirements, and provide an excellent barrier to water vapor, gas, ultraviolet light, and odor. The barrier layer (foil) prevents the VpCI® molecular vapor from escaping the package thereby trapping the protective chemistry within.

CorrLam® LD VpCI® Barrier Laminate prevents corrosion on metal parts, extends product shelf life, and provides long-term preservation.

### TYPICAL APPLICATIONS

- For export packaging, highly sensitive domestic packaging and/or long-term preservation.
- CorrLam® is designed for the exceptional protection of moisture-sensitive and oxygen-sensitive metal parts
- Ideal for vacuum packaging
- Utilized for fabrication of large format equipment covers and small parts pouches

### FEATURES

- Protects ferrous and nonferrous metals
- Utilizes Vapor phase Corrosion Inhibitor (VpCI®) technology
- Eliminates the need for desiccants while providing complete corrosion protection
- Flexible, heat-sealable (vacuum sealable)
- High barrier block to water vapors, oxygen, and carbon dioxide
- Excellent mechanical properties
- Water Vapor Transmission Rate (WVTR) and O<sub>2</sub> Transmission Rate (OTR) are less than 0.0006g/100 in<sup>2</sup> per day
- High degree of puncture and tear resistance
- Material may also be fitted with a one-way vacuum valve, for removal of harmful moisture vapor and other gases from the interior of an enclosure or package

### TEST METHODS

Property	Test Method	Value
Basis Weight (lb/3000 ft <sup>2</sup> )	TAPPI	108.54
Yield (in <sup>2</sup> /lb)	Calculated	3776
Caliper (mil)	TAPPI T414	7.3
Tensile Strength (psi)	TAPPI T949	30.46(MDI) 29.89 (TDI)
Elmendorf tear (g)	TAPPI T414	232 (MD) 317 (TD)
Puncture Resistance (lb)	FED STD 101	14.1
Heat Seal Strength, lb/in width (350° F, 40 psi, 1.5 sec dwell)	ASTM F88	16.67
Water Vapor Transmission Rate, (g/100 in <sup>2</sup> /24 hours) (73° F, 90% R. H.)	TAPPI T557	<0.0006
Oxygen Transmission Rate (cc/100 in 2/24 hours) (73° F, 0% R. H.)	ASTM D3985	<0.0003



## PACKAGING AND STORAGE

Available in custom sizes such as pouches, covers, blankets etc. Contact Cortec® Corporation for more information. Store in a cool, dry place until ready for use. The shelf life for CorrLam® LD VpCI® Barrier Laminate material and converted products is one year.

**FOR INDUSTRIAL USE ONLY  
KEEP OUT OF REACH OF CHILDREN  
KEEP CONTAINER TIGHTLY CLOSED  
NOT FOR INTERNAL CONSUMPTION**

### LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.  
BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA  
Phone (651) 429-1100, Fax (651) 429-1122  
Toll Free (800) 4-CORTEC, E-mail [info@cortecvci.com](mailto:info@cortecvci.com)  
<http://www.cortecvci.com>

Printed on recycled paper  100% post consumer

Revised: 07/13/17. Supersedes: 05/15/17. ©Cortec Corporation 2002-2017 of Cortec Corporation. All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited. 2017, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.

Distributed by:



**Valdamark Limited**  
Unit 13,  
30 The Downs  
Altrincham, Cheshire, WP14 2PX,  
United Kingdom.  
[valdamark@live.com](mailto:valdamark@live.com)  
Tel: +44 (0) 161 706 0388

