



CORTEC
CORPORATION

Environmentally Safe VpCI®/MCI® Technologies

EcoSonic® ESD Stretch Film powered by Nano VpCI®

DESCRIPTION

EcoSonic® ESD Stretch Film meets the anti-static requirements under MIL-PRF-81705 E in the form of a high performance stretch film with multi-metal corrosion inhibitors and ESD protection!

The poor electrical conductivity of plastic film requires special attention in packaging applications where static discharges are unacceptable. Pressure and friction during stretch-wrapping applications will produce static discharges. These can be quite significant and cannot be dissipated by grounding.

Cortec® Laboratories has developed this specialty film for electronics, munitions, fertilizers, and any industrial applications where static discharge could result in dangerous packaging conditions.

Meets NACE TM0208-2018 standard for corrosion protection.


PACKAGING & STORAGE

Available in 12" (30.5 cm), 15" (38 cm), 18" (45.75 cm), and 20" (50 cm) widths in the following thicknesses: 1.0 mil (25 µm) or 1.5 mil (38 µm). All sizes made to order. Contact Cortec® Customer Service for custom requirements and lead times.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 1 year

HIGH PERFORMANCE VpCI® PACKAGING

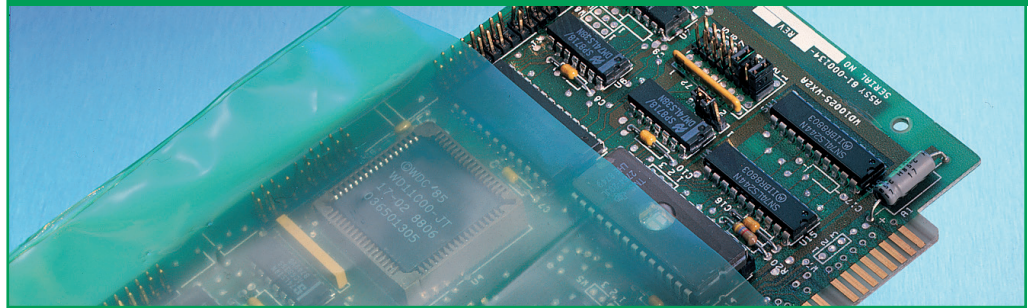

FEATURES

- Dissipates static discharges
- Vapor phase Corrosion Inhibiting Technology
- High-performance stretch film
- Acceptable in harsh environments
- See-through packaging
- Cost-effective system
- LLDPE #2 plastic
- Non-hazardous
- Multi-functional protection

BENEFITS

- Meets static decay requirements per MIL-PRF-81705 E
- Provides multi-metal corrosion protection
- Eliminates normal stretch film static
- Eliminates costly barrier packaging
- Fully recyclable in applicable facilities
- Safe to handle and apply
- Does not interfere with electrical, optical, or mechanical surface properties

METALS PROTECTED

- Aluminum
- Galvanized Steel
- Carbon Steel
- Silicon Steel
- Stainless Steel
- Copper
- Brass
- Cast Iron

EcoSonic® ESD Stretch Film powered by Nano VpCI®

APPLICATIONS

PERFORMANCE

ESD properties conform to MIL-PRF-81705 E:

- Surface resistivity between 10^5 and $10^{12} \Omega$
- Static decay rate <2 sec


TECHNICAL PROPERTIES

Property		Test Method	Units	Typical Values*
Caliper		ASTM D6988	mil (μm)	1.50 (38)
Breaking Factor	MD	ASTM D882-02	lbs/in (N/m)	5.92 (1030)
	CD			4.41 (769)
Tensile Strength at Break	MD	ASTM D882-02	psi (kPa)	3893 (26840)
	CD			3535 (24370)
Elongation at Break	MD	ASTM D882-02	%	553.73
	CD			632.37
Yield Strength	MD	ASTM D882-02	psi (kPa)	1817.40 (12531)
	CD			1163.96 (8022.22)
Tear Strength	MD	ASTM D1922-06a	mN	4432
	CD			4393
Dart Drop Impact Resistance		ASTM D1709-04 Test Method A	grams	458.20
Puncture Resistance	Outside	MIL-STD-3010, TM 2065	lbf (N)	3.20 (14.2)
	Inside			5.20 (23.1)

*Typical values represent average laboratory values and are intended as guides only, not as specifications

EcoSonic® ESD Stretch Film can be used on standard manual and automatic stretch wrapping equipment (hand wrapping recommended for 12" [30.5 cm] and 15" [38 cm] widths). It is ideal for packaging and unitizing of loads in any application that dictates the absence of electrical shock, such as the following:

- Computers and telecommunications equipment
- Laboratory instruments
- Electrical panels/components
- Marine, aerospace, and military instruments
- Medical devices sensitive to electrical interference
- Munitions
- Loads of gun powders and finished explosives
- Volatile products in controlled environments
- Loads in fertilizer plants where nitrites and nitrates are present

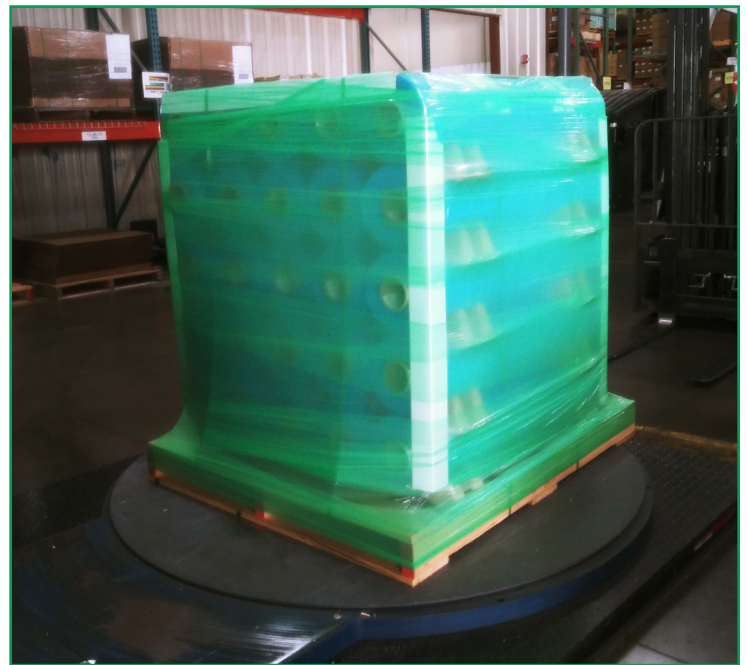

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA
 Phone (651) 429-1100, Fax (651) 429-1122
 Toll Free (800) 4-CORTEC
 productinfo@cortecvci.com
<https://www.cortecvci.com>
<https://www.cortecpackaging.com>



Distributed by



Valdamark Limited
 Unit 13,
 30 The Downs
 Altrincham, Cheshire, WP14 2PX,
 United Kingdom.
 valdamark@live.com
 Tel: +44 (0) 161 706 0388

