

SEASON COMFORT

Quinti®



Advanced direction armchair from Quinti collection with tubular structure in chromed metal.

Base

Three bases are available:

1. In aluminum 670 mm, "Loop" type or black painted
2. Cantilever structure, chromed or black sled base
3. 'Star' Base 4 spokes on feet.

Casters

Double tread diam 60 mm, standard or rubberized, both can be free [standard] or self-braking. The feet in polyamide are interchangeable to the casters with the same locking pin at the base.

Elevation

All Quinti's gas columns are in accordance with the DIN 4550 norm and they exceed the fourth level.

Mechanics

M5 the standard configuration of the chair supposes a tilt single lever mechanism with gas command, height and block in operative position. It has a wheel for the variation of the tilt rigidity. The main body is entirely made out of die-cast aluminum.

M4 /M3 the point of rotation of this mechanism is advanced. The blocking lever allows the blocking process in 3 positions with a backstop system of the seat. It has a wheel for the variation of the tilting rigidity. The main body is entirely made out of shiny or black die-cast aluminum.

3. **M10** [optional] Harmonic mechanism, which guarantees a permanent tilt of the seat and gas elevation.

4. **M8/ M8F** swivel plate with or without base elevation

Armrests

Couplet of armrests in chromed or black metal.

It is possible to apply a cover for the armrests as accessory.



Seat & Backrest

Seat and backrest are made up of a monocoque in chromed square tubular 25x25, inside this a self-supporting structure is integrated through two steel tie-rods.


Both in the high and short version it is available with standard dimensions and XL.

Upholsters

The upholsters have a density of 60, with a 4 cm cover thickness and applied with Velcro on a soft 1,3 mm thick Eurolene support.

SEASON COMFORT

DIMENSIONS

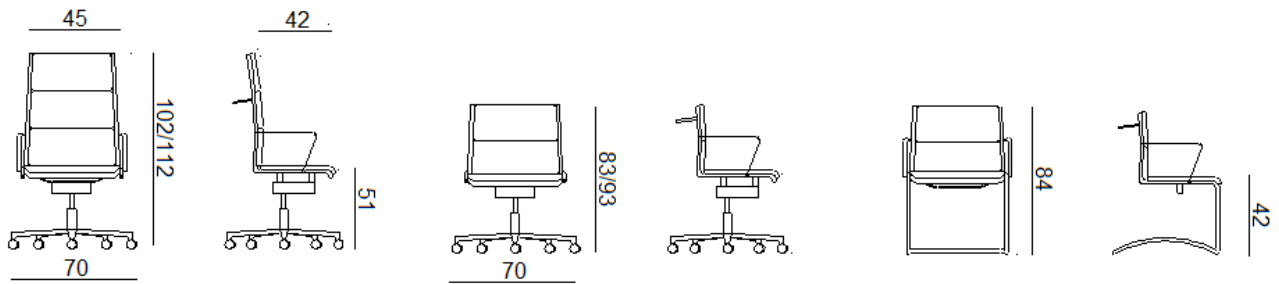

SEASON COMFORT

UPHOLSTERY

BIO-EXPO**CATEGORY 2**

300 gr/mt2
100% Propitex FR bacteriostatic
Class 1 UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

EXTREME**CATEGORY 2**

350 gr/mtl
100% Xtreme FR
Class 1 , EN 1021-1/2
100.000 +/- 10% cycles Martindale

LASER**CATEGORY 2**

560 gr/mtl
100% Polyester FR
Class 1
80.000 +/- 10% cycles Martindale

ECOPELLE**CATEGORY 2**

630 gr/mt2
83% PVC, 17% Synthetic
ISO 379-DIN75200-CSERF4/83 10%
cycles Martindale

ERA**CATEGORY 3**

448 gr/mtl
100% Trevira CS
Class 1 UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

LASER PLUS**CATEGORY 3**

630 gr/mtl
100% Polyester FR Trevira
Classe1 , 4.000 +/- cycles Martindale

ECOPELLE SOUL**CATEGORY 3**

760 gr/mt2
Superficies 100% POLIURETANO,
Base Polyester 85%,17% Cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

MELANGE**CATEGORY 3**

390 g/lin.m
100% Trevira CS
Class 1
80.000 +/- 10% cycles Martindale

JET**CATEGORY 3**

365 +/- 5% g/lin.m
100% Polyester FR
Class 1
80.000 +/- 10% cycles Martindale

ECOPELLE SISTEMA PRO**CATEGORY 3**

710 gr/mt2
Surface 93% PVC
Base Polyester 28%
CLASSE1
100.000 CICLI

ECOPELLE VITAX**CATEGORY 3**

850 gr/mt2
Surface 98% PVC 2% PU
Base cotton 100%
CLASSE 1
100.000 CICLI

ONE RECICLE**CATEGORY 3**

525 gr/mt2
100% recycled polyester
Base cotton 100%
CLASSE 1IM
100.000 CICLI

LANA**CATEGORY 5**

500 gr/mt2
75% Lana, 25% polyamide
Class 1
100.000 cycles Martindale

PELLE**CATEGORY 5/6**

620 g/lin.m
100% Cow leather
Class 1, EN 1021-1/2

PIED POULE**CATEGORY 6**

550 g/lin.m
66% cotton, 34% Polyester
35.000 % cycles Martindale

EUROPOST 2**CATEGORY 6**

710 g/lin.m
63% PU, 16% CO, 21% PL
Ini1975 CLASS1emme,UNI9175/FA
50.000% cycles Martindale

PREMIUM /ELEGANCE**CATEGORY 7**

100% First quality cow leather
Thickness 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO**CATEGORY 7**

770 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

REMIX**CATEGORY 7**

415 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

VELLUTO DECONTRACTE'**CATEGORY 7**

590 g/lin.m
19% CO, 61% PC, 10% PL, 10%VI
40.000 % cycles Martindale

MERIT**CATEGORY 7**

500g/lin.m
76% Polyester Recycled
24% Polyester
EN 1021-1/2
85.000 % cycles Martindale

VELLUTO**CATEGORY 8**

600 g/lin.m
100.000 % PL Flame retardant

PELLE SOFT**CATEGORY 8**

100% Cow leather Thickness,8-2 mm
Aniline treatment – First quality
EN1021-1/2

SEASON COMFORT

USAGE AND CARE

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

LEATHERS

Cleaning: clean with a white wet cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore, it is recommended to pay particular attention while using.

WOODS

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

METALS

Cleaning: both steel or aluminum surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.