


Solar Hot Water System Schematic – Standard Layout

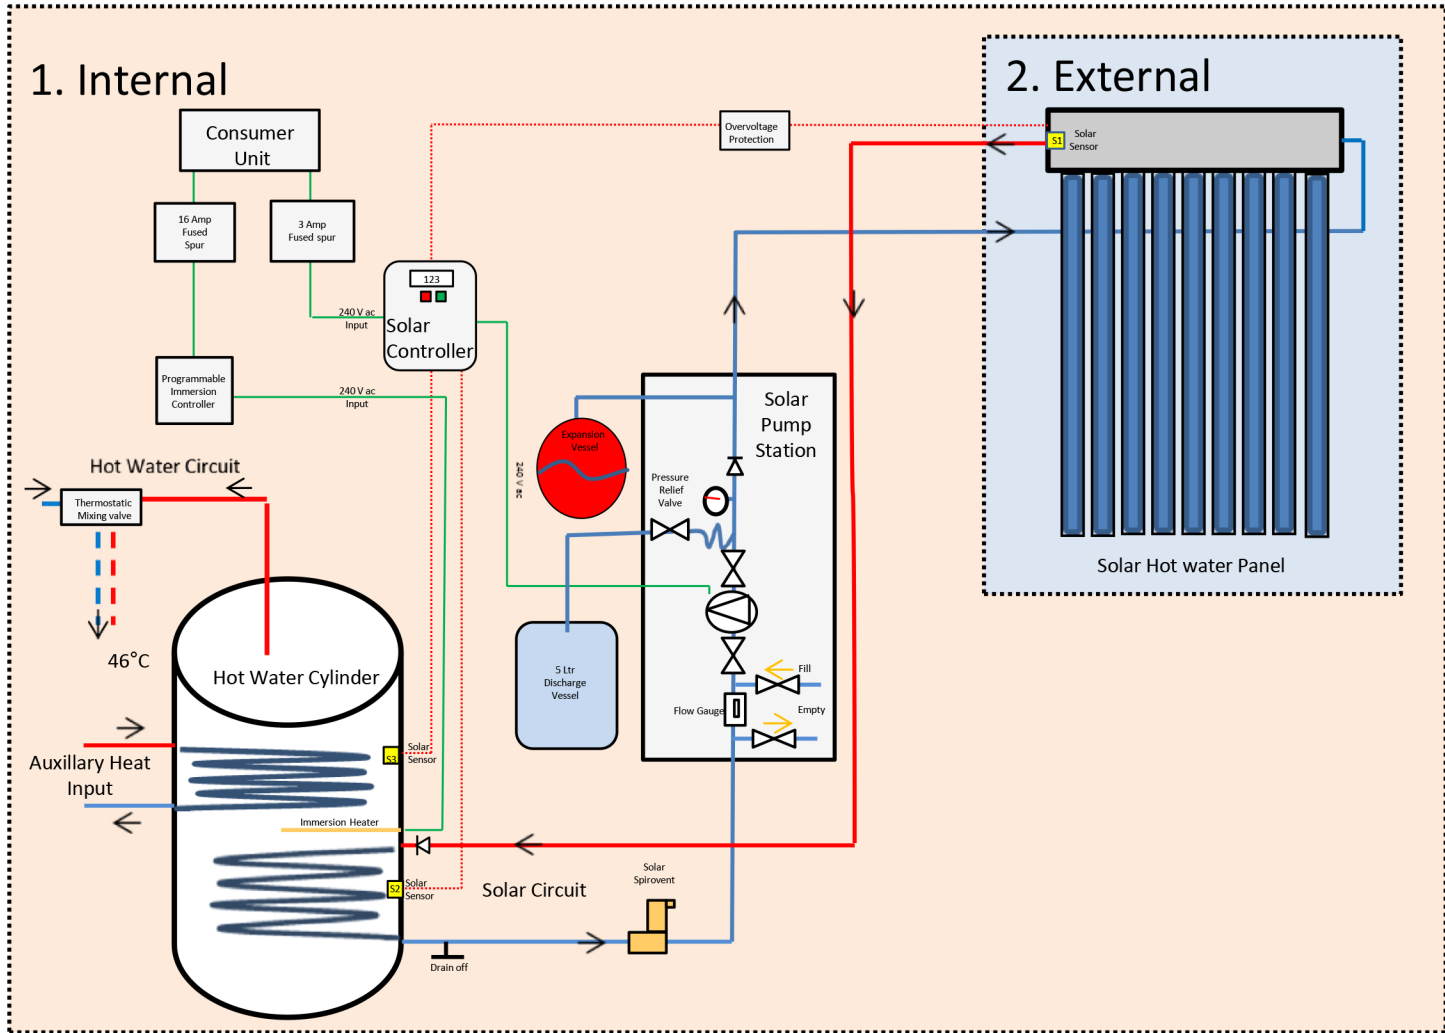

ANTI LEGIONELLA CONTROL

Method 1 - The Solar thermal controller has an anti legionella program built and is set to keep transferring heat into the cylinder until the 60 °C temperature has been achieved.

Method 2 - The Immersion heater has a programmable timer installed in the circuit to raise the temperature to 60°C every 5 days.