



## Self-contained ice maker - Vertical evaporator system Daily production up to 120 kg

Hotel	█	█	█	█	█	█	█	█	█	█	█
Restaurant	█	█	█	█	█	█	█	█	█	█	█
Fast food	█	█	█	█	█	█	█	█	█	█	█
Bar	█	█	█	█	█	█	█	█	█	█	█
Disco	█	█	█	█	█	█	█	█	█	█	█
Fish market	█	█	█	█	█	█	█	█	█	█	█
Supermarket	█	█	█	█	█	█	█	█	█	█	█
Medical & SPA	█	█	█	█	█	█	█	█	█	█	█
Industry	█	█	█	█	█	█	█	█	█	█	█

### ► Position n°



### ► Features & Plus

- Single and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Cleanable antiscaling filter
- Air or water cooling system
- Easy cleanable internal rounded surface
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages



Single and crystal cube



AISI 304 SS Scotch Brite finish



Adjustable Stainless Steel feet



Removable and cleanable air filter




Cleanable antiscaling filter



Disappearing insulated door

### ► Available ice cube size



### ► Prod. 24h

Air temp.		Water temp.		kg	lbs
10° C	50° F	7° C	45° F	120	265
21° C	70° F	15° C	60° F	105	231

**2 Years Warranty**  
subject to limitations

### ► Certifications available for this model



We are Brema






Fast Ice

# VB 250



## Self-contained ice maker - Vertical evaporator system Daily production up to 120 kg

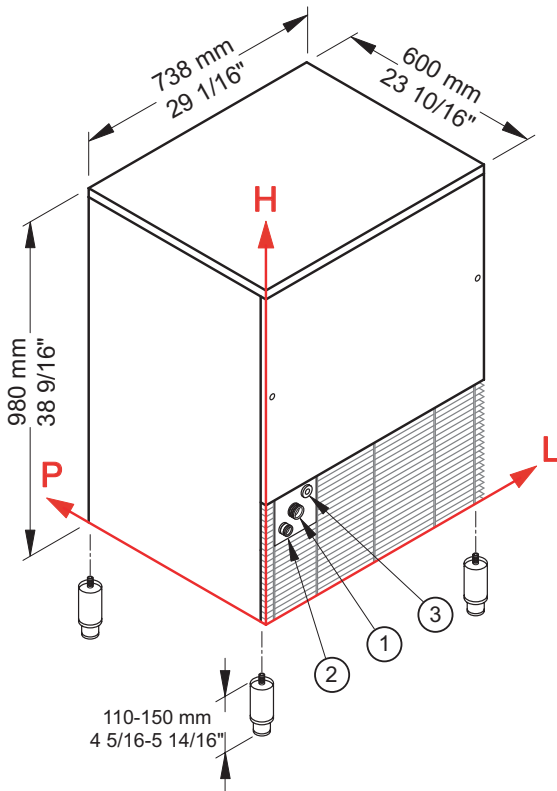

### ► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ► Performances

	Air temperature	Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
	10° C	120 kg					
	50° F		265 lbs				
	21° C			105 kg			
	70° F				231 lbs		
	32° C					90 kg	
	90° F						198 lbs

### ► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 116 mm / 4 9/16" - 245 mm / 9 10/16" - 3/4"      ② Water out.: 54 mm / 2 2/16" - 200 mm / 7 14/16" - 24 mm / 15/16"
- ③ Electrical connections: 161 mm / 6 5/16" - 281 mm / 11 1/16"

### ► Technical information

Production in 24h	105 kg / 231 lbs	Water consumption	A: 2,5 l/kg - 29,9 gal/100 lbs
Store capacity, up to	35 kg / 77 lbs		W: 14,2 l/kg - 170,2 gal/100 lbs
Cooling system	A - W	Sizes (L-P-H mm)	738 - 600 - 980
Kind of cube	7g	(L-P-H in)	29 1/16 - 23 10/16 - 38 9/16
Refrigerant	R452A	Sizes with pack (L-P-H mm)	780 - 640 - 1140
Standard voltage	220-240 V ~ 50 Hz	(L-P-H in)	30 11/16 - 25 3/16 - 44 14/16
Average power consumption	850 W	Net weight	75 kg / 165 lbs
Fuse	10 A	Gross weight	85 kg / 187 lbs
Finish	AISI 304 stainless steel, scotch brite		

All the technical information must be considered at the following conditions:

- Sizes without feet
- Standard Cube (7 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued March 2021



[www.bremaice.it](http://www.bremaice.it)  
info@bremaice.it

We are Brema

