

SRT-350[®]

GUARDRAIL



SRT-350®

The Slotted Rail Terminal (SRT-350®) is a gating, flared end terminal and is available in a 6-Post and 8-Post system. The SRT-350® Hinged Breakaway Posts (HBA®) 6-Post system, has 2 steel breakaway posts, 4 wood CRT posts, and is assembled in a straight-line flare. The 6-Post system also has steel breakaway posts that are potentially reusable when impacted within NCHRP Report 350 crash test standards.*

The SRT-350® 8-Post system has 2 tube sleeves/wood posts, 6 wood CRT posts, and installs on a parabolic flare. The parabolic flare has a “footprint” similar to the previously used BCTs and MELTs. Strategically located slots in the W-beam rail design helps to initiate controlled buckling.


ASSEMBLY AND MAINTENANCE

- 3', 3' 6", and 4' offset (915 mm, 1,070 mm, and 1,220 mm) help reduce installation costs.
- Two HBA® steel breakaway posts are potentially reusable when impacted within NCHRP Report 350 crash test standards.*
- Angle struts designed to help facilitate easier assembly.

SPECIFICATIONS

- Offset: 3', 3' 6", and 4' (915 mm, 1,070 mm, and 1,220 mm) SRT-350® 8 Post
- 4' (1,220 mm) SRT-350® 6 Post
- Length: 37' 6" (11.43 m)
- Length of Need: 12' 6" (3.81 m) from the Nose of the Terminal (at the 3rd Post)
- Parabolic or Straight Flare Options

SRT-350 6 POST (Straight-line flare)

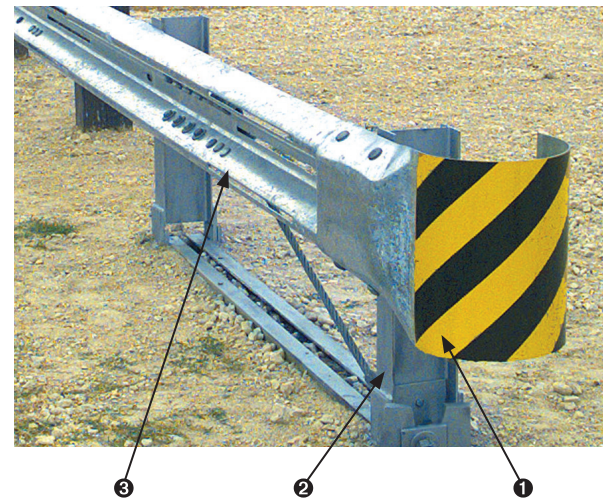

SRT-350 8 POST (Parabolic flare)



- 1 Nose
- 2 Post
- 3 Rails

DISTRIBUTED BY

