

# TRACC<sup>®</sup>

CRASH CUSHION



# TRACC®

The TRACC® is a redirective, non-gating, energy absorbing crash cushion tested to NCHRP Report 350 Test Level 3. It can be used for unidirectional or bidirectional applications.

The TRACC® family of crash cushions also includes the ShorTRACC™, a narrow cushion tested to NCHRP Report 350 Test Level 2; the FaSTRACC™, a narrow crash cushion tested to NCHRP Report 350 Test Level 3 up to 70 mph (113 km/h); and the WideTRACC™ available for various lengths, widths, and test levels (per design speed) can be configured for appropriate wide applications.

## FEATURES

- Galvanized all-steel construction designed for durability.
- Backup width options and wing extensions available with WideTRACC™.
- Designed to use fewer anchor bolts than comparable crash cushions.
- Tested to NCHRP Report 350 Test Level 3.

## ASSEMBLY AND MAINTENANCE


- Can be installed on new or existing concrete or asphalt pad.
- Open frame design helps facilitate installation, inspection, or repair.\*
- Units ship assembled. Can be shipped unassembled upon request.

## SPECIFICATIONS

- 21' 3" Long (6.5 m)
- 24" Wide (610 mm)
- 3,200 lbs. (1,451 kg)

## BACKUP STRUCTURE AND ATTACHMENTS

- Concrete barrier(s)
- Bridge parapet(s)
- Bridge pier(s)
- Square block(s)
- W-Beam
- Thrie-Beam

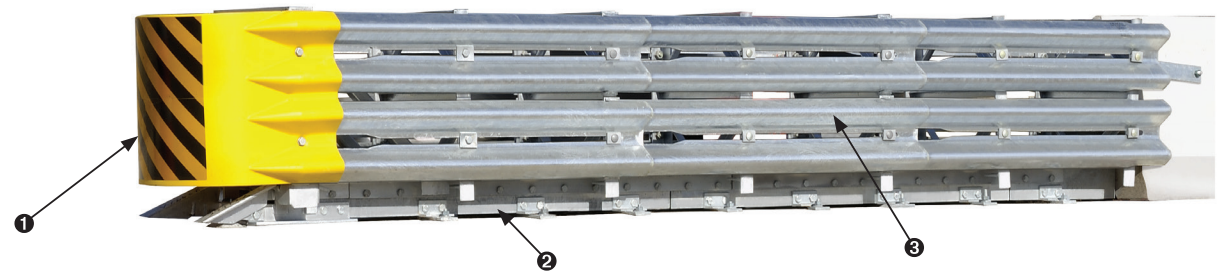

- ① Plastic Nose Piece
- ② Base with Rip Plates
- ③ Galvanized Steel Panel

DISTRIBUTED BY

