

Project:

Location: Item #:____

Quantity:

Model #:

MODEL: IDC-VAR15H

DISPLAY CASES – Gelato Curved Glass



General Strengths

- **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- Control systems. Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- Modular Line. Closed and open angles to adapt the elements to a determinated space. Designed for pastry, Viennese breads and bakery.

- 100% Tested. All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- Certified. Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- Lighting. Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Increases product visibility considerably.

| MODEL | Dimensions (inches) (mm) | | | Sides | Nº Pans | Ref. | Ref. Weight | Temp. Range | Capacity (Cu. Ft.) | Cond. Unit. | Case | Crated Weight |
|------------|-----------------------------|------|------|-------------|---------|-------|----------------|----------------|-----------------------|----------------|------------|------------------|
| | W | D | н | | | | (Lbs.) (gr.) | (ºF) (ºC) | (L) | H.P. | Amps | (Lbs.) (Kg.) |
| IDC-VAR15H | 61-1/2 | 45 | 52 | 1-5/8+1-5/8 | 16 | R404A | 1+1.2 | -2ºF/+5ºF | 3.95 | 1+1/2 | 6.1 (230V) | 796 |
| | 1562 | 1160 | 1320 | 40+40 | | | 450+550 | -18ºC/-15ºC | 112 | | 5.4 (115V) | 361 |

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp. 7042 N.W. 46th Street Miami, FL 33166 1.305.777.9599 Office 1.305.777.9598 Fax

www.infrico.us service@infrico.com sales@infrico.com

APPROVALS: AVAILABLE AT:

str Infrico

| Project: | | |
|-----------|-----------|--|
| Location: | | |
| Item #: | Quantity: | |
| Model # | | |

MODEL: IDC-VAR15H

DISPLAY CASES – Gelato Curved Glass

STANDARD FEATURES

> Exterior

- White compact quartz worktop,
- Lift-up curved tempered security glass system,
- Pull down night curtain on the back,
- ABS thermoformed decoration, White RAL 9016 or Black RAL 9017 standard decoration,
- Built-in casters and levelling feet.

> Interior

- AISI 304 Stainless Steel exhibition area,
- LED Lighting in the back and front,
- Case is compatible with standard 5 Liter Gelato Pans (14-1/8"x6-1/2"x5-7/8"), pans included.

OPTIONAL FEATURES

PLAN VIEW

- Customizable decoration for lower front and side panels,
- Optional decoration: Red RAL 3001, Blue RAL 5015, Orange RAL 2003, Pistachio RAL DESIGN 1107060,
- Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.


Refrigeration

- Digital temperature controller with automatic defrost system,
- Temperature display on front,
- Stainless steel evaporative pan,
- Forced air refrigeration system,
- Case engineered to operate at 75°F (25°C). and 55% relative humidity,
- Refrigeration capacity: 4060 Btu/h(-31ºF)/ 1190W(-35ºC).

Electrical

- Cord and NEMA L14-30P plug,
- Electrical connection are 230V (Compressor) and 115V (Digital Control) / 1ph / 60 Hz.

ETL Listed to UL471 Standard and Sanitation classified to NSF7.

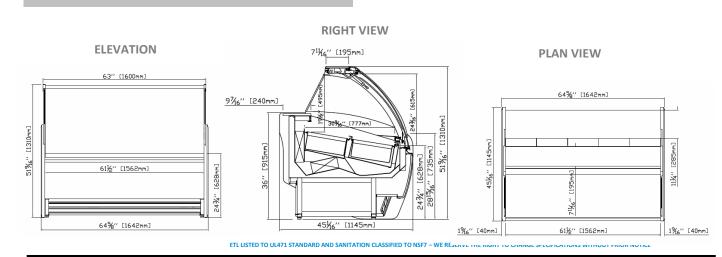



Infrico USA Corp. 7042 N.W. 46th Street Miami, FL 33166 1.305.777.9599 Office 1.305.777.9598 Fax www.infrico.us service@infrico.com sales@infrico.com APPROVALS: AVAILABLE AT: