


# DOWNRIGGER CABLE RELEASE CLIP - #1051

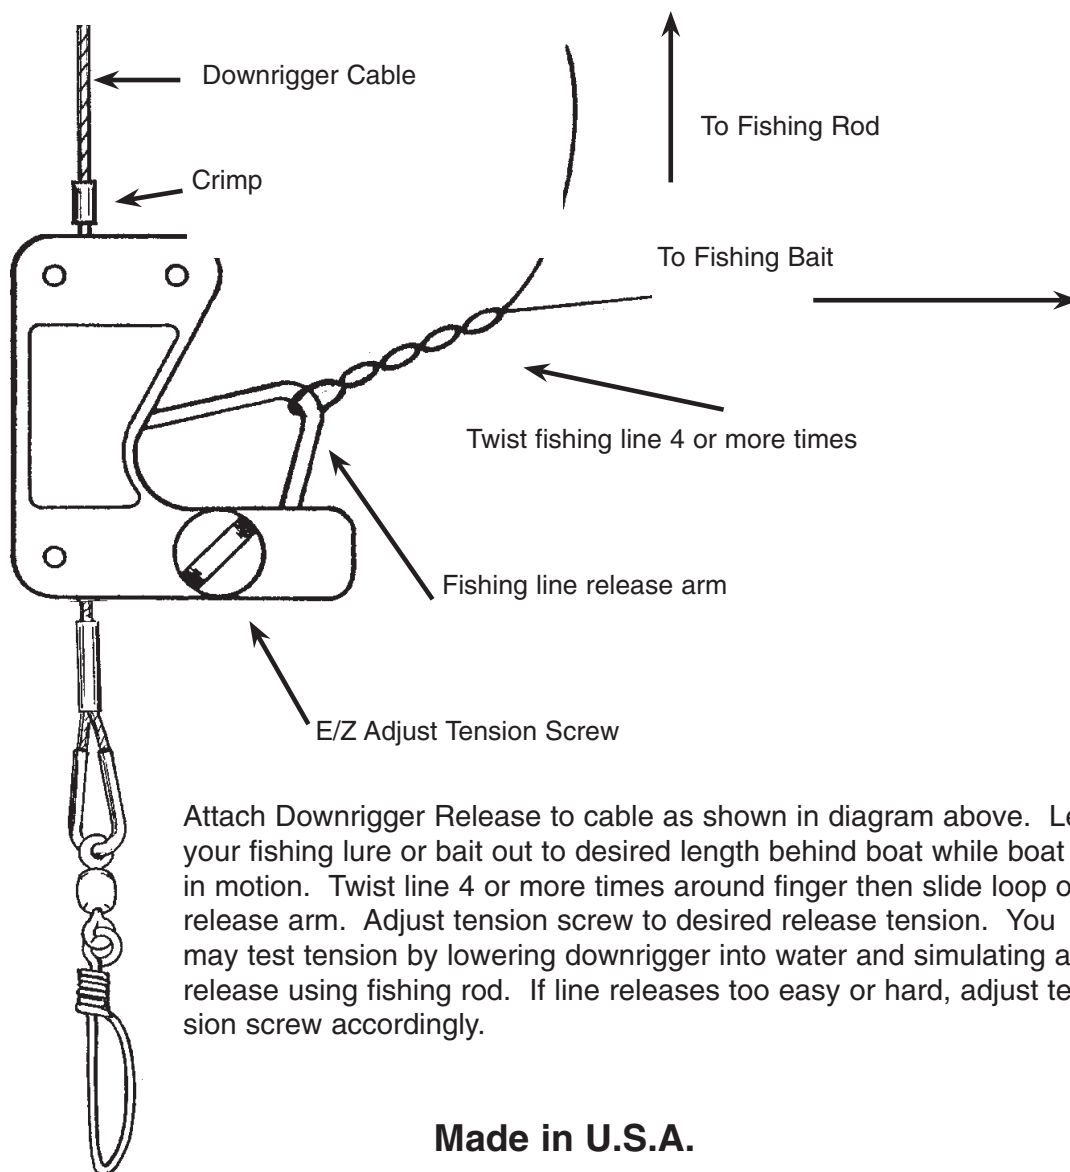

Attach Downrigger Release to cable as shown in diagram above. Let your fishing lure or bait out to desired length behind boat while boat is in motion. Twist line 4 or more times around finger then slide loop on release arm. Adjust tension screw to desired release tension. You may test tension by lowering downrigger into water and simulating a release using fishing rod. If line releases too easy or hard, adjust tension screw accordingly.

**Made in U.S.A.**