


COZY  SAFE<sup>®</sup>  
Without Compromise...

EVEREST

## INSTRUCTION MANUAL

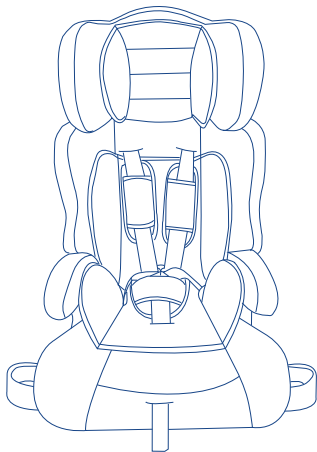

EST-215  
Group 1/2/3  
9kg to 36kg  
(Approximately 9 months - 11 years)

ECE R 16 No 44.04

## Cozy 'N' Safe Everest Group 1, 2, 3 Car Seat (9kg to 36kg /approx. 9 months to 11 Years )

Thank you for purchasing this Group 1, 2, 3 car seat. If you are not completely satisfied with the car seat or you would like to change any accessory or obtain any help about the car seat, you can contact our customer services department.

## Storage of the Instruction Manual

It is most important that these instructions remain with the car seat at all times.

The instruction manual can be stored in the allocated space on the side of the backrest.

Please read this instruction manual carefully before use.

## NOTICE

1. This is a “Universal” child restraint, it is approved to Regulation No 44, 04 series of amendments, for general use in vehicles and it will fit most, but not all car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a “Universal” child restraint for this age group.
3. This child restraint has been classified as “Universal” under more stringent conditions than those which applied to earlier designs which do not carry this notice
4. If in doubt, consult either the child restraint manufacturer or the retailer.

# SAFETY WARNINGS

COZY  SAFE

# EST-215 Car Seat

Do not install or use this child car seat until you carefully read the installation instructions provided by the car seat manufacturer.

This car seat is for forward facing use only.

Do not secure your car seat in the front passenger vehicle seating position equipped with an airbag.

Please pay attention to all the red markings / stickers or red plastic parts on the seat, these are the belt routes for installation.

# EST-215 Car Seat

Any straps holding the child car seat to the vehicle should be tight, any straps restraining the child should be adjusted to the child's body, and straps should not be twisted.

Children should not be left in the child restraint system unattended.

Ensure that any lap strap is worn low down, so that the pelvis is firmly engaged.

# EST-215 Car Seat

The child car seat system should be changed when it has been involved in any accident, there could be hidden damages.

Do not make any alterations or additions to the device without the approval of the competent authority.

Any luggage or other objects should be properly secured or stored as they may cause injuries in the event of a collision or sudden braking.

The child car seat must not be used without the cover.

# EST-215 Car Seat

The seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the car seat system performance.

The instructions must be kept with the seat for its life period.

Do not use any load bearing contact points other than those described in the instruction manual and marked on the car seat.



# EST-215 Car Seat

The rigid items and plastic parts of the child car seat must be located following this instruction manual and installed so that they are not liable, during everyday use of the vehicle to become trapped by a movable seat or in a door of the vehicle.

# EST-215 Car Seat

## Customer Information

**WARNING!** ALWAYS GIVE PREFERENCE TO USING THE REAR SEATS OF YOUR VEHICLE EVEN IF YOUR HIGHWAY CODE PERMITS THE USE ON THE FRONT SEAT. CHECK YOUR HIGHWAY CODE AS THIS REGULATION MAY VARY ACCORDING TO THE COUNTRY. CHECK THE VEHICLE MANUAL FOR ADVICE ON FITTING YOUR CAR SEAT IN THE FRONT OF THE VEHICLE. AIRBAGS CAN CAUSE INJURY. DO NOT USE THIS CHILD SEAT ON A PASSENGER SEAT FITTED WITH A FRONT AIRBAG.

COZY  SAFE

# EST-215 Car Seat

**WARNING!** AIRBAGS CAN CAUSE INJURY. DO NOT USE THIS CHILD SEAT ON A PASSENGER SEAT FITTED WITH A FRONTAL AIRBAG.

**WARNING!** TOXIC CLEANING FLUIDS CAN CAUSE ILLNESS. NEVER USE BLEACH, DO NOT IRON. DO NOT MACHINE WASH, DO NOT TUMBLE DRY AS THIS COULD DAMAGE THE COVER AND REQUIRE REPLACING.

## APPLICABILITY

The child car seat is suitable for weight categories I to III ( group I-II ), which means children with a body weight between 9kg and 36kg

Mass Group I: 9-18kg

Mass Group II, III: 15-36kg


This child car seat can be used with it's harness system for children of weight group I. It must be secured with the belt fastener on the 3-point vehicle belt.

For children of weight categories II and III (15kg to 36kg) the harness system must be removed and the vehicle's 3-point belt system used to secure the child.

# EST-215 Car Seat

## Safety Instructions

Only suitable if the approved vehicles are fitted with 3 point safety-belts, approved to UN/ECE Regulation No.16 or other equivalent standards.

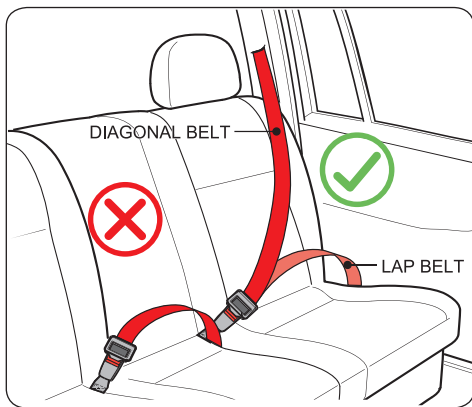

COZY  SAFE


## Using safety seat in this way

Forward facing traffic direction	Correct
Back facing traffic direction	Error
Vehicle is only fitted with 2 - point safety belt	Error
Vehicle is fitted with 3 - point safety belt	Correct
Seat beside the driver (with passenger airbag deactivated)	Correct
Rear seat	Correct
Rear middle seats with 3 - point safety belt	Correct

### Please carefully implement the Country Traffic Safety Regulations.

- Do not install the child safety seat in the front seat with an airbag.
- Please read the vehicle instruction manual carefully on how to deactivate the airbag.

**NOTICE**




- ✔ Suitable to install in this location
- ✘ Unable to install in this position
- ① Do not install the child safety seat on the front seat with an air bag.
- ② Seat can be fitted in this location only with the three point safety belt.

# EST-215 Car Seat

## PARTS


- |   |                        |   |                          |
|---|------------------------|---|--------------------------|
| A | Head cushion           | J | Belt guide               |
| B | Insert cushion         | K | Cup holder               |
| C | Chest pad              | L | Base                     |
| D | Comfort pad            | M | Height adjuster          |
| E | Harness adjuster lever | N | Head belt guide group II |
| F | Harness adjuster strap | O | Belt slot                |
| G | Headrest               | P | Harness                  |
| H | Backrest               | Q | Belt guide               |
| I | Buckle                 | R | Harness connector        |

# EST-215 Car Seat

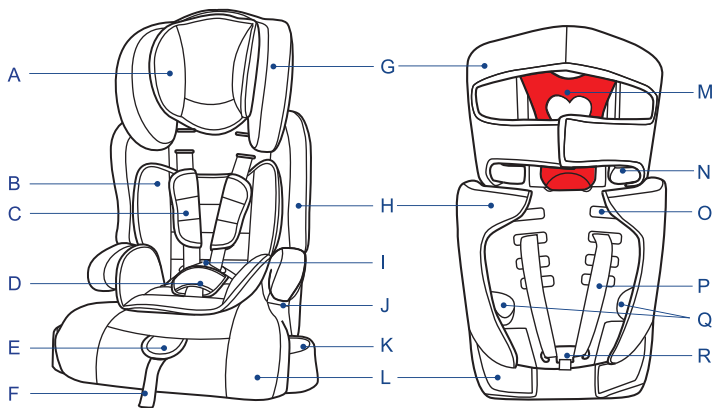

## CUP HOLDERS EACH SIDE

To open the cup holder, pull firmly and it will slide out and click into place.



COZY  SAFE



# EST-215 Car Seat

## Assembly of the car seat

Forward facing group 1, 2, 3

( 9kgs -36kgs / approx 9 months to 11 years )

Installing the car seat into the vehicle.

Attach the base of the car seat to the backrest. (1) Press the hooks down, (2) ensuring that the hooks fit into the holes of the booster seats, then raise the back of the car seat. (3) When you hear a click sound, this indicates that it has successfully locked in place.

Firstly, you will need to check the car seat is assembled correctly and ready for use (see Fig 1, 2, 3), then place the car seat onto the vehicle seat in the direction of travel.

# EST-215 Car Seat

## Assembly of the car seat




Fig.1




Fig.2

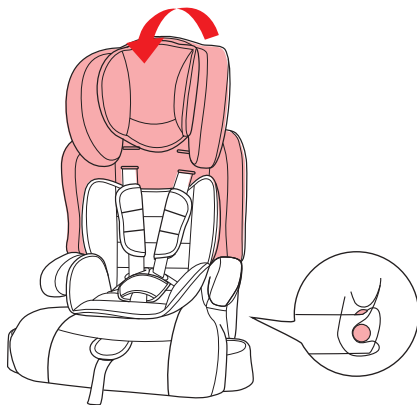


Fig.3

COZY  SAFE


# GROUP 1

COZY  SAFE

# EST-215 Car Seat

## CORRECT SHOULDER STRAPS HEIGHT

Always check that the shoulder straps are at the correct height for your child. The child's shoulders should always be below the slot for the harness.

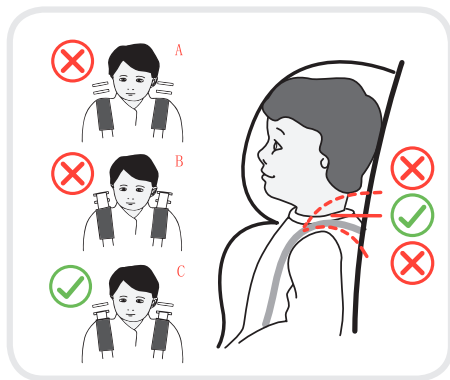

# EST-215 Car Seat

## CHANGING THE SHOULDER STRAP HEIGHT




Fig.1




Fig.2





Fig.3



COZY  SAFE

# EST-215 Car Seat

## CHANGING THE SHOULDER STRAP HEIGHT

Firstly release the strap holding the backrest cover on to gain access to the harness. Slide one of the harness straps off the harness connector.

Then from the front of the seat, pull the harness through the slot in the backrest and fabric cover. Thread the harness strap back through the next hole up or down on the seat backrest.

# EST-215 Car Seat

## CHANGING THE SHOULDER STRAP HEIGHT

Re-thread the harness strap back onto the harness connector at the back of the seat.

Repeat the same process for the other harness strap. Make sure both of the straps go through the slots at the same height.

# EST-215 Car Seat


## INSTALLING THE SEAT

**GROUP**

**1**

**(9 - 18kgs)**

Step 1. Place the child safety seat on the vehicle seat ensuring it is firmly pressed against the vehicle backrest.

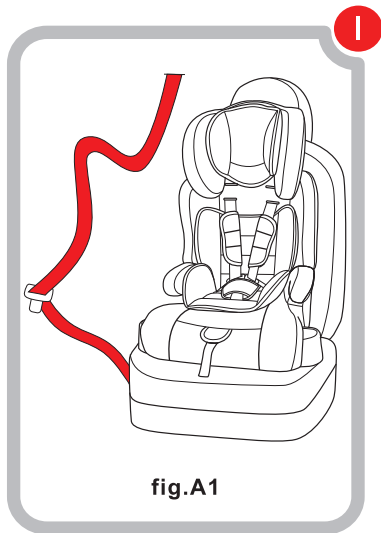

**fig.A1**

COZY  SAFE




# EST-215 Car Seat

**GROUP**

**1**

**(9 - 18kgs)**

Step 2. Pull the vehicle belt out as far as possible. Thread the vehicle belt through the seat belt route slot in the seat's plastic backrest furthest from the car's seat belt buckle, and then out through the other seat route slot and fasten it into the seat belt buckle.

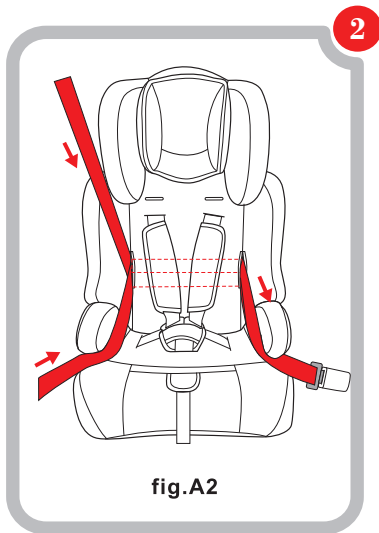

COZY  SAFE


# EST-215 Car Seat

**GROUP**

**1**

**(9 - 18kgs)**

Step 3. Check the car seat belt has not become twisted or tangled and that the lap belt goes under the armrest and the diagonal on the side of the backrest.

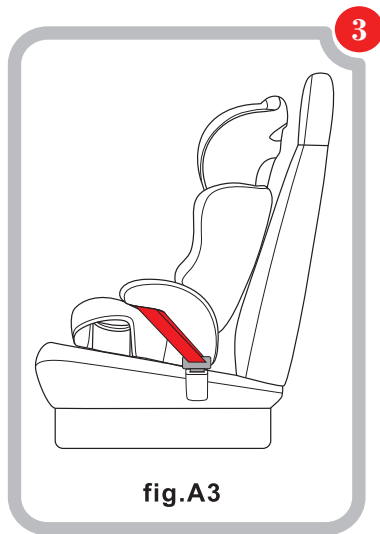

**fig.A3**

COZY  SAFE


# EST-215 Car Seat

**GROUP**

**1**

**(9 - 18kgs)**

Step 4. Place your knee on the base of the child car seat and grip the top of the vehicle seat belt. Pull the seat belt upwards to tighten the seat belt.

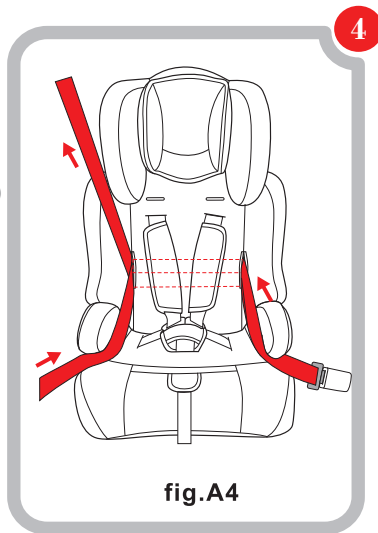

**fig.A4**

COZY  SAFE


# EST-215 Car Seat

**GROUP**

**1**

**(9 - 18kgs)**

Step 5. To finish, tighten the harness by pulling the diagonal strap upwards until there is no slack and the seat is held firmly in place. Now you can strap your child into the seat. Make sure the seat belt has not become twisted. Also check that the cover is not impeding the movement or fit of the seat harness in any way. To release your child car seat follow the above instructions in reverse order.

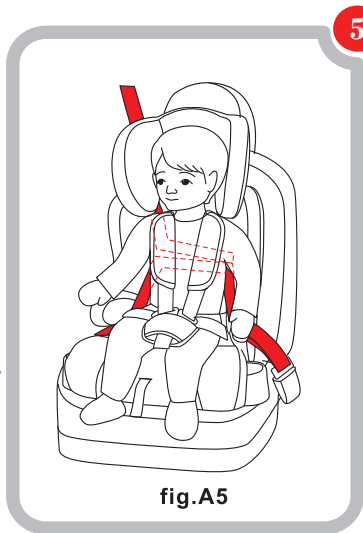

COZY  SAFE

# EST-215 Car Seat

## TIGHTENING THE HARNESS

Pull the shoulder straps upwards to remove the slack from the lap sections of the harness then pull the adjuster strap until the harness is fully tightened.

The harness should be adjusted as tightly as possible without causing discomfort to your child.



# EST-215 Car Seat

## TIGHTENING THE HARNESS

Ensure that the lap strap portion of the harness is located as low as possible towards the thighs and not around the stomach.

A loose harness can be dangerous. Check the harness adjustment and tighten each time the child is placed in the seat.

# EST-215 Car Seat

## LOOSENING THE HARNESS

The harness is loosened by pressing the lever (under the seat cover) on the front of the seat.

Press down on the label marked press as you grip the two shoulder straps with your other hand. Pull the shoulder straps towards you to loosen the harness.

(Do not pull from the chest pads.)


Take care when you adjust the shoulder straps that you do not trap the harness adjuster straps as you press the lever down.




# EST-215 Car Seat

## FASTENING THE SAFETY SEAT BUCKLE

Step 1. Slot the two metal sections of the buckle connectors together.

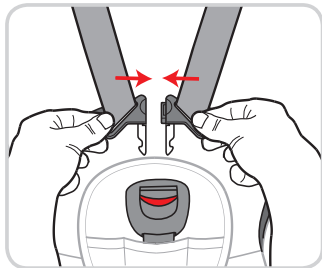

Step 2. Slot the two buckle connectors into the slot in the top of the buckle until they click into place.




COZY  SAFE



# EST-215 Car Seat

## FASTENING THE SAFETY SEAT BUCKLE

Step 3. Always check the harness is correctly locked by pulling the shoulder straps upwards.



To release the harness. Press the red button on the buckle downwards.


# GROUP 2

COZY  SAFE


# EST-215 Car Seat

REMOVING ALL STRAPS


REMOVING THE SAFETY HARNESS LAP STRAPS  
SHOULDER STRAPS



A1



A2



A3

COZY  SAFE

# EST-215 Car Seat




## REMOVING ALL STRAPS SHOULDER STRAPS

Release the strap at the bottom of the backrest cover to gain access to the harness.

Slide both of the harness straps off the harness connector at the back of the backrest and pull the webbing through the slots in the seat backrest and fabric cover.

# EST-215 Car Seat

## REMOVING THE SAFETY HARNESS LAP STRAPS




Turn the webbing retainers on their narrowest end and feed them through the slots in the base of the seat and then through the slots in the fabric cover.

# EST-215 Car Seat

## ADJUST THE HEADREST HEIGHT

The headrest can be adjusted up and down, to a suitable height for the child.

Step 1. Put one hand on the backrest.

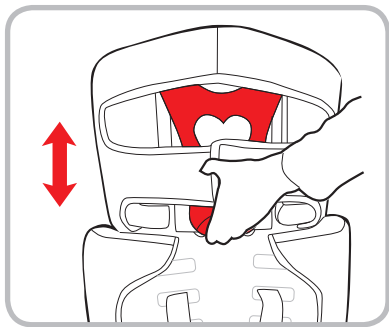

# EST-215 Car Seat

Step 2. Pull the button/lever with your other hand.

Step 3. Position the headrest to a suitable height for your child.



NO-Too low



NO-Too High



YES-Correct

# EST-215 Car Seat

**GROUP**

**2**

Installing the seat

(15 - 25kgs)




fig.B1

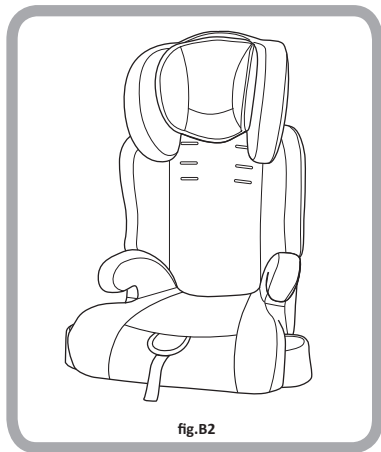


fig.B2

COZY  SAFE





# EST-215 Car Seat

GROUP

2

(15 - 25kgs)

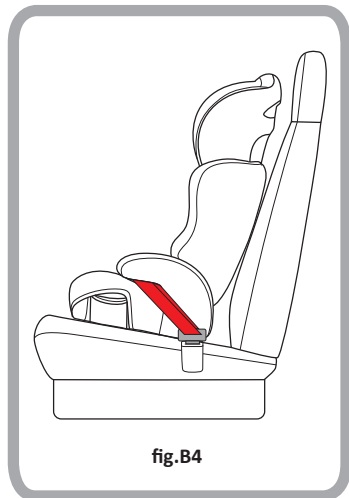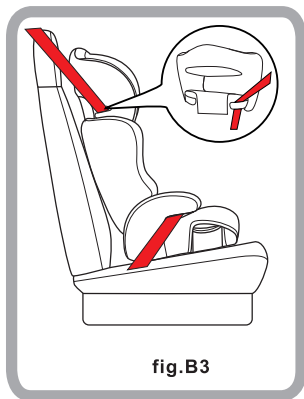

COZY  SAFE

# EST-215 Car Seat

GROUP

2

(15 - 25kgs)

Step 1. Place the child safety seat on the vehicle seat ensuring it is firmly pressed against the vehicle backrest.

Step 2. Place the child in the child safety seat.



fig.B5

COZY  SAFE

# EST-215 Car Seat



**(15 - 25kgs)**

Step 3. Fasten the seat belt, making sure that both sections of the seat harness go under the armrest near the buckle, the diagonal belt goes through the red belt guide on the side of the headrest. Check that the harness has not become twisted and tighten the seat belt by pulling the diagonal strap upwards.

Again make sure the seat belt has not become twisted. Also check that the cover is not impeding the movement or fit of the seat harness in any way. To release your child simply unfasten the seat belt in the normal way.

# GROUP 3

COZY  SAFE

# EST-215 Car Seat

**GROUP**


**3**

Installing the seat

**(22-36kgs)**

Remove the backrest.

To remove the backrest simply follow the process below.

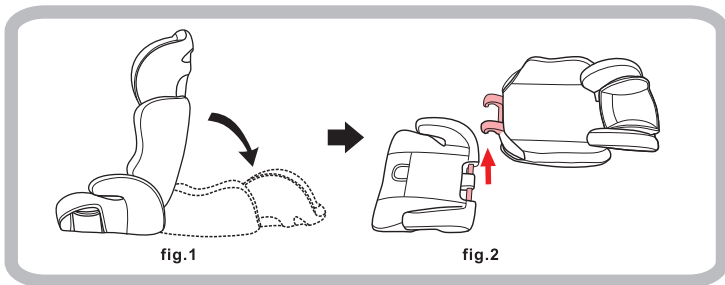

COZY  SAFE

# EST-215 Car Seat

**GROUP**

**3**

**(22-36kgs)**

Step 1. Place the seat forward facing in the vehicle, ensuring it is pushed firmly into the vehicle seat and sit your child on the seat.

Step 2. Keep the seat-belt tight across your child, holding on to the seat-belt at the position where it crosses your child's shoulder (fig.3).



**fig.3**

COZY  SAFE

# EST-215 Car Seat



**(22-36kgs)**

Step 3. Now, pull the seat-belt forward away from your child, keeping hold of the seat-belt at the position where it crossed your child's shoulder.

Step 4. Remove any slack from the seat belt. Your child should now be secure.

# EST-215 Car Seat

## Checklist

To ensure the safety of your child, check the following after installation and before every journey:

- Check the car seat is correctly assembled.
- Do not put the car seat in a seat fitted with an airbag.
- Check the car seat is facing forwards in the vehicle in the direction of the travel.
- Check the headrest is at the right height for your child.



# EST-215 Car Seat

- Check that the 3 - point vehicle safety-belt is in the correct position for the child.
- Check the buckle tongue is fully inserted into the vehicle seat buckle.

## Maintenance Advice

To remove the cover

- Separate the booster seat and the backrest.
- Open the velcro fastener and remove the cover of the booster seat.

# EST-215 Car Seat

- Open the velcro fastener on the back of the backrest and remove the cover.
- Open the velcro fastener and remove the headrest.

## Cover Removing and Cleaning

**WARNING!** TOXIC CLEANING FLUIDS CAN CAUSE ILLNESS, NEVER USE BLEACH. DO NOT IRON, DO NOT MACHINE WASH. DO NOT TUMBLE DRY AS THIS COULD DAMAGE THE COVER AND REQUIRE REPLACING.

# EST-215 Car Seat

The car seat cover is removable and washable. In case of light staining, clean using a damp cloth or soapy water. The cover can be removed completely and hand washed up to 30°C.



Hand wash,  
water  
temperature  
below 30°C



Do not bleach



Dryclean, any  
solvent except  
trichloroethylene



Do not tumble dry



Do not iron

## Additional information

Do not use this car seat on a shopping trolley.

This car seat is not approved for use on aircraft.

CHILD INFORMATION  
(KEEP WITH CAR SEAT AT ALL TIMES IN  
CASE OF EMERGENCY)



NAME:

.....

[www.cozynsafe.com](http://www.cozynsafe.com)

DATE OF BIRTH (DD/MM/YYYY):

.....

ADDRESS:

.....  
.....  
.....

ALLERGIES/MEDICAL CONDITIONS:

.....  
.....  
.....

EMERGENCY CONTACT 1:

NAME:

.....

PHONE NUMBER:

.....

EMERGENCY CONTACT 2:

NAME:

.....

PHONE NUMBER:

.....

Cozy N Safe  
Oxford Street, Wolverhampton,  
West Midlands, WV14 7DP, U.K.  
Tel: +44 (0) 1902 494905  
Fax: +44 (0) 1902 490211  
Email: [enq@cozynsafe.com](mailto:enq@cozynsafe.com)