

ATI

MINIEXCAVATOR




Catalog 2024



SPECIFICATIONS

- QUINTALS 10 MOTOR
- **KOOP 192F**
- HORSE POWER 10
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **2,2 KM/H**
- CHASSIS STRETCH **76-85 cm**
- SWING ARM
- GEAR PUMP
- SWING ANGLE **53°**
- OIL CAPACITY **20 Lt/min**

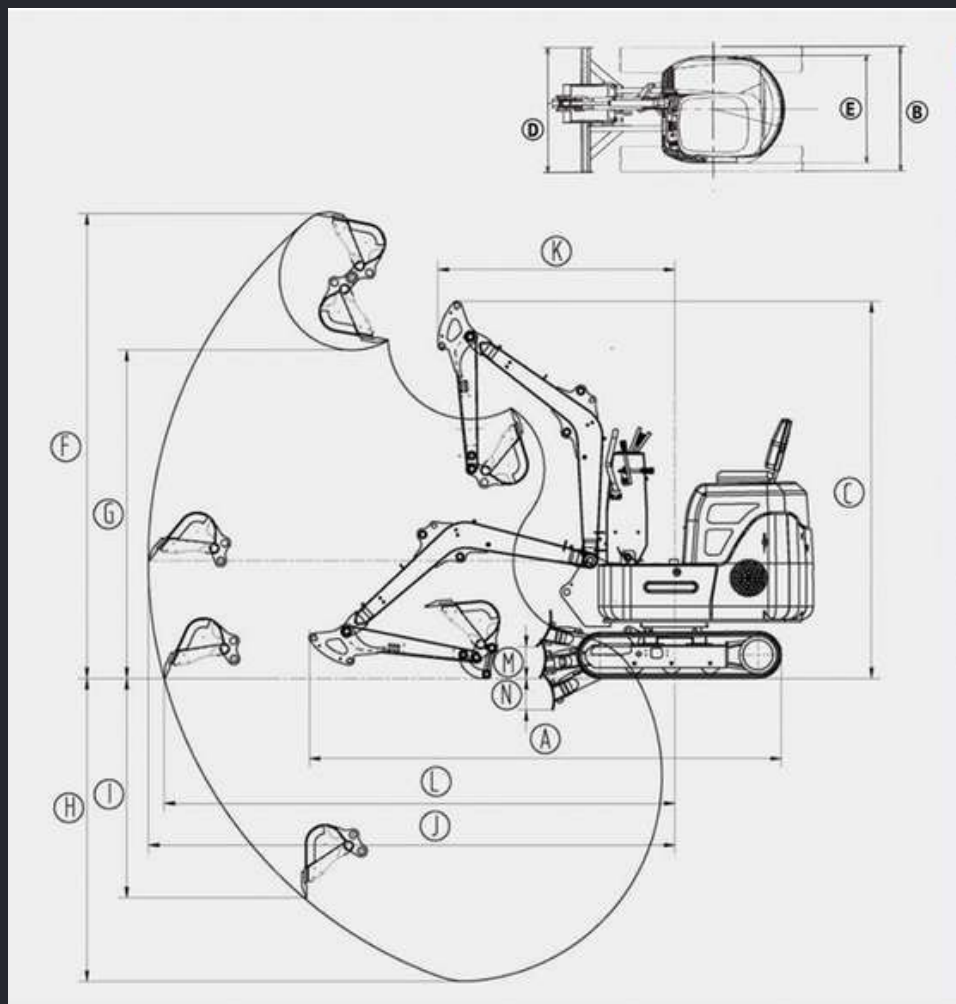

UNIT	MM
A	2600
B	860
C	1480
D	860
E	680
F	2580
G	1830
H	2000
I	1600
J	2850
K	1290
L	2700
M	260
N	190


MAX.DIGGING HEIGHT	MM	2580
MAX. DUMPING HEIGHT	MM	1830
MAX. DIGGING DEPTH	MM	2000
MINI TURNING RADIUS OF FRONT END	MM	1290
MAX. DIGGING DISTANCE	MM	2850

TOTAL LENGTH	MM	2600
TOTAL WIDTH	MM	860
TOTAL HEIGHT	MM	1480
DOZER BLADE	MM	860*210
INCLINE		30 %



SPECIFICATIONS

- QUINTALS/ WEIGHT **12**
- MOTOR **KOOP 192F**
- HORSE POWER **10**
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **2,2 km/h**
- CHASSIS STRETCH **80-95 cm**
- SWING ARM
- GEAR PUMP
- WING ANGLE **53°**
- OIL CAPACITY **28 Lt/min**

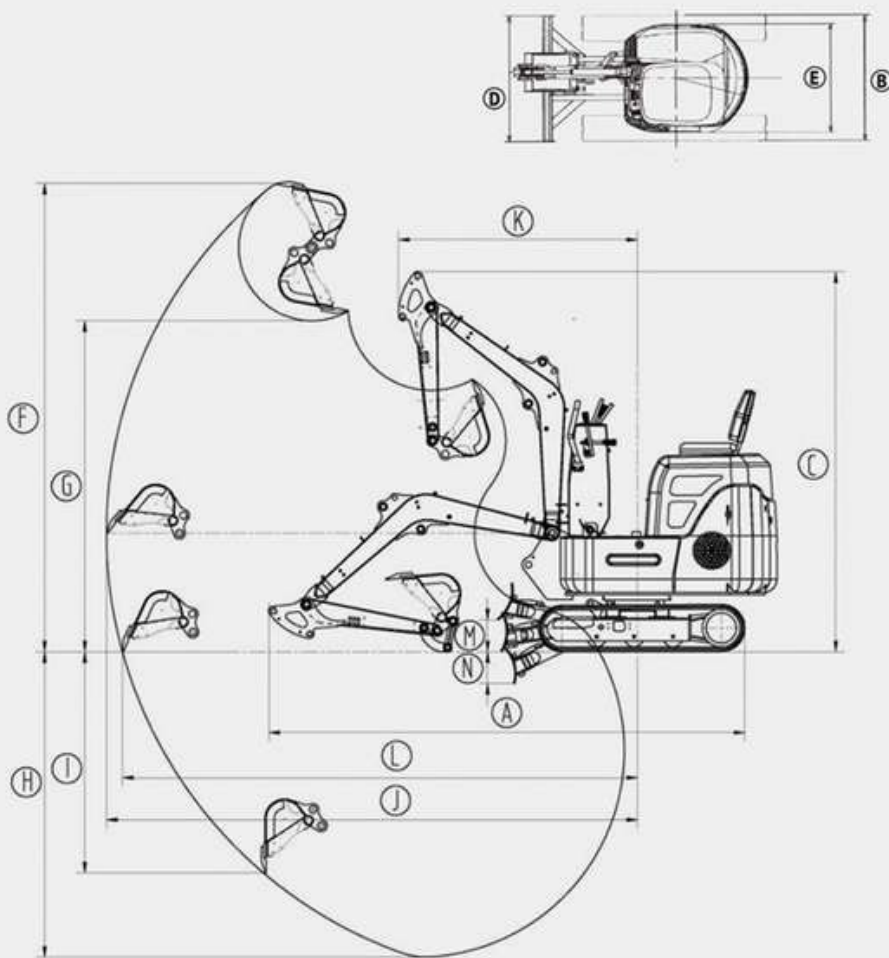

UNIT	MM
A	2600
B	860
C	1480
D	860
E	680
F	2580
G	1830
H	2000
I	1600
J	2850
K	1290
L	2700
M	260
N	190

MAX.DIGGING HEIGHT	MM	2580
MAX. DUMPING HEIGHT	MM	1830
MAX. DIGGING DEPTH	MM	2000
MINI TURNING RADIUS OF FRONT END	MM	1290
MAX. DIGGING DISTANCE	MM	2850

TOTAL LENGTH	MM	2600
TOTAL WIDTH	MM	860
TOTAL HEIGHT	MM	1480
DOZER BLADE	MM	860*210
INCLINE		30 %

ATI
MINIEXCAVATOR

12 PRO



SPECIFICATIONS

- QUINTALS / WEIGHT **12**
- MOTOR **KUBOTA D192F**
- HORSE POWER **10**
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **2,2 KM/H**
- CHASSIS STRETCH **84.5-101.5 cm**
- SWING ARM
- GEAR PUMP
- SWING ANGLE **53°**
- OIL CAPACITY **28 Lt/min**




SPECIFICATIONS

- QUINTALS / WEIGHT 12
- MOTOR **YUNNEI DEF20CAF4 ELECTRIC**
- HORSE POWER 55
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **2,2 KM/H**
- CHASSIS STRETCH **1100 MM**
- SWING ARM
- GEAR PUMP
- SWING RADIUS **1190 MM**
- BATTERIE TYPE **64V, 150 MAH**
- DURATION OF BATTERY **8H**
- RECHARGE DURATION **6-8 H**
- **HYDRAULIC COOLING**



SPECIFICATIONS

- QUINTALS / WEIGHT **17**
- MOTOR **KUBOTA D722**
- HORSE POWER **14**
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **2 KM/H**
- CHASSIS STRETCH **99-125 cm**
- SWING ARM
- GEAR PUMP
- SWING ANGLE **55°**
- OIL CAPACITY **30 Lt/min**

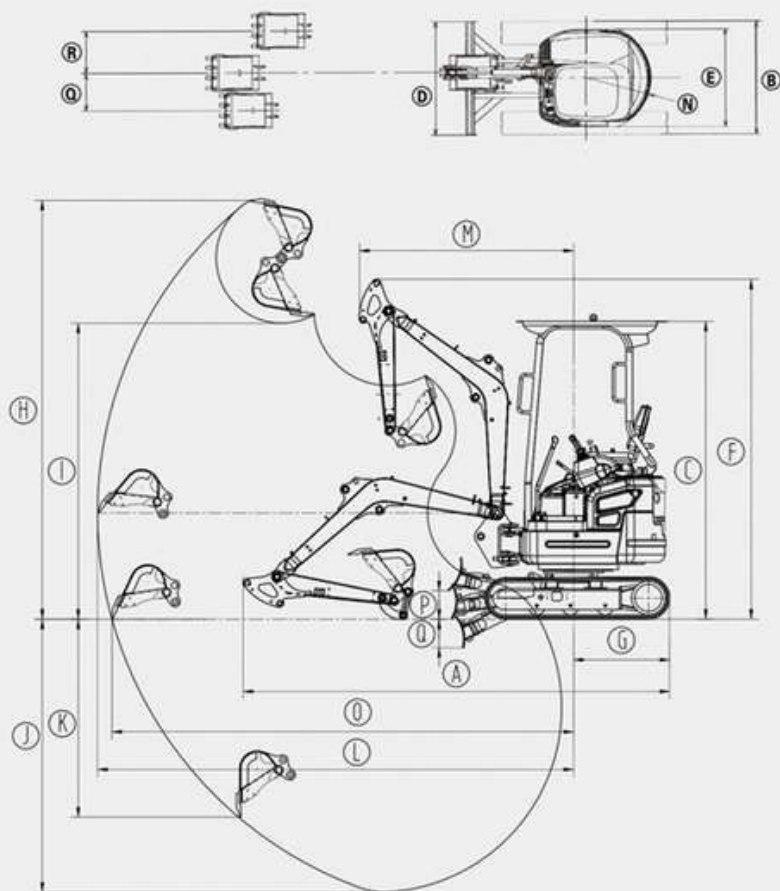

UNIT	MM
A	3300
B	1110
C	236
D	0
E	111883
F	2635
G	745
H	3310
I	2370
J	2120
K	1535
L	3640
M	1660
N	715
O	3570
P	260
Q	190
R	480
S	410


MAX.DIGGING HEIGHT	MM	3310
MAX. DUMPING HEIGHT	MM	2370
MAX. DIGGING DEPTH	MM	2120
MINI TURNING RADIUS OF FRONT END	MM	1660
MAX. DIGGING DISTANCE	MM	3640

TOTAL LENGTH	MM	3300
TOTAL WIDTH	MM	1110
TOTAL HEIGHT	MM	2360
DOZER BLADE	MM	1110*270
INCLINE		30 %



SPECIFICATIONS

- QUINTALS / WEIGHT **20**
- MOTOR **KUBOTA D902-T**
- HORSE POWER **16**
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **2 KM/H**
- CHASSIS STRETCH **99-125 cm**
- SWING ARM
- GEAR PUMP
- SWING ANGLE **65°**
- OIL CAPACITY **35 Lt/min**

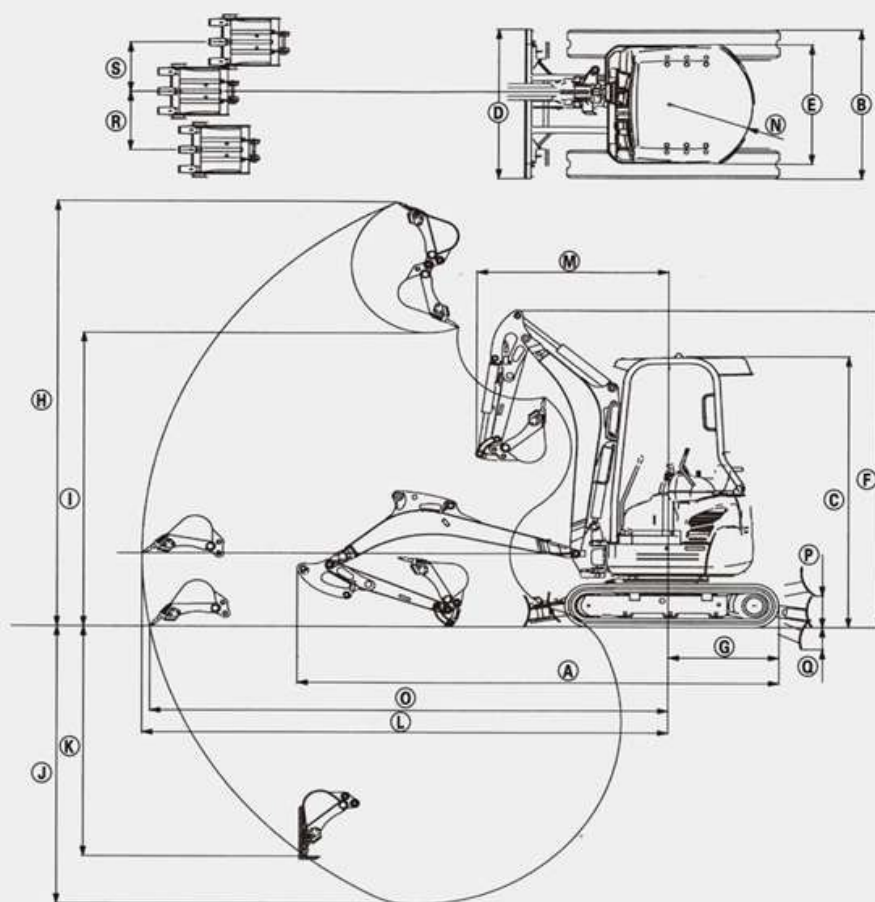

UNIT	MM
A	3570
B	1240
C	225
D	0
E	1240
F	2630
G	815
H	3540
I	2440
J	2310
K	1910
L	3900
M	1430
N	620
O	3840
P	245
Q	200
R	485
S	410


MAX.DIGGING HEIGHT	MM	3540
MAX. DUMPING HEIGHT	MM	2440
MAX. DIGGING DEPTH	MM	2310
MINI TURNING RADIUS OF FRONT END	MM	1430
MAX. DIGGING DISTANCE	MM	3900

TOTAL LENGTH	MM	3570
TOTAL WIDTH	MM	1240
TOTAL HEIGHT	MM	2250
DOZER BLADE	MM	990/1240*268
INCLINE		30 %



SPECIFICATIONS

- QUINTALS / WEIGHT **25**
- MOTOR **YANMAR 3TNV80F**
- HORSE POWER **21**
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **2,4/4,2 KM/H**
- CHASSIS STRETCH **130-150 cm**
- SWING ARM
- PISTON PUMP
- SWING ANGLE **75°**
- OIL CAPACITY **52 Lt/min**

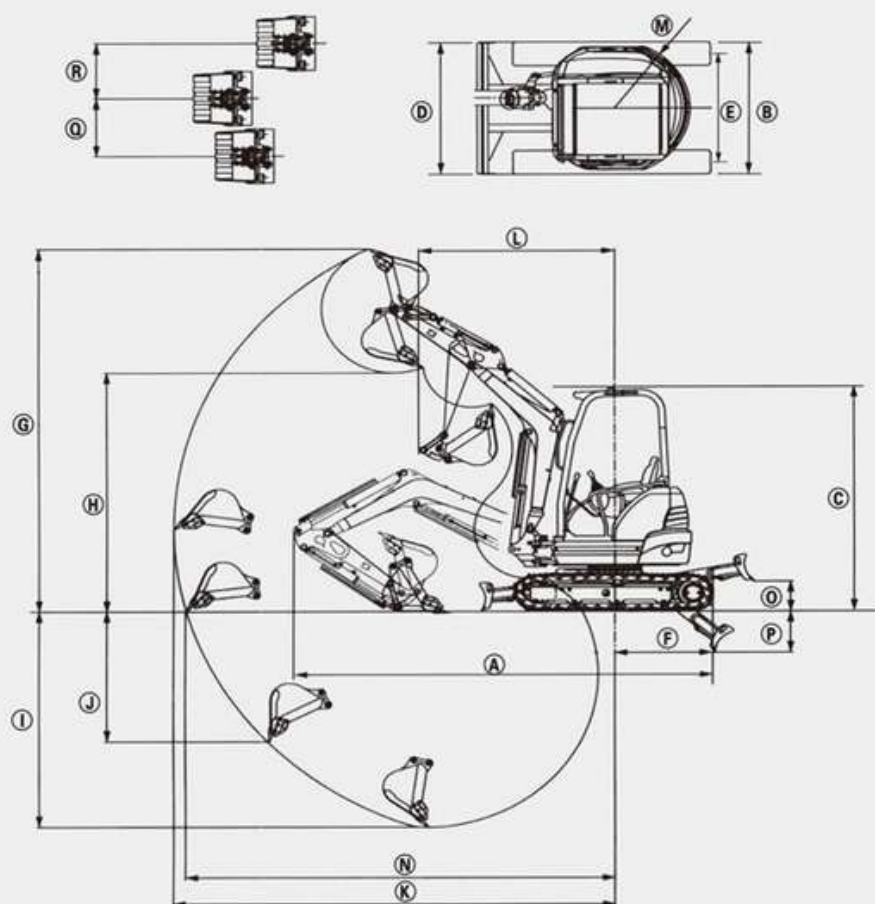

UNIT	MM
A	3850
B	1300
C	238
D	0
E	1350
F	930
G	3800
H	2550
I	2320
J	1900
K	4140
L	1850
M	710
N	4015
O	340
P	270
Q	620
R	590

MAX.DIGGING HEIGHT	MM	3880
MAX. DUMPING HEIGHT	MM	2550
MAX. DIGGING DEPTH	MM	2320
MINI TURNING RADIUS OF FRONT END	MM	1850
MAX. DIGGING DISTANCE	MM	4140

TOTAL LENGTH	MM	3982
TOTAL WIDTH	MM	1300
TOTAL HEIGHT	MM	2380
DOZER BLADE	MM	1300/1500*292
INCLINE		30 %




ATI
MINIEXCAVATOR

30 PRO

SPECIFICATIONS

- QUINTALS / WEIGHT **30**
- MOTOR **YANMAR 3TNV88F**
- HORSE POWER **25**
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED **3/4,2 KM/H**
- CHASSIS STRETCH **155 cm**
- SWING ARM
- PISTON PUMP
- SWING ANGLE **70°**
- OIL CAPACITY **70 Lt/min**

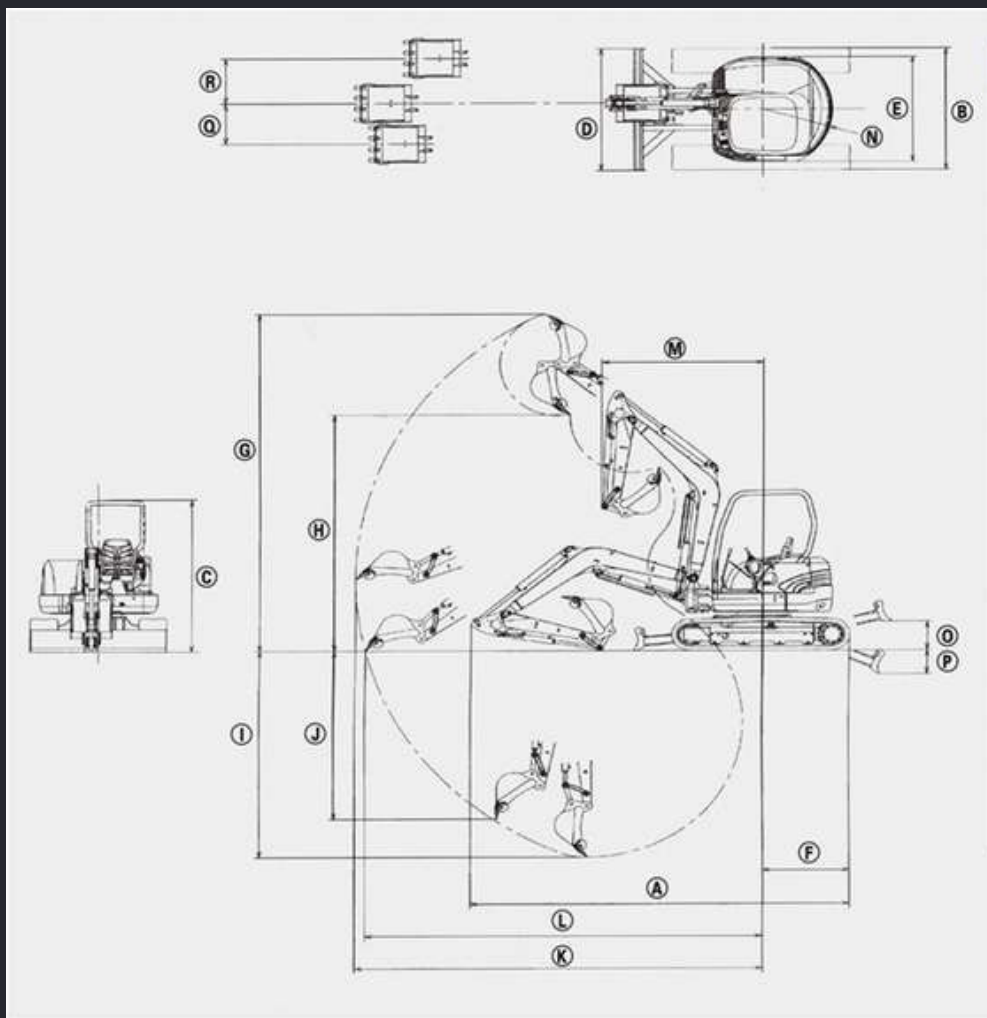

UNIT	MM
A	4485
B	1550
C	244
D	0
E	1550
F	1030
G	4600
H	3175
I	2880
J	2305
K	4965
L	4845
M	2035
N	790
O	360
P	340
Q	635
R	600

MAX.DIGGING HEIGHT	MM	4600
MAX. DUMPING HEIGHT	MM	3175
MAX. DIGGING DEPTH	MM	2880
MINI TURNING RADIUS OF FRONT END	MM	4845
MAX. DIGGING DISTANCE	MM	4965

TOTAL LENGTH	MM	4485
TOTAL WIDTH	MM	1550
TOTAL HEIGHT	MM	2440
DOZER BLADE	MM	1550*335
INCLINE	MM	30 %




ATI
MINIEXCAVATOR

35 PRO

SPECIFICATIONS

- QUINTALS / WEIGHT 35
- MOTOR **YANMAR 3TNV88F**
- HORSE POWER 25
- **4 TIME FUNKTION**
- FUEL **DIESEL**
- FULL SPEED 3/4,2 KM/H
- CHASSIS STRETCH 155 cm
- SWING ARM
- PISTON PUMP
- SWING ANGLE 70°
- OIL CAPACITY 70 Lt/min

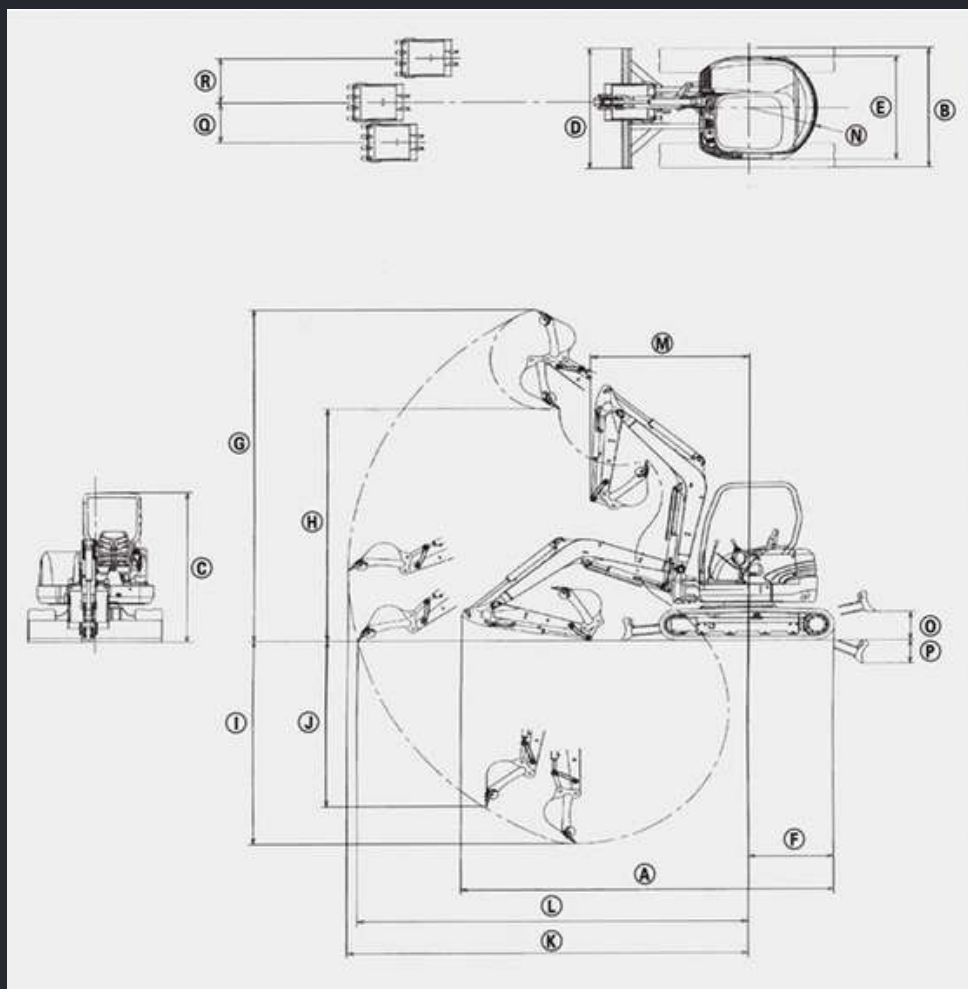

UNIT	MM
A	4485
B	1550
C	244
D	0
E	1550
F	1030
G	4600
H	3175
I	2880
J	2305
K	4965
L	4845
M	2035
N	790
O	360
P	340
Q	635
R	600

MAX.DIGGING HEIGHT	MM	4600
MAX. DUMPING HEIGHT	MM	3175
MAX. DIGGING DEPTH	MM	2880
MINI TURNING RADIUS OF FRONT END	MM	4845
MAX. DIGGING DISTANCE	MM	4965

TOTAL LENGTH	MM	4485
TOTAL WIDTH	MM	1550
TOTAL HEIGHT	MM	2440
DOZER BLADE	MM	1550*335
INCLINE	MM	30 %

ATI
MINIEXCAVATOR

DUMPER
TD300
MINI



SPECIFICATIONS

- **REINFORCED ORBITAL HYDRAULIC MOTORS**
- **DOUBLE HYDRAULIC GEAR PUMP**
- **ANTI VIBRATION CONTROL HANDLE**
- **INTERNAL AND EXTERNAL SIDE PROTECTIONS OF THE ROLLERS FRAME SUPPORT**
- **OPERATORS PLATFORM**
- **HOUR COUNTER**
- **REINFORCED DUMPER BOX AND LOADING PALLET**
- **MOTOR BRIGGS STRATTON CR950 PETROL**
- **ENGINE SIZE 208 CC**
- **HORSE POWER 6.5**
- **LOAD CAPACITY 500 KG**
- **SPEED 2,9 KM/H**
- **SELF LOADING BUCKET**



ATI
MINIEXCAVATOR

DUMPER TD500A

SPECIFICATIONS

- **REINFORCED ORBITAL HYDRAULIC MOTORS**
- **DOUBLE HYDRAULIC GEAR PUMP**
- **ANTI VIBRATION CONTROL HANDLE**
- **INTERNAL AND EXTERNAL SIDE PROTECTIONS OF THE ROLLERS FRAME SUPPORT**
- **OPERATORS PLATFORM**
- **HOUR COUNTER**
- **REINFORCED DUMPER BOX AND LOADING PALLET**
- **MOTOR BRIGGS STRATTON CR950 PETROL**
- **ENGINE SIZE 270 CC**
- **HORSE POWER 11**
- **LOAD CAPACITY 500 KG**
- **SPEED 3.1 KM/H**
- **SELF LOADING BUCKET**



ATI
MINIEXCAVATOR

DUMPER

TD800

MAX

SPECIFICATIONS

- **REINFORCED ORBITAL HYDRAULIC MOTOTRS**
- **DOUBLE HYDRAULIC GEAR PUMP**
- **ANTI VIBRATION** CONTROL HANDLE
- **INTERNAL** AND **EXTERNAL** SIDE PROTECTIONS OF THE ROLLERS FRAME SUPPORT
- OPERATORS PLATFORM
- HOUR COUNTER
- **REINFORCED DUMPER BOX AND LOADING PALLET**
- MOTOR **BRIGGS STRATTON KAMA 178FE PETROL**
- ENGINE SIZE **420 CC**
- HORSE POWER **13.5**
- LOAD CAPACITY **800 KG**
- SPEED **3.2 KM/H**
- SELF LOADING BUCKET



ROBOT MAX 800D

SPECIFICATIONS

- **MOTOR LONCIN G420FL**
- **HORSE POWER 16**
- **TANK CAPACITY 7,1 LITRI**
- **SPEED 5 KM/H**
- **MACHINE DIMENSIONS 1080*1230*670**
- **MACHINE WEIGHT 250 KG**
- **CUTTING WIDTH 800 MM**
- **CUTTING HEIGHT 20-150 MM**
- **CLIMBING ABILITY 45%**
- **BLADE ADJUSTMENT VIA REMOTE CONTROL**
- **AIR COOLING**
- **RADIO-CONTROL DISTANCE 400 M**



ATI

MINIEXCAVATOR

CONTACT

**Email: info@atiminiexcavator.com
atiminiexcavator.com**

PHONE 0039 0471-202651

BOLZANO 39100