

SPACE SAVING RACK PROTECTORS

Handle-It® Space Saving Rack Protectors guard uprights from powered and non-powered equipment traffic in your warehouse.

Our special design allows for you to install the guard very close to the uprights, saving vital floor space while not compromising the protection value.

Features & Benefits

- Special notched design saves vital space
- Heavy duty 3/8" steel construction
- Especially useful in narrow aisle situations and tunnels
- Steel floor angles attach securely to floor with 4 or 5 wedge anchors (sold separately)
- Powder coated Handle-It yellow for high visibility
- Narrow formed guard keeps the first pallet bay clear
- Anchor point in the nose increases holding power right at the rack upright

Specifications

Item Numbers:

- IRP-42LH-HD • IRP-42RH-HD • IRP-42-HD
- IRP-48LH-HD • IRP-48RH-HD • IRP-48-HD
- Material Thickness: 3/8" (heavy-duty)
- Standard Height: 12" tall ends; 6" x 4" floor angle
- Anchor Size: 3/4" x 4.25" wedge anchor



Left Hand Rack Protector



Right Hand Rack Protector



Double-End Rack Protector for
Single Rows




Standard Rack Protector vs. Space
Saving profile



HANDLE·IT®

SPACE-SAVING RACK PROTECTOR

SPACE-SAVING RACK PROTECTOR DIMENSIONS

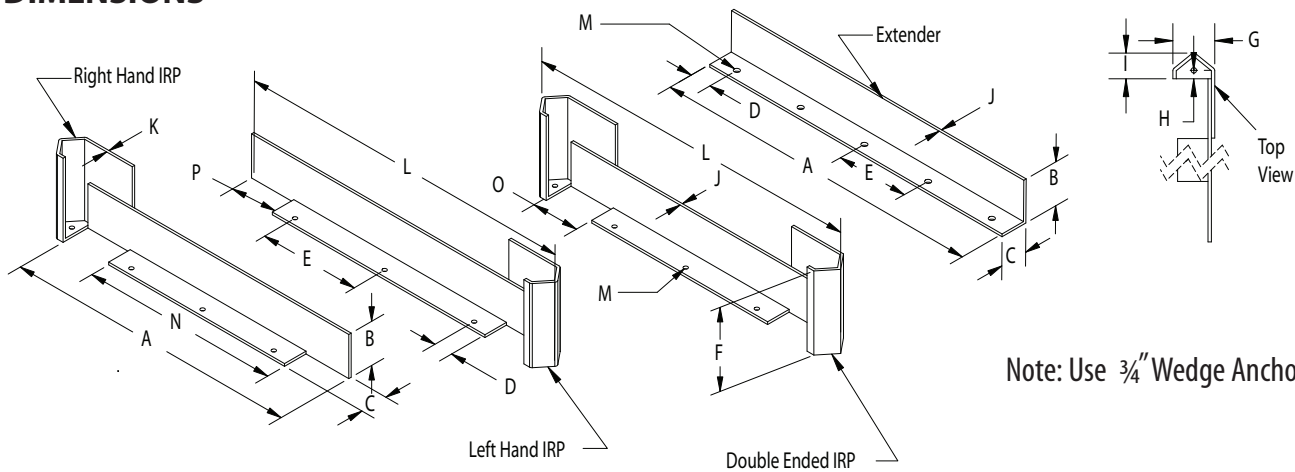

Note: Use 3/4" Wedge Anchors for installation

Dimensions (Inches)

| Part | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Number of Holes | Curve Location |
|-------------|---------------------------|---------------|--------------|-------------|--------------|-----------------|----------------|-------------------|-----------------|---------------------|-----------------|------------------------|---------------|---------------------------|-------------------|-------------------|-----------------|----------------|
| | Outer Length of Extension | Height of Leg | Width of Leg | End to Hole | Hole to Hole | Height of Curve | Width of Curve | Curve Hole to End | Length of Curve | Extension Thickness | Curve Thickness | Outside Overall Length | Hole Diameter | Inner Length of Extension | Gap Length Single | Gap Length Double | | |
| IRP-42-HD | 43 | 6.5 | 4 | 2.8 | 11.7 | 12 | 5 | 1 | 3 | 0.4 | 0.4 | 49 | 0.94 | 25 | 9 | N/A | 5 | Both Sides |
| IRP-42LH-HD | 43 | 6.5 | 4 | 2.8 | 11.7 | 12 | 5 | 1 | 3 | 0.4 | 0.4 | 46 | 0.94 | 25 | N/A | 9 | 4 | Left |
| IRP-42RH-HD | 43 | 6.5 | 4 | 2.8 | 11.7 | 12 | 5 | 1 | 3 | 0.4 | 0.4 | 46 | 0.94 | 25 | N/A | 9 | 4 | Right |
| IRP-48-HD | 49 | 6.5 | 4 | 2.8 | 14.8 | 12 | 5 | 1 | 3 | 0.4 | 0.4 | 55 | 0.94 | 25 | 9 | N/A | 5 | Both Sides |
| IRP-48LH-HD | 49 | 6.5 | 4 | 2.8 | 14.8 | 12 | 5 | 1 | 3 | 0.4 | 0.4 | 52 | 0.94 | 25 | N/A | 14 | 4 | Left |
| IRP-48RH-HD | 49 | 6.5 | 4 | 2.8 | 14.8 | 12 | 5 | 1 | 3 | 0.4 | 0.4 | 52 | 0.94 | 25 | N/A | 14 | 4 | Right |
| RP-42EX-HD | 43 | 6.5 | 4 | 5.8 | 10.5 | N/A | N/A | N/A | N/A | 0.4 | N/A | 43 | 0.94 | N/A | N/A | N/A | 4 | No Curve |
| RP-48EX-HD | 47.5 | 6.5 | 4 | 2.8 | 10.5 | N/A | N/A | N/A | N/A | 0.4 | N/A | 47.5 | 0.94 | N/A | N/A | N/A | 5 | No Curve |
| RP-62EX-HD | 62 | 6.5 | 4 | 4.8 | 10.5 | N/A | N/A | N/A | N/A | 0.4 | N/A | 62 | 0.94 | N/A | N/A | N/A | 6 | No Curve |

Custom sizes and lengths are available. Please consult factory.

Space-Saving Rack Protector Equipment Specification

To ensure proper protection consider the following:

- Measure overall length of area that is to be protected.
- Measure the size of rack foot plates and clear dimensions between the foot plates.
- Is this a single or double end application? (The exposure to traffic is the key factor.)
- Placing protection equipment as close as possible and still provide an adequate barrier in front of what you're protecting to achieve proper installation.

Protection equipment is used anywhere throughout the plant and warehouse. Key areas for these types of equipment are rack and shelving ends. The cost of the protection equipment is minimal when considering what is being protected and the cost to repair or replace it if it is damaged.