

DS-2CD6332FWD-I (V)(S)

3 Megapixel WDR Fisheye Network Camera



Key features

- 1/3" progressive scan CMOS
- 3 mega-pixel image sensor
- Up to 2048 x 1536 resolution
- 360° panoramic view
- Multiple viewing modes
- Virtual PTZ
- Up to 15m IR range
- Audio/Alarm IO optional (-S)
- Outdoor version optional (-V)


Order models

DS-2CD6332FWD-I, DS-2CD6332FWD-IS
DS-2CD6332FWD-IV, DS-2CD6332FWD-IVS

* -S: Audio/Alarm, RS 485 interface optional

* -V: IP66, Vandal-proof optional

Dimensions

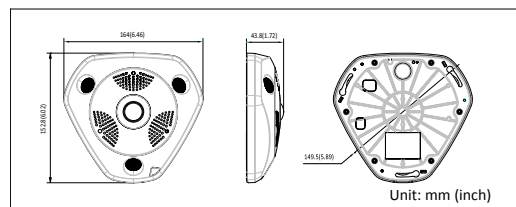

Accessories



DS-1280ZJ-DM25
Junction Box



DS-1273ZJ-DM25
Wall Mount
Bracket



DS-1271ZJ-DM25
Pendant Mount
Bracket

DS-2CD6332FWD-I	
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	0.1 lux @ (F1.2,AGC ON) 0.6 lux @ (F2.8,AGC ON) 0 lux with IR
Shutter Speed	1/25 s to 1/100,000 s
Slow Shutter	Support
Lens	1.19mm @F2.0, angle of view: 360°
Lens Mount	M12
Day & Night	ICR
Digital Noise Reduction	3D DNR
Wide Dynamic Range	120dB WDR
Compression Standard	
Video Compression	H.264/MJPEG
H.264 Type	Baseline Profile / Main Profile / High Profile
Video Bit Rate	32 Kbps – 16 Mbps
Audio Compression	G.711/G.726/MP2L2
Audio Bit Rate	64Kbps(G.711) / 16Kbps(G.726) / 64Kbps (MP2L2)
Image	
Max. Resolution	2048x1536
Frame Rate	High-frame Mode: support 50Hz: 1 x fisheye (2048 x 1536, 25fps) or (1536 x 1536, 25fps) or 4 x PTZ (800 x 600, 25fps) 60Hz: 1 x fisheye (2048*1536, 25fps) or (1536 x 1536, 30fps) or 4 x PTZ (800 x 600, 30fps) Multi-channel Mode: support 50Hz: 1 x fisheye (1536 x 1536, 20fps) and 1 x panoramic (1600 x 1200, 20fps) and 3 x PTZ (800 x 600, 20fps) 60Hz: 1 x fisheye (1536 x 1536, 20fps) and 1 x panoramic (1600 x 1200, 20fps) and 3 x PTZ (800 x 600, 20fps)
Image Setting	Saturation, Brightness, Contrast adjustable by client software or web browser
Backlight Compensation	Support
Day/night Switch	Auto / Schedule / Alarm trigger
Network	
Network Storage	NAS
Alarm trigger	Motion detection, dynamic analysis, tamper alarm, network disconnect, IP address conflict, storage full, storage error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour (SIP optional)
Security	User Authentication, Watermark, IP address filtering, Anonymous access
Standard	ONVIF, PSIA, CGI
Interface	
Audio Input (-S)	1-ch 3.5 mm audio interface, Mic in/Line in, built-in Microphone
Audio Output (-S)	1-ch 3.5 mm audio interface, built-in speaker
Communication Interface	1 RJ45 10M/100M/1000M Ethernet port, 1 RS-485 interface (-S)
Alarm Input (-S)	1
Alarm Output (-S)	1
On-board storage	Built-in Micro SD/SDXC slot, up to 64 GB
General	
Operating Conditions	-30 °C – 60 °C (-22 °F – 140 °F) Humidity 95% or less (non-condensing)
Power Supply	DC12V±10% / PoE
Power Consumption	Max. 11W
IR range	Max. 15m
Protection	IEC 60068-2-75 test, Eh, 50J; EN 50102, EN50155, IK10 (-V)
Dimensions	164x152.8x45.5mm (6.46"x6.02"x1.79")
Weight	1400g