

Install Confidence.™



FIRE INSPIRED™

Hearth Products Controls Co.

Wind Guard Installation Instructions

Items included:

- Glass panels
- Brackets with set screws and silicone washers
- Black rubber feet

Tools needed:

- #2 Phillips screwdriver



Round



Square/Rectangle

Instructions:

1. Carefully remove the wind guard from the packaging and inspect for any damage such as chips or cracks. Place glass panels on a soft flat surface to prevent any damage.
2. Ensure that each bracket has 2 set screws in them with the silicon inserts attached to the back side.
3. Stand the glass panel vertically and slide the bracket onto the glass. The glass should be flush with the bottom of the brackets. Fig.1 and Fig.2
4. Using a #2 Phillips screw driver, loosely connect the brackets to the glass panels. Repeat until the wind guard is fully assembled. Fig.1 and Fig.2
5. Tighten all screws starting at the bottom.
6. Now that your wind guard is fully assembled, center the complete assembly over your fire pit insert.

Square/Rectangle Bracket

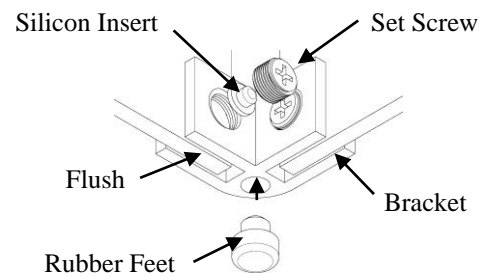


Fig. 1

Warnings:

- Never place your wind guard directly on the fire pit insert.
- Always ensure the rubber feet are used.
- Always ensure the silicon insert is on the set screws.
- Always ensure there is a 1/2" gap between the glass panels.
- Always check the glass panels for cracks. DO NOT use glass panels with a crack.

Maintenance:

- Clean the glass 2-3 times per season or as needed.
- Clean with a non-abrasive glass cleaner and a clean lint-free cloth.
- When storing the wind guard, it is recommended to be stored in a safe place.
- Wrap glass with in a clean lint-free cloth. (If original packaging is not available.)
- Periodically check the set screws to ensure tight.

Round Bracket

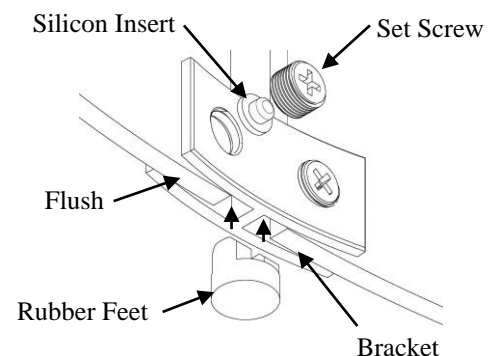


Fig. 2