

Racelogic's **Performance Box Touch** measures speed, lap and split times, delta-T, acceleration, deceleration as well as distance and more.

All these parameters are logged to an SD card ten times per second and can be viewed on screen and analysed in detail using the VBOX Test Suite or Circuit Tools software provided.

Performance Box Touch has four operation modes available which allow you to conduct a range of performance tests and functions: Accel, Decel, Lap Timing, and Speed.



Decel

| 029.2 | 18.11 | 18.12 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14 | 18.14

More info





Example Screens for Acceleration Testing

See links above for more information on the other operation modes.

Primary Screen



- Acceleration tests including: 0–60, 0–100, 0–100–0 and 0–¼ mile.
- Custom speed, distance or 0-speed-0 tests can be configured, and other
 options include enabling or disabling alert at end of test, one-foot rollout and
 slope correction.
- Can display up to 4 concurrent test results.
- Screen displays time, run number, distance, VMAX, Peak G, and altitude difference. Units of measurement for speed or distance can be easily swapped between metric or imperial.

Secondary Screen

ACCEL 👷 🙃 💸			
253.0 км/н		0-60	0.98 _s
		0-100	1.74s
PEAK G	1.77	0-100-0	9.90s
VMAX	273.89	0-402 M	8.47 s
		J C	Θ

Best Result

ACCEL	SI		
BEST RESULTS KM/H		0-60	0.98 _s
		0-100	1.74s
PEAK G	1.77	0-100-0	44.04s
VMAX	273.89	0-402 M	8.47 s
©	,	C C	Θ

Accel Results





Environmental and Physical

Environmental & Physical			
Input Voltage	5 V (USB compliant 4.4 V – 5.3 V)		
Power consumption (Connected to external power supply)	< 7 W		
With Battery	using 1.5 A or greater USB supply via micro-B		
Without Battery	< 3 W Using 0.9 A or greater USB supply via micro-B		
Operating Temperature	-20°C to +50°C		
Storage Temperature	-30°C to +80°C		
Size With battery attached Without battery	136.3 x 90.4 x 38.3 mm 136.3 x 90.4 x 36.3 mm		
Weight With battery Without battery	336 g 226 g		
Battery	11 Wh		
Capacity Run time	6 hrs normal use from full charge		
Time to charge	95% charge at 3.5 hrs, dependant on unit power demands and power supply.		
Touch Screen			
Size	4.3" TFT Capacitive Touch		
Resolution	480*800 pixels		
TFT LCD Display Colours	262K colours (18 Bit)		
Mounting			
Mount Type	Herbert Richter Mounting System		
Data Storage			
Туре	SD card (8 GB supplied)		
Recording Time	120 hours on supplied SD card.		



Diagrams

Without Battery







With Battery












Screen

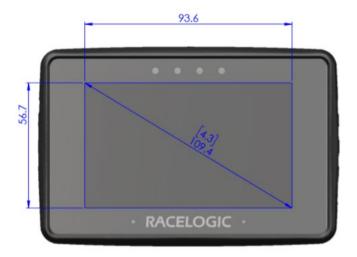



GPS Specifications

Velocity		Distance	
Accuracy	0.1 km/h	Accuracy	0.05% (<50 cm per km)
Units	km/h or mph	Units	Metres / Feet
Update rate	10 Hz	Update rate	10 Hz
Resolution	0.01 km/h	Resolution	1 cm

Absolute Positioning		Time	
Accuracy	±2 m 95% CEP*	Accuracy	0.01 s
Height accuracy	±10 m 95% CEP*	Resolution	0.01 s
Resolution	1 cm		
Update rate	10 Hz		

Acceleration		Heading	
Accuracy	1%	Accuracy	0.3°
Resolution	0.01 g	Resolution	0.01°
Maximum	4 g		
Update rate	10 Hz		

Definitions:

* CEP = Circle of Error Probable. 95% CEP means 95% of the time the position readings will fall within a circle of the stated radius.



Package content

Performance Box Touch is available in two versions. There are no differences in functionality between the two, only in which peripherals are included:

Description of RLPBT	Product Code
1x Performance Box Touch unit only	PBT-V1
1x Windscreen Suction Mount	ACSMOUNT
1x Cigar Plug USB Adaptor	RLACS184
1x USB 2.0 A to Right Angle Micro B Charging Cable 1.5m lead	USB2-007241
1x 8 GB SD Ultima Pro UHS-1 Memory Card	RLACS313

Description RLPBT/B	Product Code
Same as RLPBT, plus:	
1x Performance Box Touch Battery	RLACS290
1x GPS / GLONASS Low Profile Antenna 2m cable	RLACS284
1x Plastic Carry Case	RLACS281

Supplied software

Each Performance Box Touch is supplied with a SD card containing the VBOX Test Suite and Circuit Tools software. This software allows the user to display and analyse the information recorded by the Performance Box Touch.

Features include graphical display of logged parameters, full circuit plot, overlaid comparison laps and detailed performance analysis. More help and information available via Racelogic <u>Support Centre</u>.

