


Motec

M DHALL HS230 DIFFERENTIAL HALL SENSOR

1	DRAIN	WHITE/BLACK
2	0V	BLACK
3	SIG	WHITE
4	8V	RED

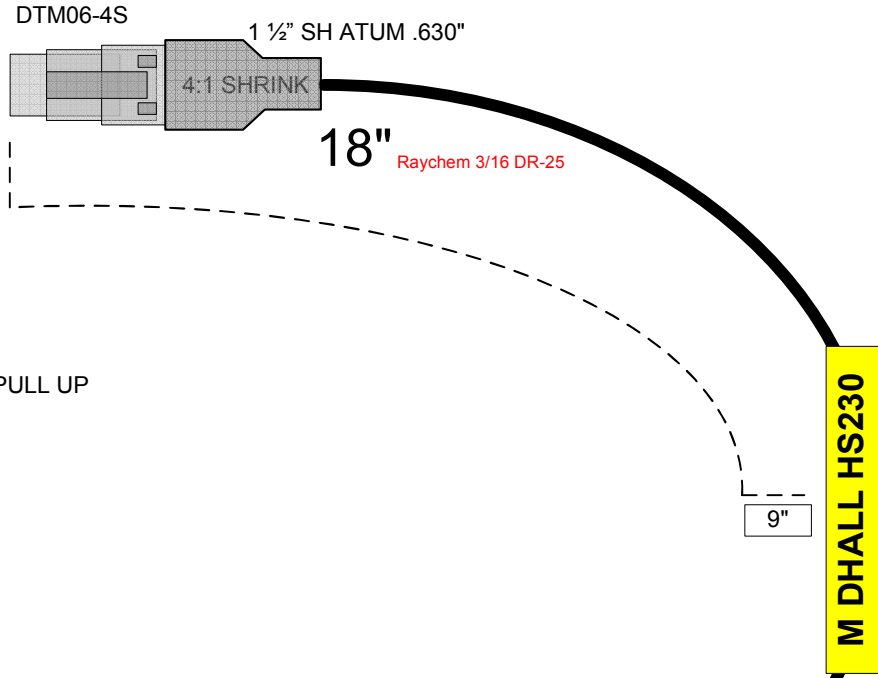

- * INPUT VOLTAGE V_{cc}: +4.5 TO 24 VDC
- * OUTPUT: OPEN COLLECTOR NPN WITH INTERNAL 4.7K OHM PULL UP
- * FREQ. RANGE: 0-12 KHz
- * AIRGAP: ~ 0.030" - 0.060"
- * OPERATING TEMPERATURE: -20 C TO 140 C
- * VIBRATION: 15G, 10-2000 Hz
- * INTERNAL REVERSE POLARITY PROTECTION

