75130
SAE "B" TO SAE "B" WET

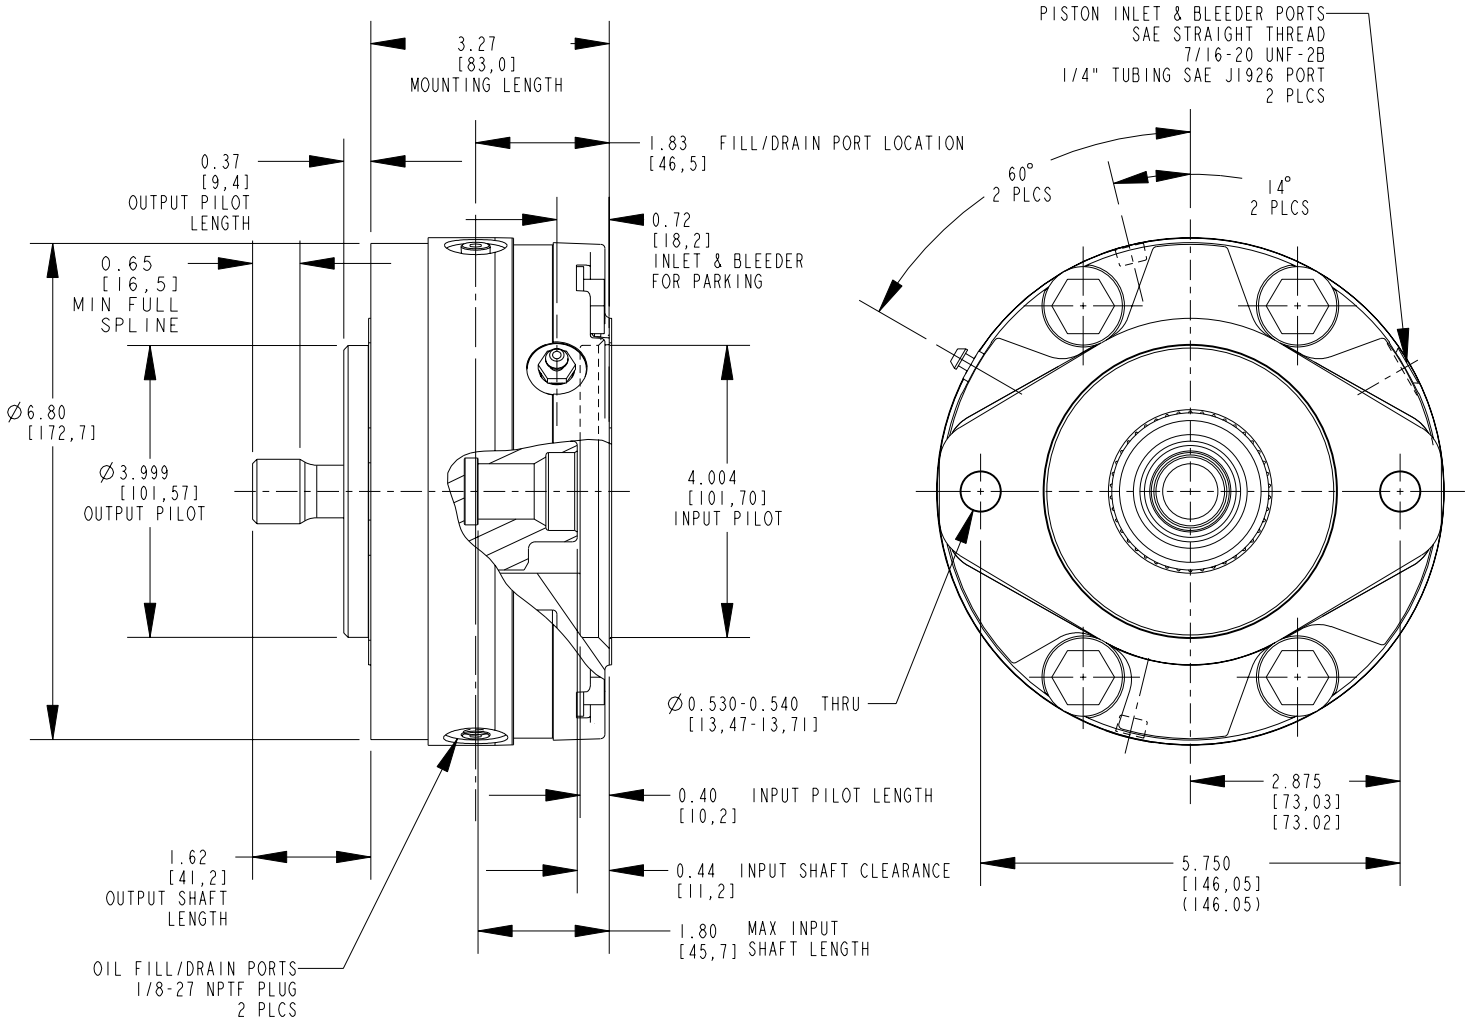

RATED TORQUE	3200 (362)
FULL RELEASE PRESSURE	220 (15)
INPUT SPLINE (INTERNAL)	13T 16/32 ANSI B92.1 SIDE FIT 30° PRESSURE ANGLE
OUTPUT SPLINE (EXTERNAL)	13T 16/32 ANSI B92.1 SIDE FIT 30° PRESSURE ANGLE
OIL FILL VOLUME HORIZONTAL (mL)	160
OIL FILL VOLUME VERTICAL (mL)	320
O-RING SERVICE KIT	PK-1324
STACK SERVICE KIT	PK-1323
BEARING SERVICE KI	PK-1320
GASKET SERVICE KIT	PK-1325

* UNITS: LENGTH,DIAMETER = IN (mm), PRESSURE = PSI (BAR), TORQUE = LBS IN (Nm)
* MAX OPERATING PRESSURE FOR PARKING is 3000PSI (207 BAR).
* PRESSURE SPIKES OR SURGES ARE NOT TO EXCEED 4000 PSI (276 BAR).
* BRAKE CAVITY COOLING OIL PRESSURE NOT TO EXCEED 15 PSI (1 BAR).
* MAXIMUM HORIZONTAL OPERATING SPEED IS 5000 RPM.
* FOR VERTICAL APPLICATION, CONTACT AUSCO FOR MAX SPEED DETAILS.
* REVIEW IMPORTANT NOTES ON GENERAL INFORMATION.